



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





LattePanda (4G/64GB/Without win10 License) - The Most Powerful Win10 Dev Board

SKU:DFR0419




INTRODUCTION

LattePanda is the most powerful dev board in the market. It is based on intel Atom CherryTrail chip which is able to run full version of windows 10. It also supports Linux and Android, make it the only dev board that can run windows/linux/android.

It includes everything a regular PC has and can do anything that a regular PC does. It is compatible with almost every gadget you know: printers, joysticks, cameras and more. Any peripherals that work on your PC will work on LattePanda.

LattePanda is able to install full edition of Windows 10, including powerful tools such as Visual Studio, NodeJS, Java, Processing, and more. Using existing APIs, you can develop your own software and hardware projects on LattePanda as you would on a normal PC - C#, Javascript, Ruby and so on.

LattePanda is also designed with an Arduino compatible co-processor, which means it can be used to control and sense the physical world, just like an Arduino board! Whether you are a Windows developer, an IoT developer, a hardware DIY fanatic, interactive designer, robotics whizz, or a maker, LattePanda can aid your creative process with physical computing projects!

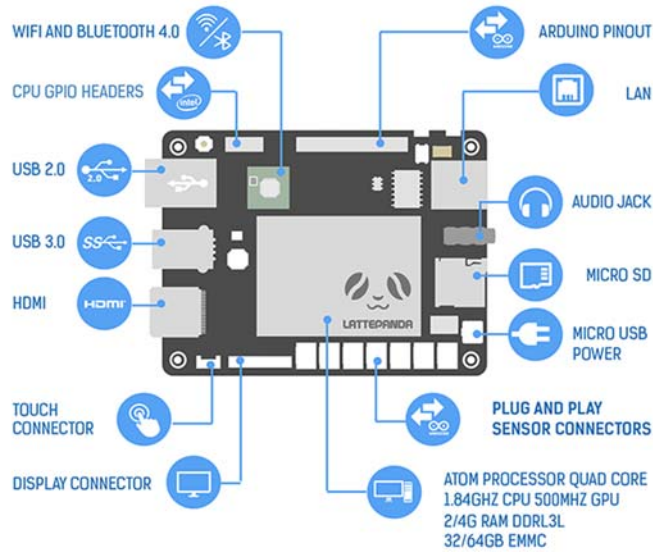

SYSTEM		
FEATURES	LATTEPANDA	RASPBERRY PI 2
PROCESSOR	Intel Cherry Trail Quad Core 1.8GHz	ARM Cortex-A7 Quad core 900MHz
OPERATING SYSTEM	Pre-installed Full Edition Of Windows 10	Linux/Android
CACHE	2MB	128KB
RAM	2GB DDR3L-4GB DDR3L (LattePanda Enhanced)	1GB DDR2
GRAPHICS CAPABILITIES	Intel Gen8	Broadcom VideoCore IV
VIDEO SUPPORTED	1080p 60 HEVC decode, H.264, VP8	1080p30 H.264/MPEG-4
VIDEO OUT	HDMI Display Connector	HDMI
STORAGE CAPABILITY	32GB-64GB (LattePanda Enhanced)	✗
MICROSD SLOT	✓	✓
CO-PROCESSOR	Armega32u4 Arduino Compatible	✗
PERIPHERALS/UTILITIES		
FEATURES	LATTEPANDA	RASPBERRY PI 2
USB	USB 3.0 x1 USB 2.0 x2	USB 2.0 x4
ETHERNET	RJ45	RJ45
INTEGRATED WIFI	✓	✗
INTEGRATED BLUETOOTH 4.0	✓	✗
OTHER FEATURES		
FEATURES	LATTEPANDA	RASPBERRY PI 2
SERIAL PORTS	1port for Intel chip 1 port for Arduino	1
OTHER INTERFACES	IIC for Intel chip Touch Screen Connector 3.5mm Audio port	IIC, SPI
GENERAL PURPOSE I/O	2 GPIOs for Intel chip 20 GPIOs for Arduino	17
POWER SUPPLY	5V	5V
DIMENSIONS	3.46"x 2.76"	3.37"x2.22"
WAKE ON LAN	✓	✓

1. This product requires a power supply of 5v@2a to work properly using a quality USB cable. An iPad power supply is ideal.

2. **DO NOT USE** quick charger! It will damage the board!!!

SPECIFICATION

- Processor: Intel Cherry Trail Z8300 Quad Core 1.8GHz
- Operation System: Full edition of Windows 10 / Linux
- Ram: 4GB DDR3L
- Storage Capability: 64GB
- USB:
 - USB 3.0*1
 - USB 2.0*2
- WiFi and Bluetooth 4.0
- Co-processor: ATmega32u4
- GPIO: 2 GPIOs for Intel chip 20 GPIOs for Arduino
- Power: 5v/2A
- Dimension: 3.46"x2.76"
- Weight: 100g

SHIPPING LIST

- LattePanda 2G/32GB x1
- WiFi Antenna x1
- Safety Precautions x1