



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1008TX Industrial Ethernet Switch

N-Tron Networking Series



▶▶▶ Industrial Unmanaged Gigabit Ethernet Switch

The unmanaged 1008TX Gigabit Ethernet switch features plug-and-play operation for up to eight 10/100/1000Base-T(X) connected devices in a compact industrial enclosure.

Red Lion's N-Tron® series 1008TX features eight Gigabit Ethernet ports in a hardened DIN-rail enclosure with redundant power inputs. The 1008TX unmanaged Ethernet switch provides expanded connectivity, plug-and-play installation, and jumbo frame support for high bandwidth applications. Ideal for deployment in oil and gas, water/wastewater, utility, transportation, mining and factory floor networking applications; the 1008TX enables customers to address the most demanding industrial communication requirements while providing high throughput and minimum downtime.



APPLICATIONS

- > Oil & Gas
- > Water/Wastewater
- > Utility
- > Transportation
- > Mining
- > Manufacturing

PRODUCT HIGHLIGHTS

- > Gigabit Network Performance
- > Plug-and-Play Operation
- > 10 to 49 VDC Redundant Power Inputs
- > -40° to 85°C Wide Operating Temperature

FEATURES & BENEFITS

- > Eight 10/100/1000Base-T(X) RJ45 Ports
 - Quickly expand to meet Gigabit network application requirements
- > Unmanaged Switch Operation
 - IEEE 802.3, 802.3u and 802.3b compliance
 - Supports full/half duplex modes
 - Up to 16 Gb/s maximum throughput
 - Full wire speed communications
 - Jumbo frame support
 - Store-and-Forward switching technology
- > Redundant 10 to 49 VDC Power Inputs
 - Keeps network running in the event of a power supply failure
- > Extended Environmental Specifications
 - -40° to 85°C operating temperature range
 - > 2M Hours MTBF
 - UL/cUL: Class I, Div 2 Groups A, B, C and D
 - Designed to comply with IEEE 1613 for electric utility substations and NEMA TS1/TS2 for Traffic control
 - ABS for shipboard applications
- > LED Status Lights
 - Display power and connectivity conditions
- > Hardened Metal DIN-Rail Enclosure

industrial
networking



1008TX Specifications

SWITCH PROPERTIES

Operation: Unmanaged
Number of MAC Addresses: 8,000
IEEE Compliant: 802.3, 802.3u, and 802.3ab
Latency (typical): 3.2 μ
Switching Method: Store-and-Forward
Activity Status Indication: LED link
MTBF: >2 million hours
Supports Full/Half duplex operation
Maximum Throughput: Up to 16.0 Gb/s
MDIX Auto Sensing cable
Auto Sensing Speed and Flow Control
Communications: Full Wire Speed

POWER INPUT

Input Voltage: 10-49 VDC
Steady Input Current: 250 mA @ 24 V
Inrush: 20 A / 60 us @ 24 VDC
BTU/HR: 20.5

CONNECTORS

10/100/1000BaseT: Eight (8) RJ-45 TX copper ports

NETWORK MEDIA

10BaseT: \geq Cat3 cable
100BaseTX: \geq Cat5 cable
1000BaseT: \geq Cat5e cable


RECOMMENDED WIRING CLEARANCE

Front: 2" (5.08 cm)
Top: 1" (2.54 cm)

ENVIRONMENTAL

Operating Temperature: -40°C to 85°C
Storage Temperature: -40°C to 85°C
Operating Humidity: 10% to 95% (Non Condensing)
Operating Altitude: 0 to 10,000 ft.
Shock: 200 g @ 10 ms
Vibration/Seismic: 50 g, 10-200 Hz, triaxial

DIMENSIONS in inches (mm)

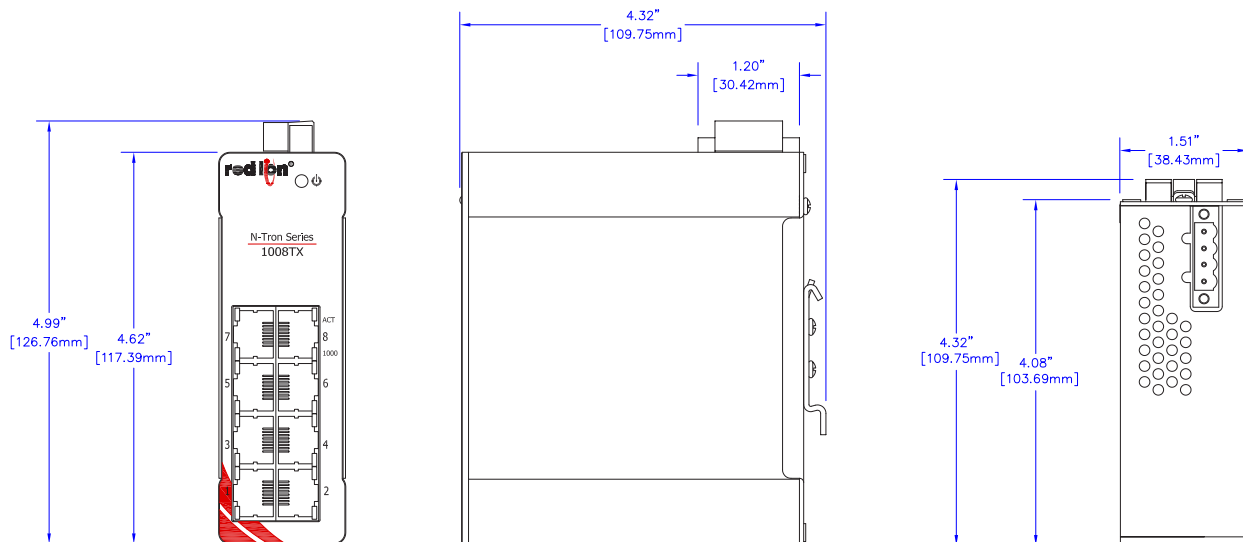

CERTIFICATION & COMPLIANCE

Product Safety: UL/cUL: Class I, Division 2, Groups A, B, C and D;
T4 UL 508, ANSI/ISA-12.12.01-2013, C22.2 No.14-M05
and C22.2 No.213-M1987
Immunity: CE, EN 61000-4/2/3/4/5/6, EN 61000-6-2/4
Emissions: EN 55011, ICES-003, FCC/CE (CFR 47, Part 15,
Subpart B, Class A)
Rail: EN 50155, EN 50121 and EN 61373
ABS Type Approval for Shipboard Applications
RoHS compliant
Designed to comply with: IEEE 1613 for Electric Utility Substations
NEMA TS1/TS2 for Traffic Control

MECHANICAL

Case Dimensions
Height: 4.62" (11.73 cm)
Width: 1.51" (3.84 cm)
Depth: 4.08" (10.36 cm)
Weight: 0.90 lbs (0.49 kg)
Mount: DIN Rail 35 mm

WARRANTY

3 years on design and manufacturing defects

ORDERING GUIDE

PART NUMBER	DESCRIPTION
1008TX	Eight Port 10/100/1000BaseT Unmanaged Industrial Ethernet Switch
NTPS-24-1.3	DIN-Rail Power Supply 24V@1.3 Amp
1000-PM	Panel Mount Kit

All specifications are subject to change. Consult the company website for more information.



www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

**Europe
Middle East
Africa**
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0372 040615 ©2015 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.