



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!







Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




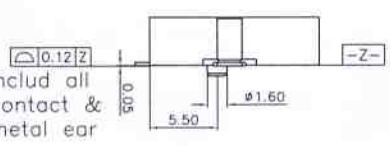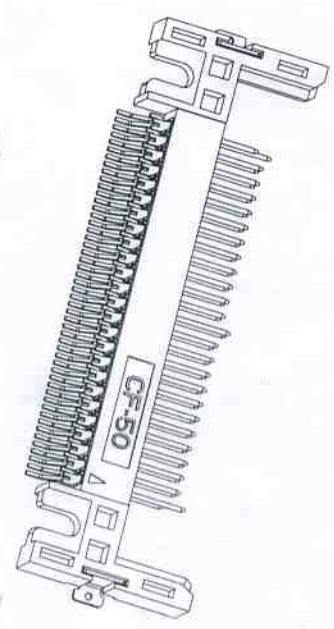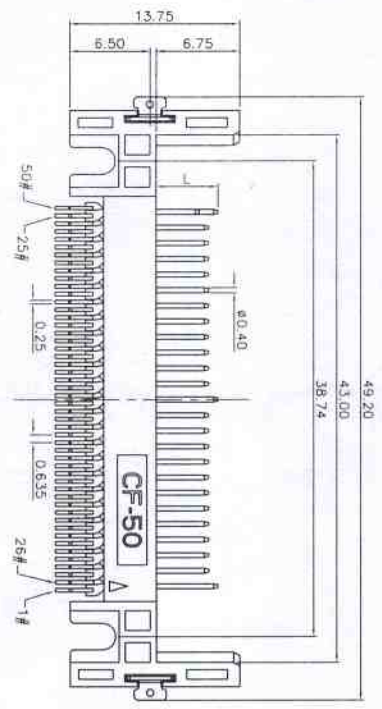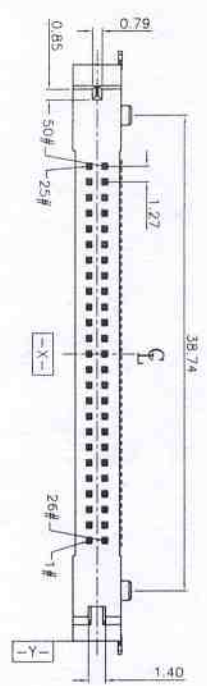

THE PART NUMBER:
101-00178-**

Pin Type	Interface Dim L	Pin No.
detect	3.50MM	25, 26
General	4.25MM	all other pins
power	5.00MM	1, 13, 38, 50

- 29:功能區鍍金10u",鍍鍍光亮鍍針至少160u"
- 30:功能區鍍金3u",鍍鍍光亮鍍針至少160u"
- 31:功能區鍍金5u",鍍鍍光亮鍍針至少160u"
- 32:功能區鍍金10u",鍍鍍光亮鍍針至少160u"
- 33:功能區鍍金15u",鍍鍍光亮鍍針至少160u"
- 34:功能區鍍金30u",鍍鍍光亮鍍針至少160u"
- 64:功能區鍍金1u",鍍鍍光亮鍍針至少160u"
- 65:功能區鍍金3u",鍍鍍光亮鍍針至少160u"
- 66:功能區鍍金5u",鍍鍍光亮鍍針至少160u"
- 67:功能區鍍金10u",鍍鍍光亮鍍針至少160u"
- 68:功能區鍍金15u",鍍鍍光亮鍍針至少160u"
- 69:功能區鍍金30u",鍍鍍光亮鍍針至少160u"

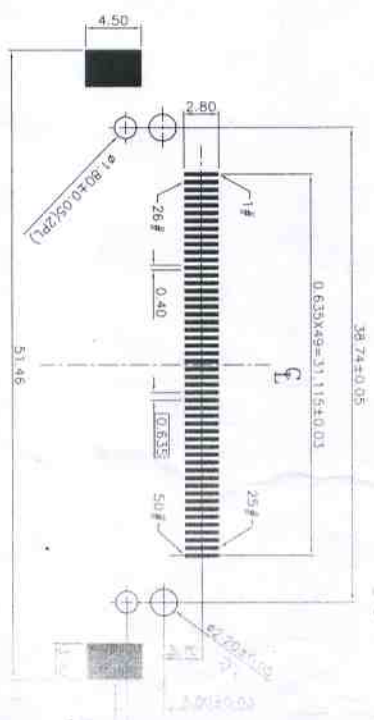

- Notes:
1. All Dimensions are in Millimeters.
 2. Operation voltage: 100 VAC max.
 3. Current rating : 1 Amps max.
 4. Contact resistance: 40m ohms max.
 5. Insulation resistance: 1000M ohms min 500 VDC
 6. Dielectric withstanding voltage: 500 VAC / 1minute
 7. Operating Temperature: -20°C to +60°C
 8. Storage Temperature: -40°C to +70°C.
 9. Material see table.
 10. Total Mating Force : 28.8N (MAX) at 25 mm/minute
 11. Total Unmating Force: 4.9N (MAX) at 25 mm/minute
 12. Single Pin Retention Force: 9.8N(MIN) at 25 mm/minute

GENERAL TOLERANCE		FILE NO.	101-00178	PART NO.	101-00178-**	DRAWN	LOP	MATERIAL	SCALE	NO. SCALE	
X ± 0.50	X ± 5°	REV.	A	TITLE	CF Conn.-32(13.75,排形,板L-Post38.74有接地片,本色)	CHECKED	hm/vw4/19	DATE	04/13/2006	UNIT	mm
X ± 0.38	X ± 2°	SIZE	A4	SHEET	1 OF 1	APPROVED	MBG/lr	Shouh Min Industry (ShenZhen) CO., LTD			
XX ± 0.25	XX ± 1°										

REV.	EQN. NO.	MODIFY CONTENT	DATE
A	ES:00004-038	改版	04/13/2006