



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





ETHERNET-INTELLIGENT  
OPERATOR INTERFACE



# OP7200 eDISPLAY SERIES

The compact eDisplay is an intelligent operator interface ideal for data acquisition and stand-alone systems such as factory floor controls


The OP7200 series of intelligent operator interfaces offers rugged I/O and Ethernet connectivity, along with optional A/D and touchscreen capabilities. The 10-Base-T Ethernet facilitates remote diagnostics, control and communication, including sending and receiving emails and alerts. Both models come equipped with a 1/4 VGA display with a 9-key keypad and programmable on/off white LED backlight. The OP7200 series also provides easy-to-use menu building software and offer a programmable audible alarm for prompt notification and keypad/display feedback.

Functionality of the OP7200 series can be expanded using the optional RabbitNet™ expansion cards. RabbitNet expansion cards can be tailored to a large variety of demanding applications.


## BENEFITS

- Rabbit® 2000 microprocessor at 22 MHz
- 1/4 VGA display (320 x 240 pixels)
- 10Base-T Ethernet, RJ-45
- 256K Flash/128K SRAM
- 24-27 industrialized I/O and 4 CMOS-compatible serial ports
- English and foreign language fonts
- Graphic and bitmap images
- Open source GUI libraries

## RELATED PRODUCTS

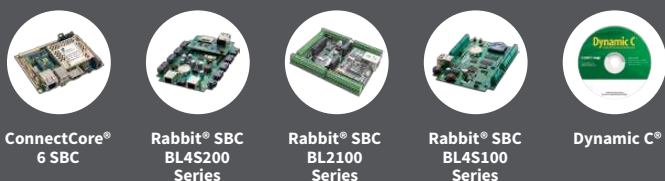

## APPLICATION EXAMPLE

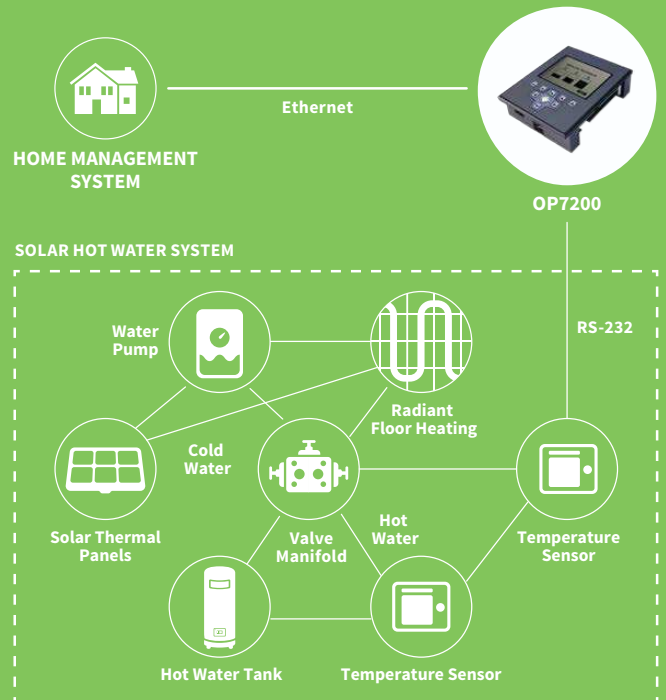

<b>SPECIFICATIONS</b>	<b>OP7200</b>	<b>OP7210</b>
-----------------------	---------------	---------------

FEATURE		
<b>MICROPROCESSOR</b>	Rabbit® 2000 at 22 MHz	
<b>ETHERNET PORT</b>	10/100-compatible with 10Base-T interface, RJ-45	
<b>FLASH MEMORY</b>	256K	
<b>SRAM</b>	128K	
<b>BACKUP BATTERY</b>	Socketed 3V lithium coin type, 265 mA·h	
<b>KEYPAD/DISPLAY</b>	¼ VGA (320 × 240 pixels) with programmable white LED backlight, black on white display, transfective FSTN LCD, 6 o'clock viewing angle; 9-key keypad	
<b>TOUCHSCREEN</b>	4096 × 4096 resistive touchscreen	None
<b>LEDS</b>	4: Power On, Microprocessor Error, Ethernet Link, Ethernet Activity	
<b>DIGITAL INPUTS</b>	19: Protected to ±36 VDC	16: Protected to ±36 VDC
<b>DIGITAL OUTPUTS</b>	8: Individually configurable in software to sink up to 350 mA each, 36VDC max., or source up to 250 mA each, 40VDC max	
<b>ANALOG INPUTS</b>	8 single-ended or 4 differential, 200 kΩ input impedance, 1.5 ksamples/s sampling rate Software-controlled ranges: 0–1V, 2V, 5V 10V, 20 VDC (11-bit single-ended, 12-bit differential)	None
<b>CONNECTORS</b>	Four 12-position screw-terminal headers, 0.1" pitch	Three 12-position screw-terminal headers, 0.1" pitch
<b>SERIAL PORTS</b>	4 serial ports: <ul style="list-style-type: none"> <li>2 RS-232 or 1 RS-232 (with CTS/RTS)</li> <li>1 RS-485 with onboard network termination and bias resistors or 1 RS-422 SPI master port</li> <li>One 5V CMOS-compatible programming port</li> </ul>	
<b>SERIAL RATE</b>	Max. burst rate = CLK/32, Max. sustained rate = CLK/64	
<b>REAL-TIME CLOCK</b>	Yes	
<b>TIMERS</b>	Five 8-bit timers (4 cascadable from the first), one 10-bit timer with 2 match registers	
<b>WATCHDOG/SUPERVISOR</b>	Yes	
<b>POWER</b>	9–40 VDC or 22–26 VAC, 4W max.	
<b>TEMPERATURE</b>	Operating Range: -10° C to +65° C; Storage Range: -30° C to +80° C	
<b>HUMIDITY</b>	20% to 70%, non-condensing	
<b>UNIT SIZE</b>	4.41" × 5.67" × 1.70" (112 mm × 144 mm × 43 mm)	

PART NUMBERS	DESCRIPTION
20-101-0535	OP7200 With touchscreen
20-101-0536	OP7210 Without touchscreen
20-101-0537	OP7200 With touchscreen and 512k Flash and SRAM
20-101-0538	OP7210 Without touchscreen and 512k Flash and SRAM

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2015 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001597  
C1/915

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL FRANCE**  
+33-1-55-61-98-98 / [www.digi.fr](http://www.digi.fr)

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

