



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





MICROPROCESSOR  
CORE MODULE



# RABBITCORE<sup>®</sup> RCM3209 SERIES

Ideal for engineers who want to rapidly develop and implement embedded systems with optional 10/100Base-T Ethernet connectivity

Based on the Rabbit<sup>®</sup> 3000, the RabbitCore RCM3209 series provides the capability to integrate real-time control and Ethernet connectivity into your design. Engineers are freed from the limitations of serial port communications, allowing worldwide connectivity using low-cost networking hardware. The RCM3209 series replaces the previous RCM3200 versions as it adds the full industrial temperature spec.


The RCM3209 series and Dynamic C<sup>®</sup> are designed in a complementary fashion for maximum performance and ease-of-use. Rabbit's industry-proven Dynamic C is a C language

environment that includes an editor, compiler and in-circuit debugger; no in-circuit emulator is required. An extensive library of drivers, sample programs and royalty-free TCP/IP stack with source code is included.

## BENEFITS

- Rabbit 3000 microprocessor at 44 MHz
- Optional 10/100Base-T Ethernet
- 512K Flash / 256K SRAM / 512K Program Execution SRAM
- 52 digital I/O and 6 serial ports for multiple device connectivity options
- Software debugging directly on target hardware

## APPLICATION EXAMPLE

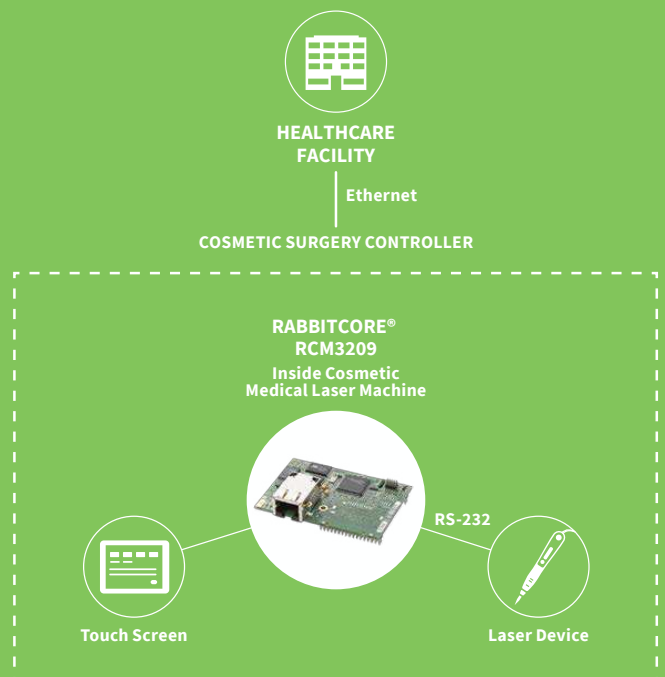

## RELATED PRODUCTS



RabbitCore<sup>®</sup>  
RCM3000  
Series



RabbitCore<sup>®</sup>  
RCM3700  
Series



RabbitCore<sup>®</sup>  
RCM4300  
Series



Dynamic C<sup>®</sup>



ConnectCore<sup>®</sup>  
9P 9215


# SPECIFICATIONS

# RCM3209

# RCM3229

## FEATURE

<b>MICROPROCESSOR</b>	Rabbit® 3000 at 44 MHz	
<b>EMI REDUCTION</b>	Spectrum spreader for reduced EMI (radiated emissions)	
<b>ETHERNET PORT</b>	10/100Base-T, RJ-45, 3 LEDs	N/A
<b>FLASH MEMORY</b>	512K	
<b>DATA SRAM</b>	256K	
<b>PROGRAM EXECUTION SRAM</b>	512K	
<b>BACKUP BATTERY</b>	Connection for user-supplied backup battery (to support RTC and data SRAM)	
<b>GENERAL-PURPOSE I/O</b>	52 parallel digital I/O lines: <ul style="list-style-type: none"> <li>• 44 configurable I/O</li> <li>• 4 fixed inputs</li> <li>• 4 fixed outputs</li> </ul>	
<b>ADDITIONAL INPUTS</b>	Startup mode (2), reset in	
<b>ADDITIONAL OUTPUTS</b>	Status, reset out	
<b>EXTERNAL I/O BUS</b>	Can be configured for 8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write	
<b>SERIAL PORTS</b>	6 shared high-speed, CMOS-compatible ports: <ul style="list-style-type: none"> <li>• All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC (with IrDA)</li> <li>• 1 asynchronous serial port dedicated for programming</li> <li>• Support for MIR/SIR IrDA transceiver</li> </ul>	
<b>SERIAL RATE</b>	Maximum asynchronous baud rate = CLK/8	
<b>SLAVE INTERFACE</b>	A slave port allows the RCM3209/RCM3229 to be used as an intelligent peripheral device slaved to a master processor, which may either be another Rabbit 3000 or any other type of processor	
<b>REAL-TIME CLOCK</b>	Yes	
<b>TIMERS</b>	Ten 8-bit timers (6 cascadable), one 10-bit timer with 2 match registers	
<b>WATCHDOG/SUPERVISOR</b>	Yes	
<b>PULSE-WIDTH MODULATORS</b>	10-bit free-running counter and four pulse-width registers	
<b>INPUT CAPTURE</b>	2- channel input capture can be used to time input signals from various port pins	
<b>POWER</b>	3.15V to 3.45 VDC 325 mA @ 3.3V	3.15V to 3.45VDC 190 mA @ 3.3V
<b>QUADRATURE DECODER</b>	Edge connectors for interface with 52-pin mini PCI Express socket	
<b>OPERATING TEMPERATURE</b>	-40° C to +85° C	
<b>HUMIDITY</b>	5% to 95%, non-condensing	
<b>CONNECTORS</b>	Two 2 × 17, 2 mm pitch	
<b>BOARD SIZE</b>	1.850" × 2.725" × 0.86" (47 mm × 69 mm × 22 mm)	

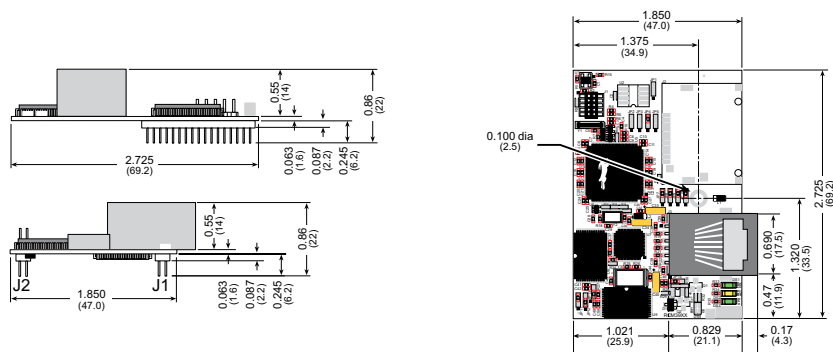

# PART NUMBERS

# DESCRIPTION

20-101-1179	RCM3209
101-0552	RCM3209 Development Kit Universal

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2016 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001586  
B2/816

DIGI INTERNATIONAL WORLDWIDE HQ  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

DIGI INTERNATIONAL FRANCE  
+33-1-55-61-98-98 / [www.digi.fr](http://www.digi.fr)

DIGI INTERNATIONAL JAPAN  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

DIGI INTERNATIONAL SINGAPORE  
+65-6213-5380

DIGI INTERNATIONAL CHINA  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

