



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FEATURES

- Accepts standard 32K x 8 CMOS static RAMs
- Embedded lithium energy cell retains RAM data
- Self-contained circuitry safeguards data
- Data retention time is greater than 10 years with the proper RAM selection
- Proven gas-tight socket contacts
- Operating temperature range 0°C to 70°C

PIN ASSIGNMENT

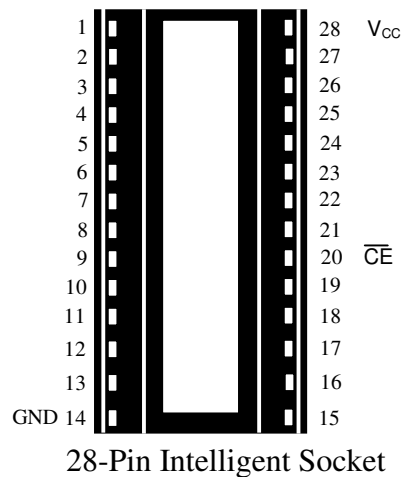

PIN DESCRIPTION

- | | |
|-----------------|---------------------------|
| \overline{CE} | – Conditioned Chip Enable |
| V_{CC} | – Switched V_{CC} |
| GND | – Ground |
- All pins pass through except 20 and 28.




DESCRIPTION

The DS1213C SmartSocket is a 28-pin, 600 mil DIP socket with a built-in CMOS controller circuit and an embedded lithium energy source. It accepts a 32K x 8 JEDEC byte-wide CMOS static RAM. When the socket is mated with a CMOS RAM, it provides a complete solution to problems associated with memory volatility. The SmartSocket monitors incoming V_{CC} for an out-of-tolerance condition. When such a condition occurs, the internal lithium energy source is automatically switched on and write protection is unconditionally enabled to prevent data corruption.

Using the SmartSocket saves printed circuit board space since the SRAM/SmartSocket combination occupies no more area than the memory alone. The SmartSocket uses only Pins 20 and 28 for RAM control. All other pins are passed straight through.

See the DS1213B SmartSocket data sheet for technical details.

DS1213C INTELLIGENT SOCKET 28-PIN (FOR 600 MIL DIP)

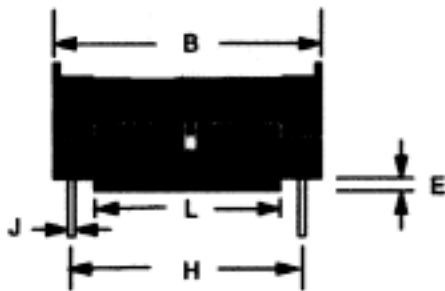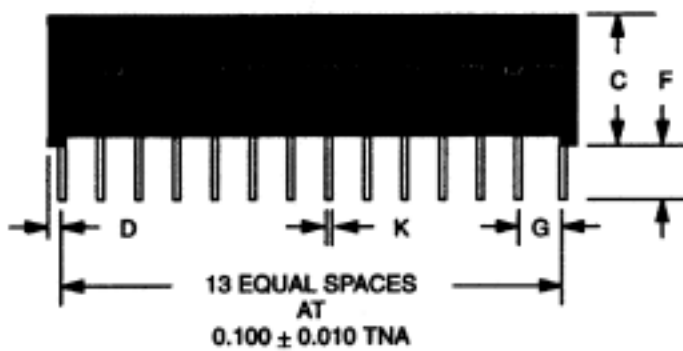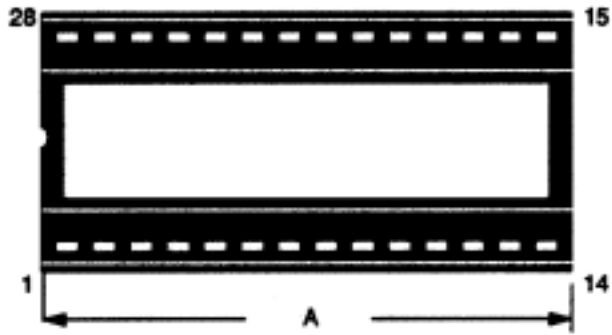

PKG	28-PIN	
	DIM	MIN
A IN.	1.380	1.420
	MM	35.05
B IN.	0.690	0.720
	MM	17.53
C IN.	0.420	0.470
	MM	10.16
D IN.	0.035	0.065
	MM	0.89
E IN.	0.055	0.075
	MM	1.39
F IN.	0.120	0.160
	MM	3.04
G IN.	0.090	0.110
	MM	2.29
H IN.	0.590	0.630
	MM	14.99
J IN.	0.008	0.012
	MM	0.20
K IN.	0.015	0.021
	MM	0.38
L IN.	0.380	0.420
	MM	9.65