



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





ULTRA COMPACT  
ETHERNET TO WI-FI  
BRIDGE



# RABBITCORE<sup>®</sup> RCM6600W

Embedded module with integrated 802.11 b/g Wi-Fi and 10/100 Ethernet, utilizing Digi Device Cloud<sup>SM</sup> to manage firmware updates and eliminate device deployment issues

The RCM6600W is a fully customizable, ultra compact embedded cloud module with an integrated 802.11b/g and 10/100 Ethernet interface. The dual networking interfaces software supports not only Ethernet to Wi-Fi bridging but also provides secure 802.11i - WPA2 support. The RCM6600W is easily programmable with royalty-free networking libraries, available in the comprehensive software environment Dynamic C. In addition, with up to six serial ports available the RCM6600W can connect to a host of devices such as XBee<sup>®</sup> ZigBee modules, GPRS and GPS devices, all of which have fully supported libraries within Dynamic C.


The RCM6600W supports Digi Device Cloud, an easy-to-use platform for device control and monitoring. In addition, Device Cloud provides scalability for managing firmware updates to literally thousands of devices with the click of a button.

The capabilities and features of the RCM6600W address many common device deployment concerns ultimately reducing development costs and time to market.

## BENEFITS

- Integrated 802.11b/g and 10/100 Ethernet networking
- 4 A/D inputs 12-bit resolution
- Clock speed up to 180 MHz
- Up to 32 GPIO line and 6 serial ports
- Manage firmware updates with Device Cloud
- Lightweight web server for monitoring and control
- ZigBee and GPS/3G cellular connectivity support
- FCC and CE certified

## APPLICATION EXAMPLE

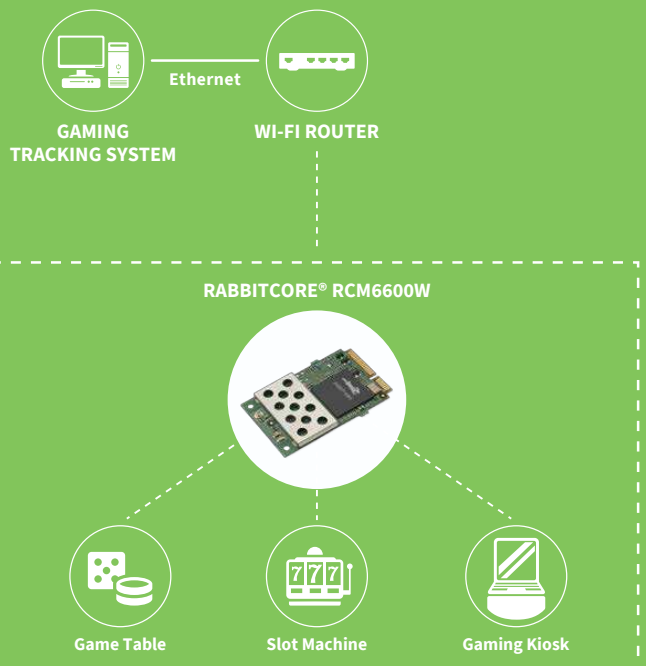

## RELATED PRODUCTS



Rabbit  
MiniCore<sup>®</sup>  
RCM6700



Digi Connect  
Wi-ME 9210



Development  
Kits



Dynamic C<sup>®</sup>



Digi Device  
Cloud<sup>SM</sup>



<b>SPECIFICATIONS</b>	<b>RCM6600W</b>	<b>RCM6650W</b>
-----------------------	-----------------	-----------------

FEATURES		
<b>MICROPROCESSOR</b>	Rabbit® 6000 @ 162.5 MHz	
<b>NETWORK PERIPHERALS</b>	10/100Base-T (Ethernet Signals only)	
<b>EMI REDUCTION</b>	Spectrum spreader for reduced EMI (radiated emissions)	
<b>SERIAL FLASH MEMORY (PROGRAM)</b>	1 MB	4 MB
<b>SRAM</b>	1 MB	
<b>BATTERY-BACKABLE SRAM</b>	32 KB (Internal)	32 KB (Internal), 1 MB (External)
<b>BACKUP BATTERY</b>	Connection for user-supplied backup battery (to support RTC)	
<b>GENERAL PURPOSE I/O</b>	Up to 35 parallel digital I/O lines configurable with 4 layers of alternate functions, plus FIM (Flexible Interface Module) control	
<b>ANALOG INPUTS</b>	0, 2 or 4-inputs shared with PE0, 1 or PE2, 3.12 bit resolution, 11 bits performance at up to 1 M sample/sec (125 k sample/sec for any one input with no CPU overhead). Input range 100 mV to VCC-100 mV typical.	
<b>ADDITIONAL INPUTS</b>	Reset in	
<b>ADDITIONAL OUTPUTS</b>	Status, reset out	
<b>EXTERNAL I/O BUS</b>	Can be configured for 8 data lines 8 address lines (shared with parallel I/O lines), plus I/O read/write	
<b>SERIAL PORTS</b>	6 high-speed, CMOS-compatible ports: All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC 1 clocked serial port shared with programming port	
<b>SERIAL RATE</b>	Maximum asynchronous baud rate = CLK/8	
<b>SLAVE INTERFACE</b>	Slave port allows the module to be used as an intelligent peripheral device slaved to a master processor	
<b>REAL-TIME CLOCK</b>	Yes	
<b>TIMERS</b>	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers	
<b>WATCHDOG/SUPERVISOR</b>	Yes	
<b>PULSE-WIDTH MODULATOR</b>	4 channels synchronized PWM with 10-bit counter or 4 channels variable-phase or synchronized PWM with 16-bit counter	
<b>INPUT CAPTURE</b>	2-channel input capture can be used to time input signals from various port pins	
<b>QUADRATURE DECODER</b>	2-channel quadrature decoder accepts inputs from external incremental encoder modules	
<b>POWER</b>	3.15 VDC (min.) - 3.45 VDC (max.) 625 mA @ 3.3 V while transmitting/receiving 85 mA @ 3.3 V while not transmitting/receiving	
<b>OPERATING TEMPERATURE</b>	-30° C to +55° C	
<b>HUMIDITY</b>	5% to 95%, non-condensing	
<b>CONNECTORS</b>	Edge connectors for interface with 52-pin mini PCI Express socket	
<b>BOARD SIZE</b>	1.20 in × 2.00 in × 0.40 in (30 mm × 51 mm × 10 mm)	
WI-FI SPECIFICATIONS		
<b>TYPICAL AVERAGE ANTENNA OUTPUT POWER</b>	Americas, Japan: 802.11b: 19 dBm; 802.11g: 15 dBm Other Regions: 802.11b: 18 dBm; 802.11g: 15 dBm	
<b>COMPLIANCE</b>	802.11b/g, 2.4 GHz	

PART NUMBERS	DESCRIPTION
20-101-1322	RCM6600W
20-101-1323	RCM6650W
101-1324	RCM6600W Deluxe Development Kit
101-1325	RCM6600W Standard Development Kit

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2017 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91002925  
C2/417

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL FRANCE**  
+33-1-55-61-98-98 / [www.digi.fr](http://www.digi.fr)

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

