



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Fast Recovery Epitaxial Diode (FRED)


DSEI 30

$I_{FAVM} = 30\text{ A}$
 $V_{RRM} = 1000\text{ V}$
 $t_{rr} = 35\text{ ns}$


| V_{RSM} | V_{RRM} | Type |
|-----------|-----------|--------------|
| V | V | |
| 1000 | 1000 | DSEI 30-10A |
| 1000 | 1000 | DSEI 30-10AR |



TO-247 AD
Version A



ISOPLUS 247™
Version AR



A = Anode, C = Cathode

* Patent pending

| Symbol | Test Conditions | Maximum Ratings | |
|-----------------|---|-----------------|------------------|
| I_{FRMS} | $T_{VJ} = T_{VJM}$ | 70 | A |
| I_{FAVM} ① | $T_C = 85^\circ\text{C}$; rectangular, $d = 0.5$ | 30 | A |
| I_{FRM} | $t_p < 10\ \mu\text{s}$; rep. rating, pulse width limited by T_{VJM} | 375 | A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$; $t = 10\text{ ms}$ (50 Hz), sine | 200 | A |
| | $t = 8.3\text{ ms}$ (60 Hz), sine | 210 | A |
| | $T_{VJ} = 150^\circ\text{C}$; $t = 10\text{ ms}$ (50 Hz), sine | 185 | A |
| | $t = 8.3\text{ ms}$ (60 Hz), sine | 195 | A |
| I^2t | $T_{VJ} = 45^\circ\text{C}$; $t = 10\text{ ms}$ (50 Hz), sine | 200 | A ² s |
| | $t = 8.3\text{ ms}$ (60 Hz), sine | 180 | A ² s |
| | $T_{VJ} = 150^\circ\text{C}$; $t = 10\text{ ms}$ (50 Hz), sine | 170 | A ² s |
| | $t = 8.3\text{ ms}$ (60 Hz), sine | 160 | A ² s |
| T_{VJ} | | -40...+150 | °C |
| T_{VJM} | | 150 | °C |
| T_{stg} | | -40...+150 | °C |
| P_{tot} | $T_C = 25^\circ\text{C}$ | 138 | W |
| M_d^* | Mounting torque | 0.8...1.2 | Nm |
| F_C | mounting force with clip | 20...120 | N |
| V_{ISOL}^{**} | 50/60 Hz, RMS, $t = 1\text{ minute}$, leads-to-tab | 2500 | V~ |
| Weight | | 6 | g |

* Version A only; ** Version AR only

Features

- International standard package JEDEC TO-247 AD
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low I_{RM} -values
- Soft recovery behavior
- Epoxy meets UL 94V-0
- Version AR isolated and UL registered E153432

Applications

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses
- Operating at lower temperature or space saving by reduced cooling

| Symbol | Test Conditions | Characteristic Values | |
|------------|---|-----------------------|---------------|
| | | typ. | max. |
| I_R | $T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ | 750 | μA |
| | $T_{VJ} = 25^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$ | 250 | μA |
| | $T_{VJ} = 125^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$ | 7 | mA |
| V_F | $I_F = 36\text{ A}$; $T_{VJ} = 150^\circ\text{C}$ | 2 | V |
| | $T_{VJ} = 25^\circ\text{C}$ | 2.4 | V |
| V_{T0} | For power-loss calculations only | 1.5 | V |
| r_T | $T_{VJ} = T_{VJM}$ | 12.5 | m Ω |
| R_{thJC} | 0.25 | 0.9 | K/W |
| R_{thCK} | | K/W | |
| R_{thJA} | | 35 | K/W |
| t_{rr} | $I_F = 1\text{ A}$; $-di/dt = 100\text{ A}/\mu\text{s}$; $V_R = 30\text{ V}$; $T_{VJ} = 25^\circ\text{C}$ | 35 | 50 ns |
| I_{RM} | $V_R = 540\text{ V}$; $I_F = 30\text{ A}$; $-di_F/dt = 240\text{ A}/\mu\text{s}$ $L \leq 0.05\ \mu\text{H}$; $T_{VJ} = 100^\circ\text{C}$ | 16 | 18 A |

① I_{FAVM} rating includes reverse blocking losses at T_{VJM} , $V_R = 0.8 V_{RRM}$, duty cycle $d = 0.5$

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

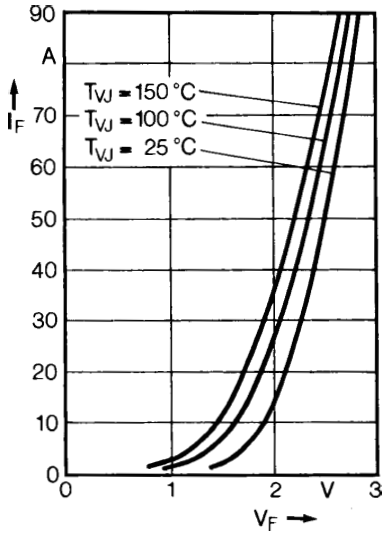


Fig. 1 Forward current versus voltage drop.

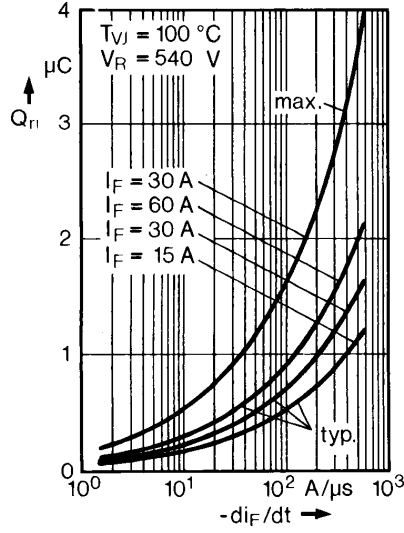


Fig. 2 Recovery charge versus $-di_F/dt$.

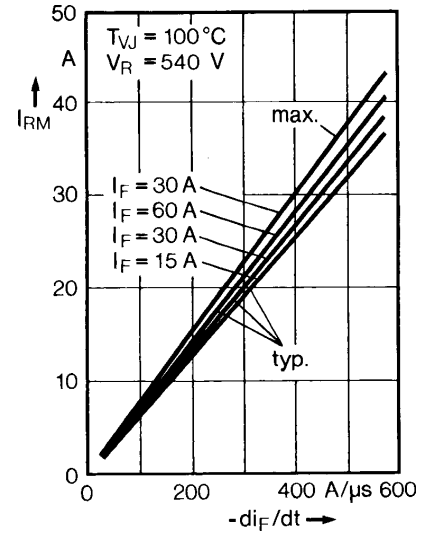


Fig. 3 Peak reverse current versus $-di_F/dt$.

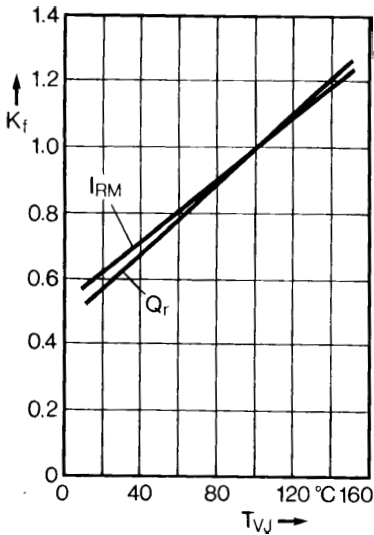


Fig. 4 Dynamic parameters versus junction temperature.

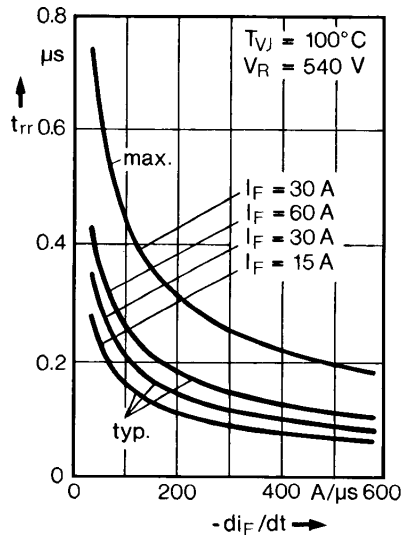


Fig. 5 Recovery time versus $-di_F/dt$.

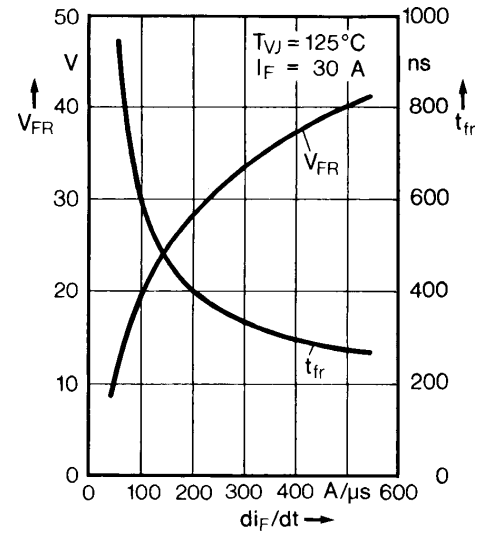


Fig. 6 Peak forward voltage versus di_F/dt .


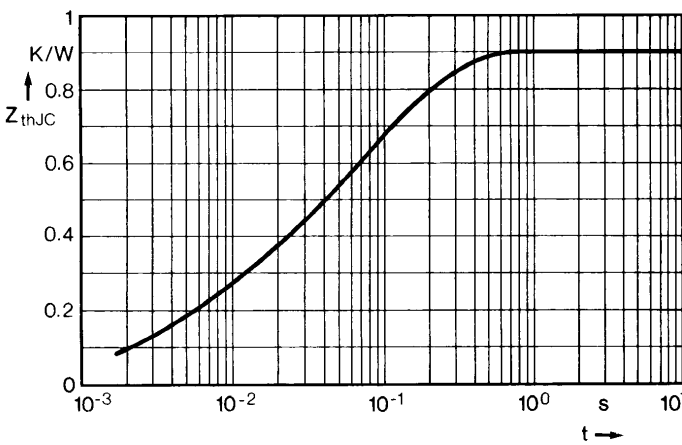


Fig. 7 Transient thermal impedance junction to case.

Dimensions



| Dim. | Millimeter | | Inches | |
|------|------------|-------|--------|-------|
| | Min. | Max. | Min. | Max. |
| A | 19.81 | 20.32 | 0.780 | 0.800 |
| B | 20.80 | 21.46 | 0.819 | 0.845 |
| C | 15.75 | 16.26 | 0.610 | 0.640 |
| D | 3.55 | 3.65 | 0.140 | 0.144 |
| E | 4.32 | 5.49 | 0.170 | 0.216 |
| F | 5.4 | 6.2 | 0.212 | 0.244 |
| G | 1.65 | 2.13 | 0.065 | 0.084 |
| H | - | 4.5 | - | 0.177 |
| J | 1.0 | 1.4 | 0.040 | 0.055 |
| K | 10.8 | 11.0 | 0.426 | 0.433 |
| L | 4.7 | 5.3 | 0.185 | 0.209 |
| M | 0.4 | 0.8 | 0.016 | 0.031 |
| N | 2.2 | 2.54 | 0.087 | 0.102 |