



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us





Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PRODUCT NUMBER SEE SHEET 2

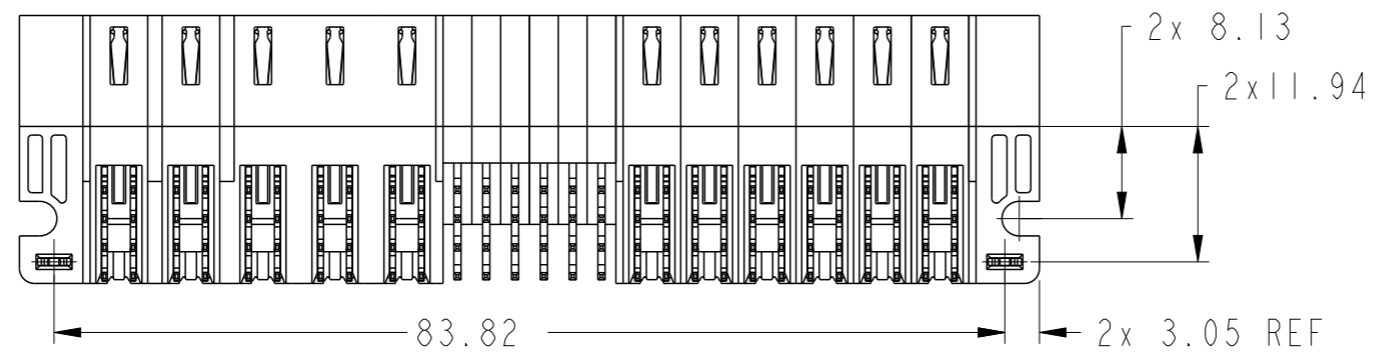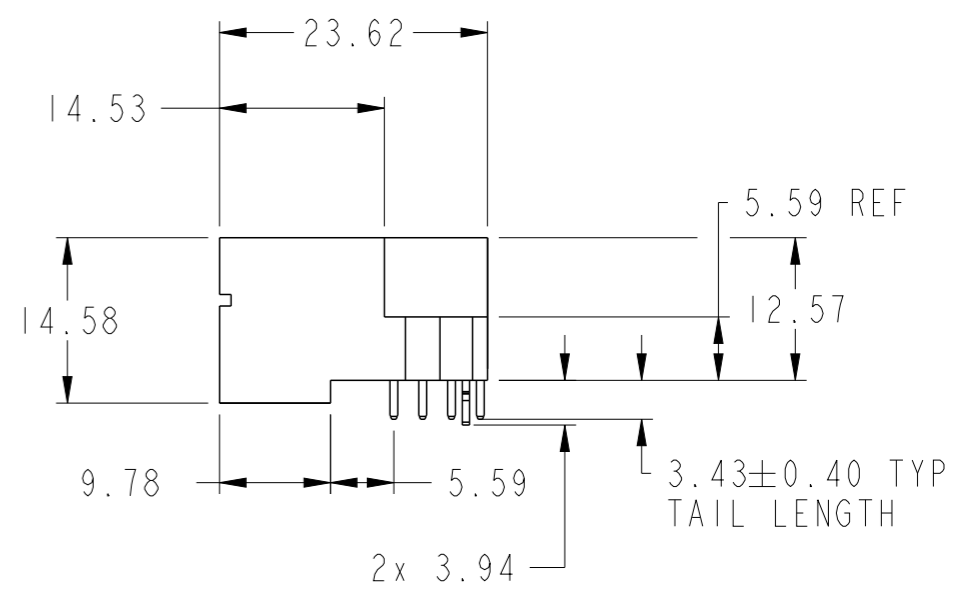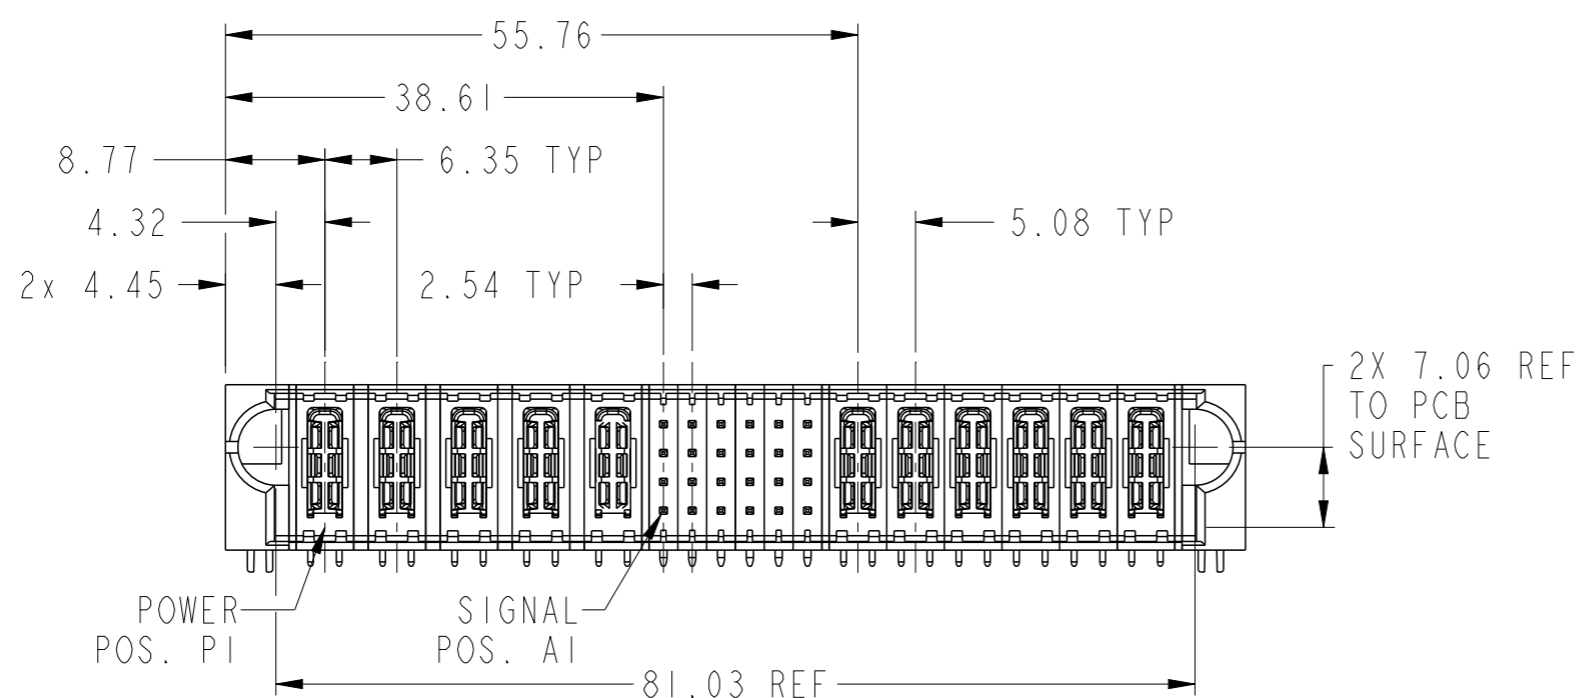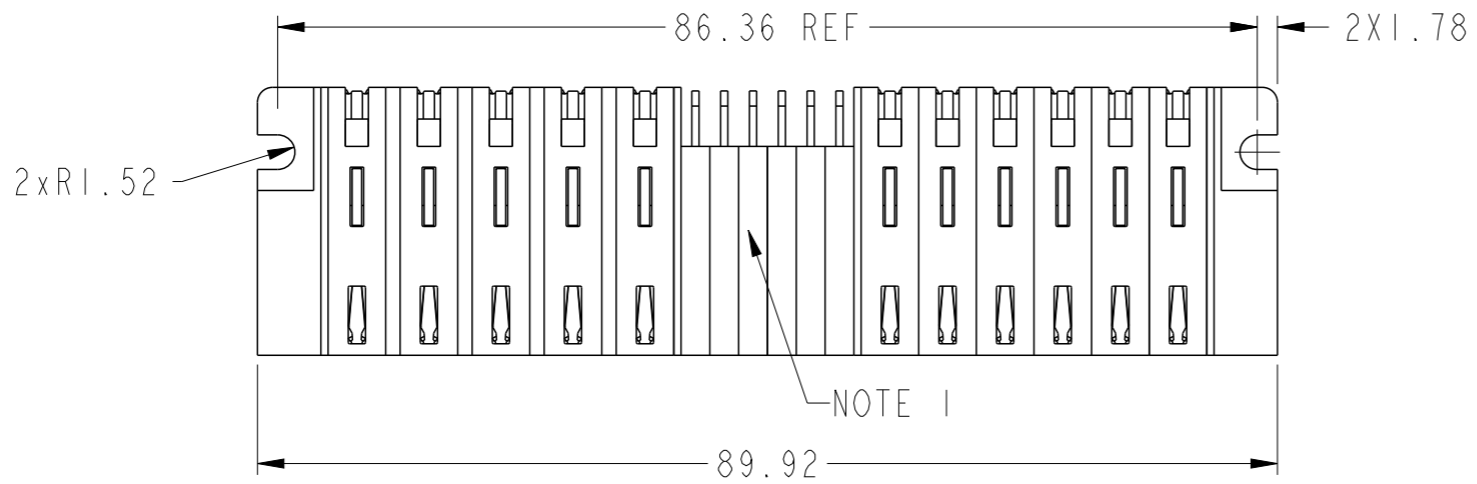


Amphenol
FCi

© 2016 AFCI

spec ref	*	dr	Rainbow Zhan	2014/06/10	projection	MM	size	A3	scale	3:2	
tolerance std	ASME Y14.5	eng	Rainbow Zhan	2016/09/12			ecn no	ELX-DG-24930-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2016/09/14			product family	PwrBlade+	rel level	Released	
surface	linear	appr	Pei-Ming Zheng	2016/09/14	5HP + 24S + 6HDP		dwg no	10106262-B006002		rev	B
ASME Y14.5	angular	www.fci.com		cat. no.	RA STB HEADER		Product - Customer Drw		sheet 1 of 3		

PRODUCT NO.	ROWS	HIGH POWER					SIGNAL						HIGH POWER					E2		
		E1	P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9		P10	P11
10106262-B006002LF	DCBA	HA	H1	H1	H1	H1	H1	UUUUUU	UUUUUU	UUUUUU	UUUUUU	UUUUUU	UUUUUU	H1	H1	H1	H1	H1	H1	HA

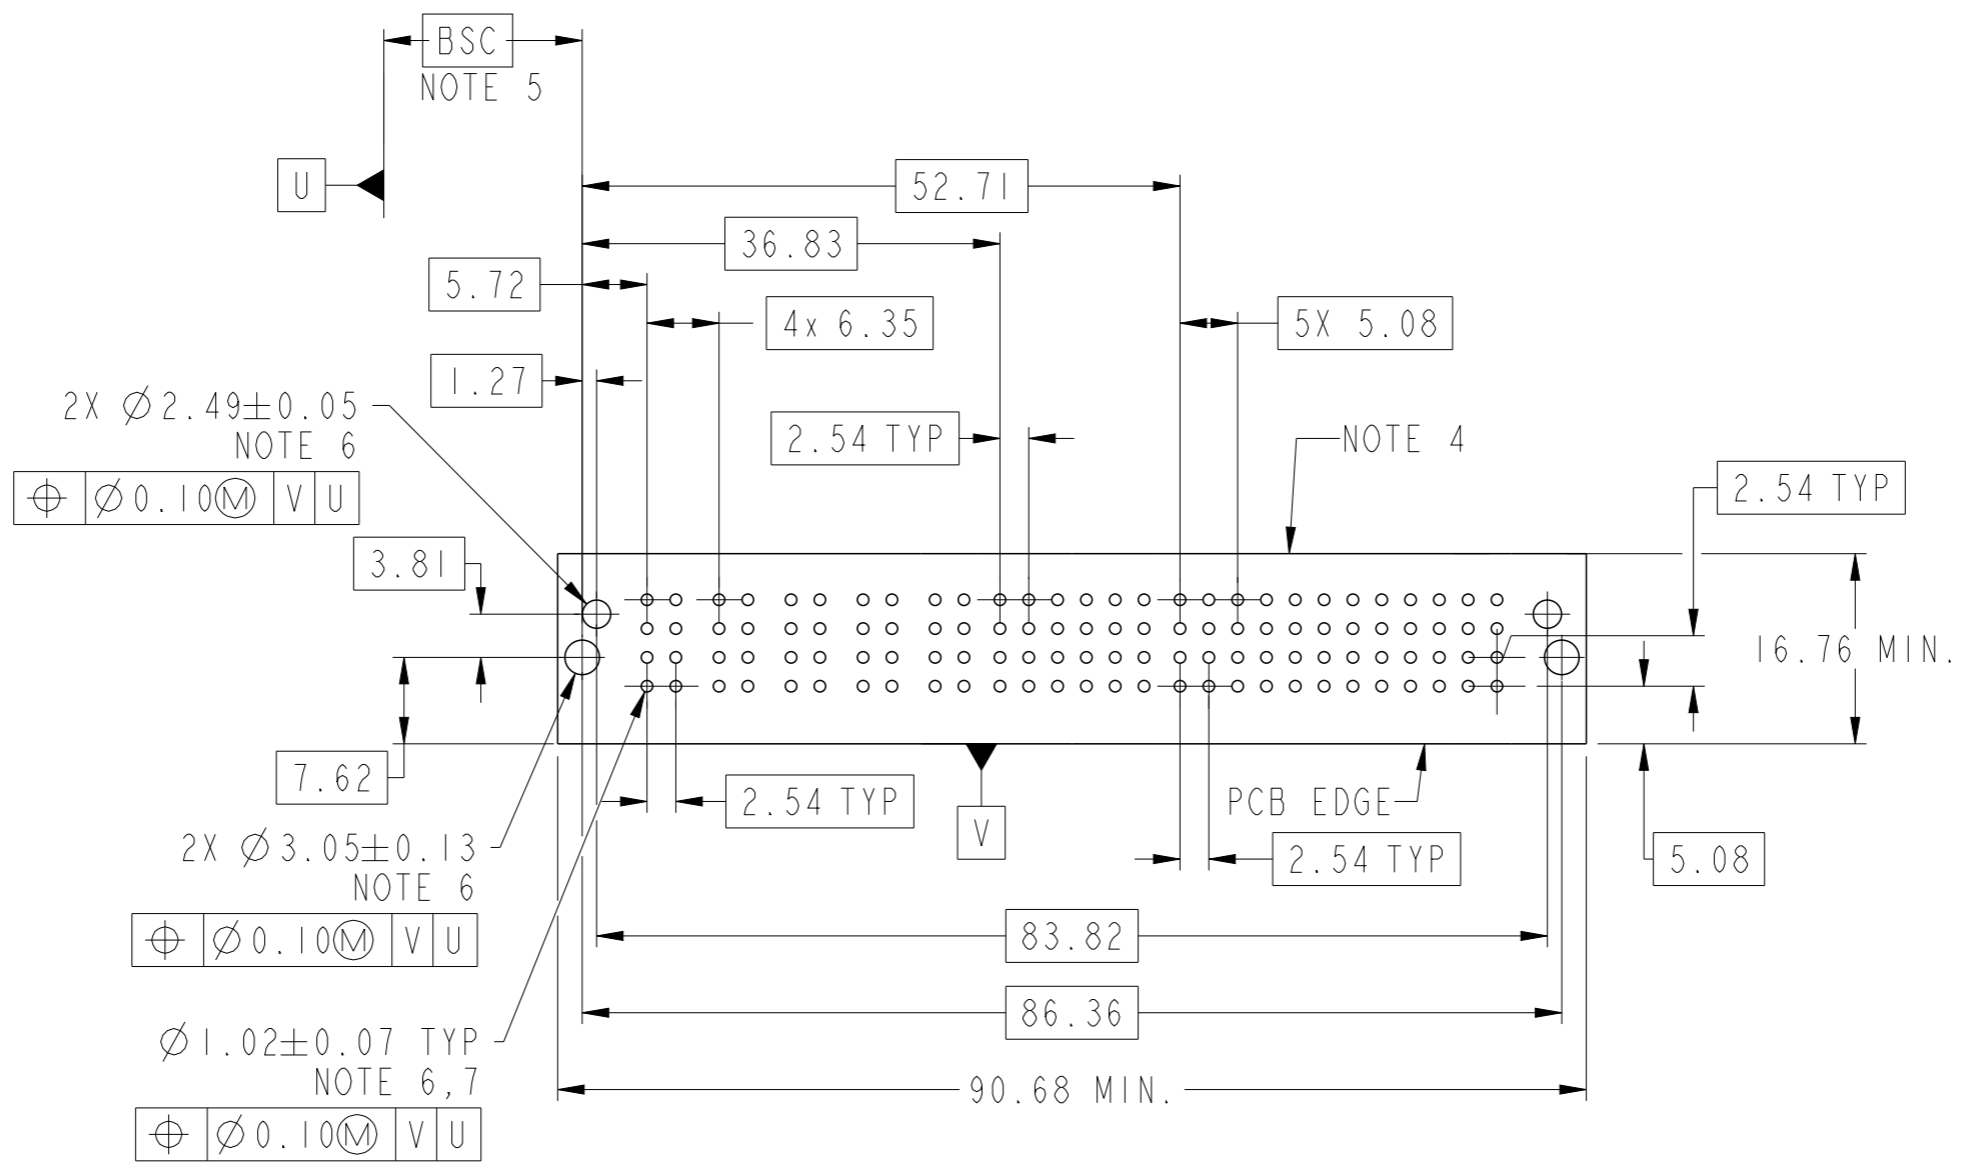

Amphenol FCI

© 2016 AFCI

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
H1	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

spec ref	*	dr	Rainbow Zhan	2014/06/10	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Rainbow Zhan	2016/09/12			ecn no	ELX-DG-24930-1		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2016/09/14			product family	PwrBlade+	rel level	Released
surface	linear	appr	Pei-Ming Zheng	2016/09/14				dwg no	10106262-B006002	
ASME Y14.5	angular	www.fci.com		cat. no.	5HP + 24S + 6HDP			rev	B	
		Product - Customer Drw			sheet 2 of 3					

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

Amphenol
FCi

© 2016 AFCI

spec ref *		dr	Rainbow Zhan	2014/06/10	projection	MM	size	A3	scale	3:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Rainbow Zhan	2016/09/12		←→	ecn no	ELX-DG-24930-1		
ASME Y14.5		chr	Fancy Zhang	2016/09/14				product family	PwrBlade+	
surface		linear	appr	Pei-Ming Zheng	2016/09/14	rel level	Released			
		ASME Y14.5	angular				5HP + 24S + 6HDP		dwg no	10106262-B006002
		www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3			