



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



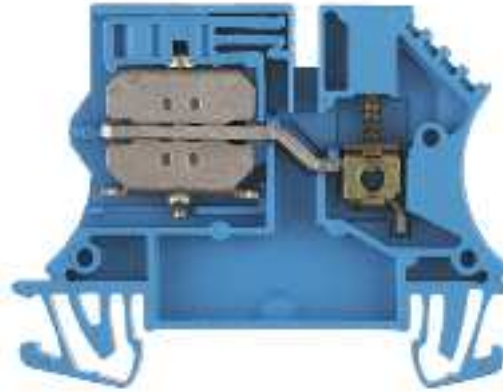

General ordering data

Order No.	1010680000
Part designation	WNT 2.5 10X3
Version	Neutral conductor modular terminal, 2.5 mm ² , Busbar connection, Wemid, blue, TS 35
EAN	4008190017897
Qty.	100 pc(s).

Product notes

Note, ordering data	2.5 mm ² conductor with wire end ferrule plus plastic collar only with collar optimised for diameter (order No. 1333100000, 500 pcs)
Note, technical data	Tightening torque, N-disconnector 0.4..0.6 Nm
Product description	These special modular terminals are specified for insulation measurements without disconnecting the conductor according to VDE standards for places of public assembly.

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Solid, min.	0.5 mm ²
Solid, max.	1.5 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	1.5 mm ²
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	1.5 mm ²

Additional technical data

Colour of insulating material	blue
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	No
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No

Additional technical data

No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Neutral conductor disconnect terminal

CSA rating data

Voltage (CSA)	600 V
CSA current	20 A
Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 12

Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm ²

Conductors for clamping (rated connection)

Clamping range, min.	0.13 mm ²
Clamping range, max.	4 mm ²
Type of connection	Busbar connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	1
Stripping length	10 mm
Clamping screw	M 2.5
Blade size	0.6 x 3.5 mm
Tightening torque range	0.4...0.6 Nm
Torque level with DMS electric screwdriver	1
Gauge to IEC 60947-1	A3
Solid, min.	0.5 mm ²
Solid, max.	4 mm ²
Stranded, min.	1.5 mm ²
Stranded, max.	4 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	4 mm ²
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228/1)	2.5 mm ²

Dimensions

Width	5.1 mm
Height of lowest version	47 mm
Length	60 mm
TS 35 offset	32 mm

Disconnect terminals

Torque level with DMS electric screwdriver 1

N-conductor disconnect terminal

For N-busbar 3 x 10 mm
Torque range (B1) 0.4...0.6 Nm

Rating data

Rated cross-section 2.5 mm²
Rated voltage 400 V
Rated impulse voltage 6 kV
Rated current 24 A
Standards IEC 60947-7-1
Current with max. conductor 32 A
Pollution severity 3

UL rating data

Voltage (UL) 600 V
Current (UL) 25 A
Min. cross-section (UL) AWG 22
Max. cross-section (UL) AWG 12

Approvals

Approvals institutes



Downloads

STEP 1010680000_08991_WNT_2.5_10X3_STP.stp

Classifications

eClass 4.1 27-14-11-20
eClass 5.0 27-14-11-38
eClass 5.1 27-14-11-38

Similar products

Order No.	Part designation	Version
101060000	WNT 2.5 10X3 BE	Neutral conductor modular terminal, 2.5 mm ² , Busbar connection, Wemid, dark beige, TS 35

1010780000	WNT 4 10X3	Neutral conductor modular terminal, 4 mm ² , Busbar connection, Wemid, blue, TS 35
1010700000	WNT 4 10X3 BE	Neutral conductor modular terminal, 4 mm ² , Busbar connection, Wemid, dark beige, TS 35
1010880000	WNT 6 10X3	Neutral conductor modular terminal, 6 mm ² , Busbar connection, Wemid, blue, TS 35
1010980000	WNT 10 10X3	Neutral conductor modular terminal, 10 mm ² , Busbar connection, Wemid, blue, TS 35
1010900000	WNT 10 10X3 BE	Neutral conductor modular terminal, 10 mm ² , Busbar connection, Wemid, dark beige, TS 35
1019000000	WNT 16N 10X3	Neutral conductor modular terminal, 16 mm ² , Busbar connection, Wemid, blue, TS 35
1718550000	WNT 35N 10X3	Neutral conductor modular terminal, 35 mm ² , Busbar connection, Wemid, blue, TS 35
9512210000	WNT 70N/35	Neutral conductor modular terminal, 70 mm ² , Busbar connection, Wemid, blue, TS 35