



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us




Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




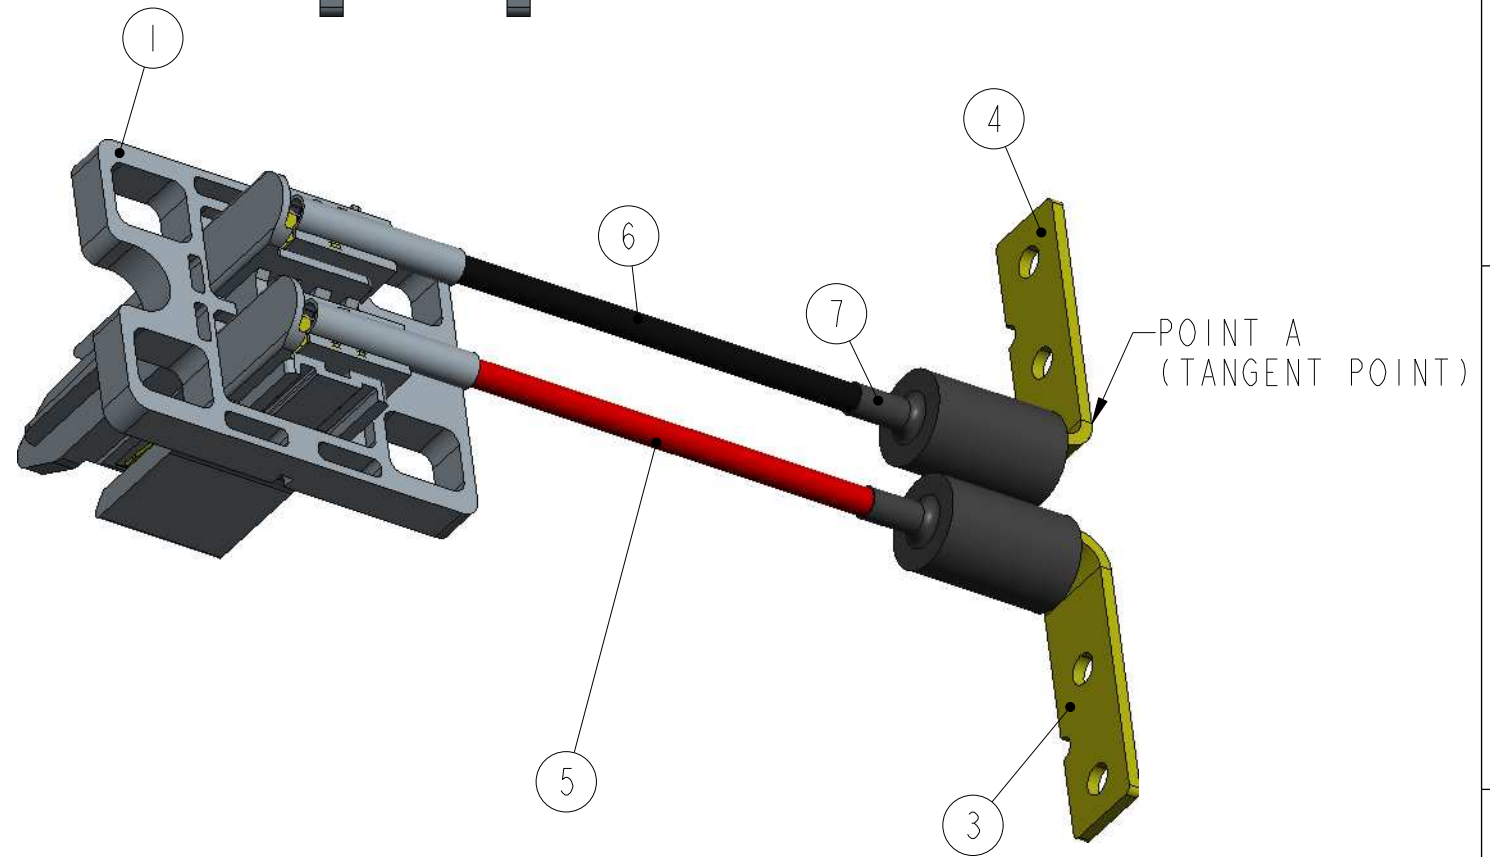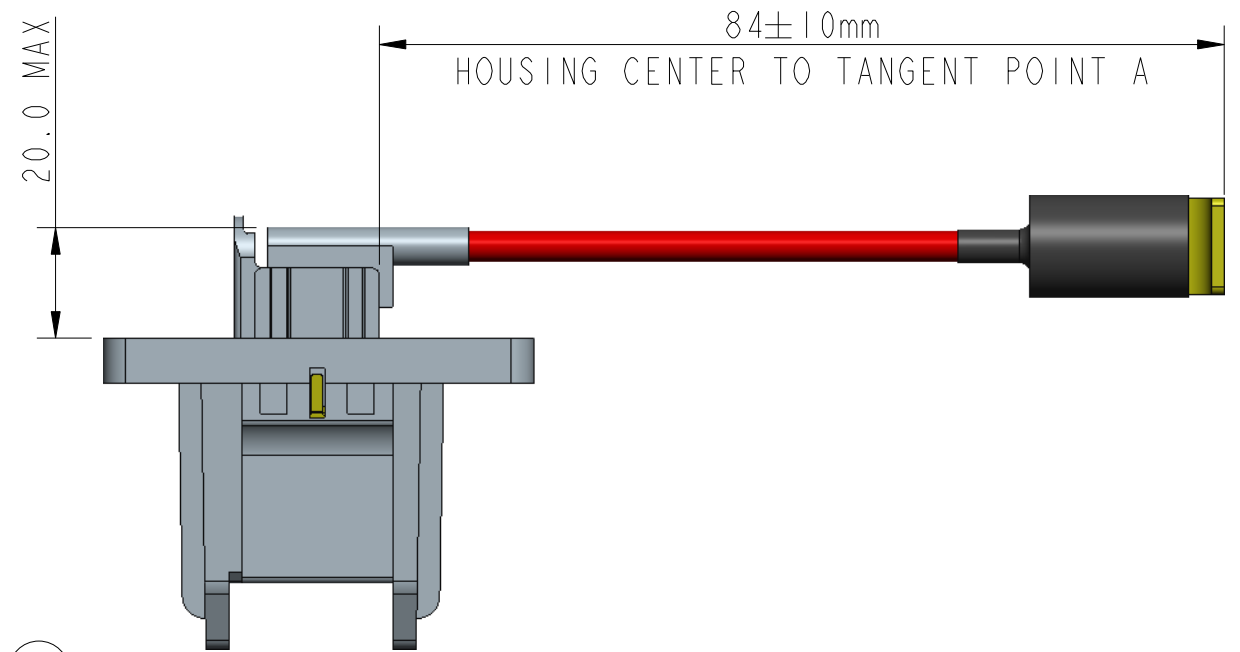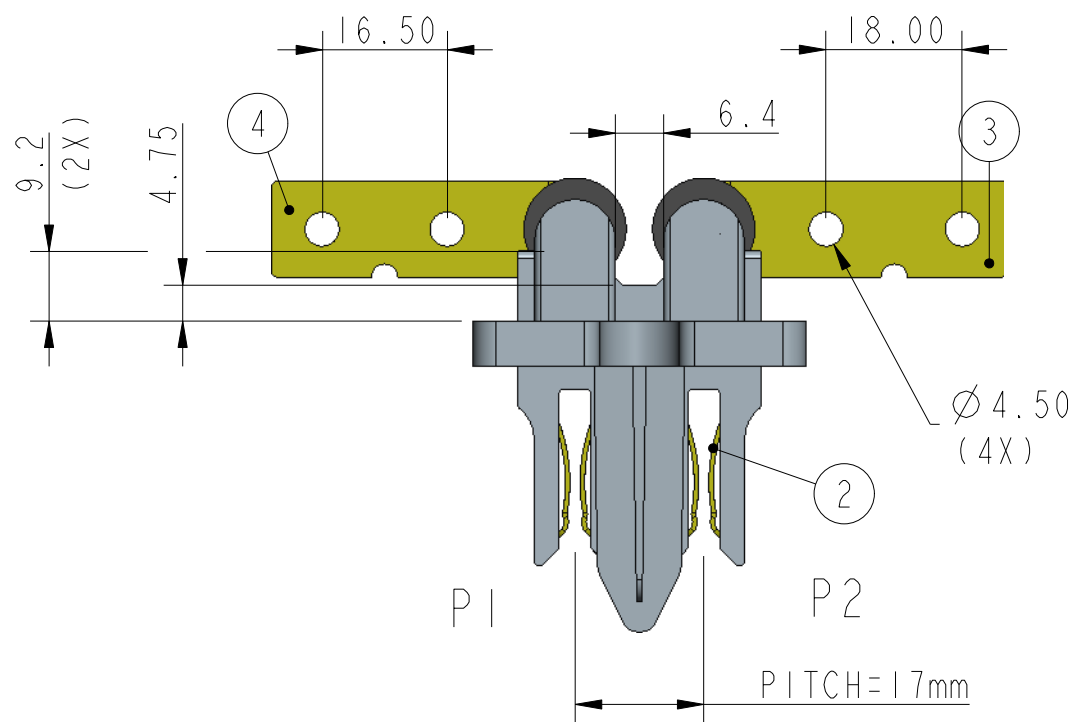

PART NUMBER	CUSTOMER P/N
10124234-120001LF	JBR



ITEM NO.	PART NUMBER	DESCRIPTION	Q'TY
1	10124237-001	HOUSING, THERMOPLASTIC RESIN, UL94V-0	1
2	10124235-12001LF	MATING CONTACT, HIGH CONDUCTIVITY COPPER ALLOY, TIN PLATED.	2
3	10124236-12001LF	FLAT CONTACT, THROUGH HOLE PITCH=18.00mm HIGH CONDUCTIVITY COPPER ALLOY TIN PLATED	1
4	10124236-12002LF	FLAT CONTACT, THROUGH HOLE PITCH=16.50mm HIGH CONDUCTIVITY COPPER ALLOY TIN PLATED	1
5	10124238-12001	FLEXIBLE POWER WIRE, 12 AWG, UL 10070, 105°C, 600V RED INSULATION COLOR, LENGTH=105mm	1
6	10124238-12002	FLEXIBLE POWER WIRE, 12 AWG, UL 10070, 105°C, 600V BLACK INSULATION COLOR, LENGTH=105mm	1
7	10124239-12000	THERMAL SHRINKAGE TUBING, COLOR BLACK, 0.5mm THICKNESS. LENGTH 25mm MIN.	4

NOTES:  
(1) ELECTRICAL RATING: 600V, 20A  
(2) WORKING TEMPERATURE: -20~75°C  
(3) REFERENCE DOCUMENTS:  
PRODUCT SPECIFICATION: FCI-GS-12-1127  
PACKAGEING SPECIFICATION: FCI-GS-14-2295  
(4) RoHS COMPLIANT.

spec ref				dr	Beer Fu	2013-02-01	projection 	MM 	size	A3	scale	1:1						
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Beer Fu	2013-02-01			ecn no	ELX-T-19523								
				chr	Beer Fu	2013-02-01												
				appr	Beer Fu	2013-02-01							product family	rel level	RELEASED			
surface ✓	linear	0.X	±0.30		title	POWER CABLE FINAL ASSEMBLY				dwg no	10124234-120001LF						rev	C
		0.XX	±0.15															
		0.XXX	±0.05															
	angular	0°	±5°	www.fci.com	cat. no.			CUSTOMER					sheet 1 of 1					