



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Monitoring Relays

1-Phase True RMS AC/DC Over or Under Voltage

Type DUB71

CARLO GAVAZZI



- TRMS AC/DC over or under voltage monitoring relays
- Selection of measuring range by DIP-switches
- Measuring ranges from 0.1 to 500 V AC/DC
- Adjustable voltage on relative scale
- Adjustable hysteresis on relative scale
- Adjustable delay function (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 5 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN 50 022
- 35.5 mm DIN-rail housing
- LED indication for relay, alarm and power supply ON

Product Description

DUB71 is a precise TRMS AC/DC over or under voltage (selectable by DIP-switch) monitoring relay. Owing to the built-in latch function, the ON-position of the relay output can be maintained. Inhibit function can be used to avoid relay

operation when not desired (maintenance, transitions). The LED's indicate the state of the alarm and the output relay. 35.5 mm wide housing suitable both for back and front panel mounting.

Ordering Key

DUB 71 C B23 10V

Housing	_____
Function	_____
Type	_____
Item number	_____
Output	_____
Power supply	_____
Range	_____

Type Selection

Mounting	Output	Measuring range	Supply: 24/48 VAC	Supply: 115/230 VAC
DIN-rail	SPDT	0.1 to 10 V AC/DC	DUB 71 C B48 10V	DUB 71 C B23 10V
DIN-rail	SPDT	2 to 500 V AC/DC	DUB 71 C B48 500V	DUB 71 C B23 500V

Input Specifications

Input (voltage level)	Terminals Y1, Y2	
Measuring ranges	Internal resist.	Max. volt.
Direct		
Selectable by DIP-switch		
..10V:		
0.1 to 1 V AC/DC	>120 kΩ	100 V
0.2 to 2 V AC/DC	>120 kΩ	100 V
0.5 to 5 V AC/DC	>120 kΩ	100 V
1 to 10 V AC/DC	>120 kΩ	100 V
Max. voltage for 1 s		200 V
..500V:		
2 to 20 V AC/DC	500 kΩ	350 V
5 to 50 V AC/DC	500 kΩ	350 V
20 to 200 V AC/DC	500 kΩ	600 V
50 to 500 V AC/DC	500 kΩ	600 V
Max. voltage for 1 s		1000 V
Contact input	Terminals Z1, Y1	
Disabled	> 10 kΩ	
Enabled	< 500 Ω	
Latch disable	> 500 ms	

Output Specifications

Output	SPDT relay
Rated insulation voltage	250 VAC
Contact ratings (AgSnO₂)	μ
Resistive loads	
AC 1	5 A @ 250 VAC
DC 12	5 A @ 24 VDC
Small inductive loads	
AC 15	2.5 A @ 250 VAC
DC 13	2.5 A @ 24 VDC
Mechanical life	≥ 30 x 10 ⁶ operations
Electrical life	≥ 10 ⁵ operations (at 5 A, 250 V, cos φ = 1)
Operating frequency	≤ 7200 operations/h
Dielectric strength	
Dielectric voltage	2 kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 μs)



Supply Specifications

Power supply Rated operational voltage through terminals: A1, A2 or A3, A2 B48: B23:	Overvoltage cat. III (IEC 60664, IEC 60038)	Dielectric voltage Supply to input Supply to output Input to output Rated operational power AC	AC supply 4 kV (1.2/50µs) 4 kV (1.2/50µs) 4 kV (1.2/50µs)
	24/48 VAC ± 15% 45 to 65 Hz, insulated 115/230 VAC ± 15% 45 to 65 Hz, insulated		

General Specifications

Power ON delay Reaction time Alarm ON delay Alarm OFF delay	1 s ± 0.5 s or 6 s ± 0.5 s (input signal variation from -20% to +20% or from +20% to -20% of set value) < 100 ms < 100 ms	Housing Dimensions Material Weight Screw terminals Tightening torque	35.5 x 81 x 67.2 mm PA66 or Noryl Approx. 150 g Max. 0.5 Nm acc. to IEC 60947
Accuracy Temperature drift Delay ON alarm Repeatability	(15 min warm-up time) ± 1000 ppm/°C ± 10% on set value ± 50 ms ± 0.5% on full-scale	Product standard Approvals CE Marking EMC Immunity Emissions	EN 60255-6 UL, CSA L.V. Directive 2006/95/EC EMC Directive 2004/108/EC According to EN 60255-26 According to EN 61000-6-2 According to EN 60255-26 According to EN 61000-6-3
Indication for Power supply ON Alarm ON Output relay ON	LED, green LED, red (flashing 2 Hz during delay time) LED, yellow		
Environment Degree of protection Pollution degree Operating temperature Storage temperature	IP 20 3 -20 to 60°C, R.H. < 95% -30 to 80°C, R.H. < 95%		

Mode of Operation

DUB71 monitor both AC and DC over or under voltage.

Example 1

(no connection between terminals Z1, Y1 - latch function disabled)

The relay operates when the measured value exceeds (or drops below) the set level for more than the set delay time.

It releases when the voltage drops below (or exceeds)

the set level (see hysteresis setting), or when power supply is interrupted.

Example 2

(connection between terminals Z1, Y1 - latch function enabled)

The relay operates and latches in operating position when the measured value exceeds (or drops below) the set level for more than the set delay time.

Provided that the voltage has dropped below (or has exceeded) the set point (see hysteresis setting) the relay releases when the interconnection between terminals Z1, Y1 is interrupted, or power supply is interrupted as well.

The yellow LED flashes until the delay time has expired or the measured value has dropped below the set point (see hysteresis setting).

Note

When the inhibit contact is opened, if the input signal is already in alarm position, the delay time needs to elapse before relay activation.

Function/Range/Level and Time Delay Setting

Adjust the input range setting the DIP switches 1 and 2 as shown below.

Select the desired function setting the DIP switches 3 to 6 as shown below.


To access the DIP switches open the grey plastic cover as shown below.

Selection of level and time delay:

Upper knob:
Setting of hysteresis on relative scale: 0 to 30% on set value.

Centre knob:
Voltage level setting on relative scale: 10 to 110% on full scale.

Lower knob:
Setting of delay on alarm time on absolute scale (0.1 to 30 s).

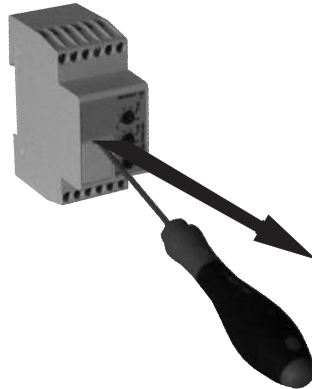

Measuring range			
Model	500 V	10 V	
ON OFF	20 V	1 V	
OFF OFF	50 V	2 V	
ON ON	200 V	5 V	
OFF ON	500 V	10 V	

Relay working mode	
ON:	Normally De-Energized
OFF:	Normally Energized


Power ON delay	
ON:	6 s ± 0.5 s
OFF:	1 s ± 0.5 s

Contact input	
ON:	Latch function enable
OFF:	Inhibit function enable


Monitoring function	
ON:	Over voltage
OFF:	Under voltage

Operation Diagrams


Over voltage - N.D. relay

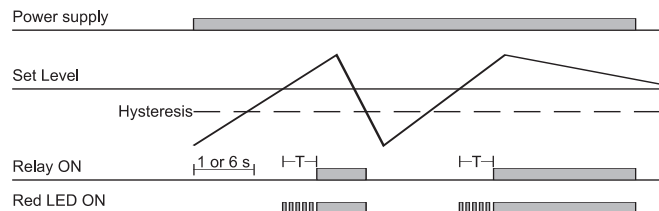


Under voltage - Latch function - N.D. relay

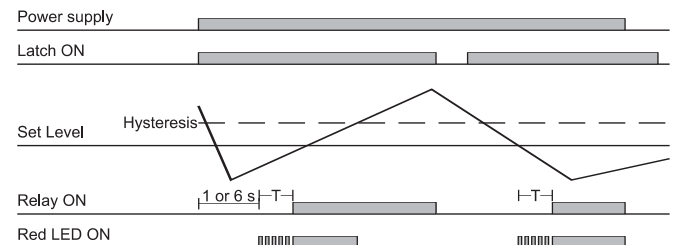

Under voltage - N.D. relay

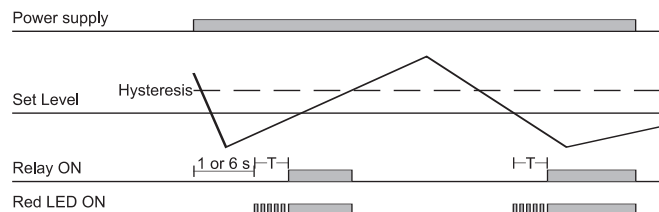


Over voltage - Inhibit function - N.D. relay

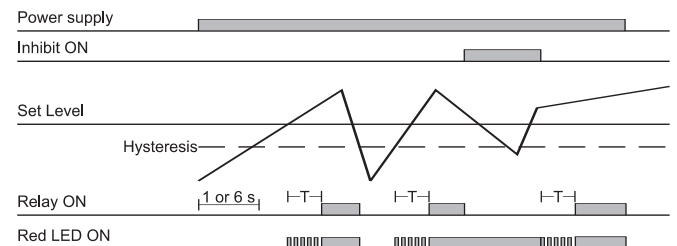


Wiring Diagrams

Example 1

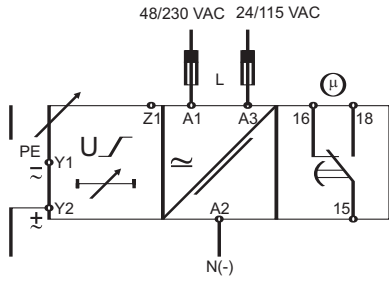

Example 2

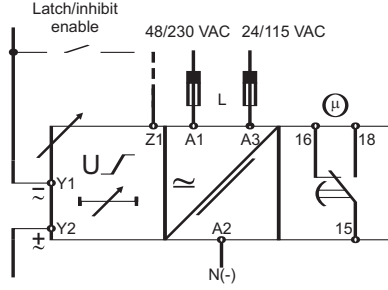

Dimensions

