



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



5V/9V/12V Output USB Auto Detect+USB-PD Type-C Application Report

ACT4527

FEATURES

- Wide input voltage range from 6V to 32V
- Transparent input voltage surge up to 40V
- USB auto detect, support Apple, Samsung and BC 1.2
- Interface for USB-PD Type-C output voltage control 5V/9V/12V
- 2.4A output with Constant current regulation
- 125kHz switching frequency
- Standby input current <1mA
- Good EMC performance
- Under voltage protection at output short
- <6mA average output current at output short
- Output over voltage protection
- Output cord compensation
- Thermal shutdown protection



SPECIFICATION

| DESCRIPTION | CONDITION | MIN | TYP | MAX | UNITS |
|----------------------------|--|------|------|------|-------|
| Output current limit range | | 2400 | 2650 | 2900 | mA |
| Ripple Voltage | V _{in} =12V,output 5V/2.4A | | 46 | | mVpp |
| | V _{in} =12V,output 9V/2.4A | | 27 | | |
| | V _{in} =12V,output 11.6V/2.4A | | 19 | | |
| | V _{in} =24V,output 5V/2.4A | | 59 | | |
| | V _{in} =24V,output 9V/2.4A | | 72 | | |
| | V _{in} =24V,output 12V/2.4A | | 80 | | |
| Efficiency at full load | V _{in} =12V,output 5V/2.4A | | 89.6 | | % |
| | V _{in} =12V,output 9V/2.4A | | 94.9 | | |
| | V _{in} =12V,output 12V/2.4A | | 96.7 | | |
| | V _{in} =24V,output 5V/2.4A | | 87.7 | | |
| | V _{in} =24V,output 9V/2.4A | | 92.4 | | |
| | V _{in} =24V,output 12V/2.4A | | 93.9 | | |
| ENVIRONMENTAL | | | | | |
| ESD | Contact | | 8 | | kV |
| | Through air | | 15 | | kV |

TABLE OF CONTENTS

| | |
|--|----|
| 1. Demo Board Photo | 3 |
| 2. PCB Layout | 3 |
| 3. Schematic..... | 3 |
| 4. Bill of Materials..... | 4 |
| 5. Functional Test..... | 5 |
| 5.1. Output Regulation (on PCB board) | 5 |
| 5.2. Efficiency (Ta=25°C)..... | 6 |
| 5.3. Power Loss | 7 |
| 5.4. Constant Current and Constant Voltage (Ta=25°C)..... | 9 |
| 5.5. Standby Input Current | 12 |
| 5.6. Ripple and Noise | 13 |
| 5.7. Load Dynamic Response | 15 |
| 5.8. Output Voltage Transient | 16 |
| 5.9. Line Dynamic Response(Vin change from 12V to 40V, 0.1V/us)..... | 17 |
| 5.10. Key Components Temperature Test (burning for 2 hours) | 18 |
| 6. EMI TEST..... | 19 |
| 6.1. Output 5V | 19 |
| 6.2. Output=9V | 20 |


1. DEMO BOARD PHOTO

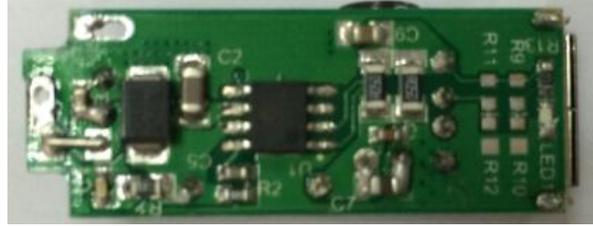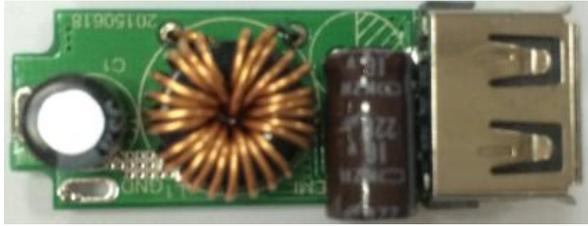


2. PCB LAYOUT

PCB SIZE: 39.4mm*15.0mm


TOP LAYER

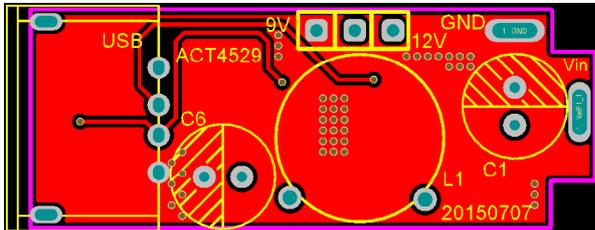

BOTTOM LAYER

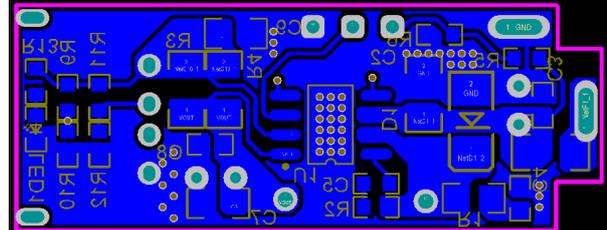

3. SCHEMATIC

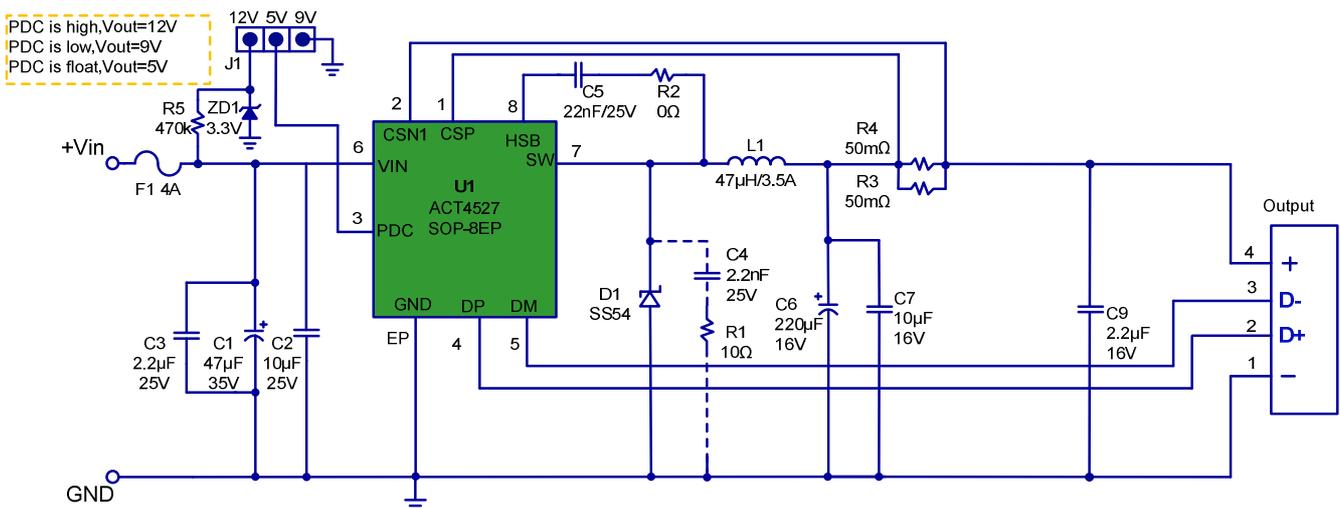

4. BILL OF MATERIALS

| Item | Reference | Description | QTY | Manuf. |
|------|-----------|---|-----|------------|
| 1 | L1 | Choke Coil, Dip, T9*5*4mm, phi=0.6mm, L=47uH | 1 | |
| 2 | D1 | Schottky Diode, SK54BL, 40V/5A, SMB | 1 | Panjit |
| 3 | C1 | Electrolytic capacitor, 47uF/35V, 6.3x8mm | 1 | Koshin |
| 4 | C2 | Ceramic capacitor, 10uF/35V, X7R, 1206 | 1 | Murata/TDK |
| 5 | C3 | Ceramic capacitor, 2.2uF/35V, X7R, 0805 | 1 | Murata/TDK |
| 6 | C4 | Ceramic capacitor, 2.2nF/25V, X7R, 0603(optional) | 1 | Murata/TDK |
| 7 | C5 | Ceramic capacitor, 22nF/25V, X7R, 0603 | 1 | Murata/TDK |
| 8 | C6 | Electrolytic capacitor, 220uF/16V, 7x11.5mm | 1 | Koshin |
| 9 | C7 | Ceramic capacitor, 10uF/16V, X7R, 0805 | 1 | Murata/TDK |
| 10 | C9 | Ceramic capacitor, 2.2uF/16V, X7R, 0603 | 1 | Murata/TDK |
| 11 | F1 | Fuse, 3A, 1206 (Replaced by 0Ω 0805 chip resistor) | 1 | Murata/TDK |
| 12 | R1 | Chip Resistor, 5.1Ω, 1/8W, 5%, 0805(optional) | 1 | Murata/TDK |
| 13 | R2 | Chip Resistor, 0Ω, 1/10W, 5%, 0603 | 1 | Murata/TDK |
| 14 | R3/R4 | Chip Resistor, 50mΩ, 1/4W, 1%, 1206 | 2 | Murata/TDK |
| 15 | R5 | Chip Resistor, 470K, 1/10W, 5%, 0603 | 1 | Murata/TDK |
| 16 | ZD1 | Zener diode, MMSZ5226BS, 3.3V, SOD-323 | 1 | Panjit |
| 17 | U1 | IC, ACT4527, SOP-8-EP | 1 | ACT |
| 18 | USB | USB Rev: A | 1 | |

5. FUNCTIONAL TEST

5.1. Output Regulation (on PCB board)

Vout=5V (With cord compensation)

| VIN | Minimum Output Voltage(V) | Maximum Output Voltage(V) | Load Regulation | Iload |
|-----|---------------------------|---------------------------|-----------------|---------|
| 10V | 5.09 | 5.22 | 2.5% | 0A-2.4A |
| 12V | 5.09 | 5.22 | 2.5% | |
| 16V | 5.09 | 5.22 | 2.5% | |
| 24V | 5.09 | 5.022 | 2.5% | |

Vout=9V(With cord compensation)


| VIN | Minimum Output Voltage(V) | Maximum Output Voltage(V) | Load Regulation | Iload |
|-----|---------------------------|---------------------------|-----------------|---------|
| 10V | 9.21 | 9.34 | 1.4% | 0A-2.4A |
| 12V | 9.21 | 9.21 | 1.4% | |
| 16V | 9.21 | 9.34 | 1.4% | |
| 24V | 9.21 | 9.34 | 1.4% | |

Vout=12V(With cord compensation)


| VIN | Minimum Output Voltage(V) | Maximum Output Voltage(V) | Load Regulation | Iload |
|-----|---------------------------|---------------------------|-----------------|---------|
| 10V | 9.61 | 10.05 | 4.5% | 0A-2.4A |
| 12V | 11.56 | 11.91 | 3.0% | |
| 16V | 12.19 | 12.32 | 1.1% | |
| 24V | 12.19 | 12.32 | 1.1% | |

5.2. Efficiency (Ta=25°C)


| VIN | Vout=5V Efficiency (%) | | | | |
|-----|------------------------|-----------|-----------|-----------|-----------|
| | Io=100mA | Io=1000mA | Io=1500mA | Io=2000mA | Io=2400mA |
| 10V | 88.94 | 93.12 | 92.14 | 91.15 | 90.04 |
| 12V | 86.30 | 92.11 | 91.46 | 90.43 | 89.55 |
| 16V | 83.16 | 90.69 | 90.43 | 89.44 | 88.96 |
| 24V | 75.49 | 88.72 | 88.70 | 88.44 | 87.73 |

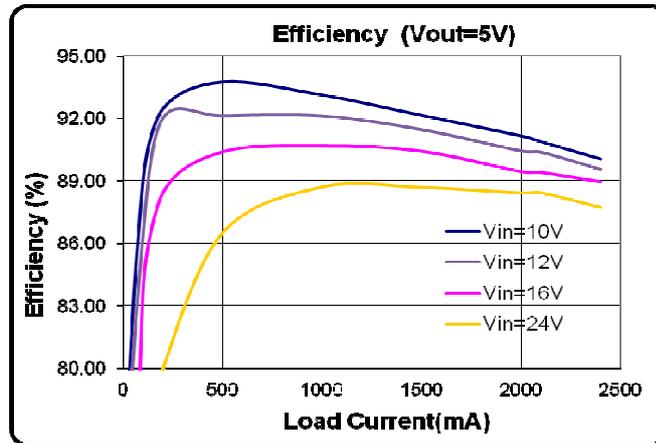

| VIN | Vout=9V Efficiency (%) | | | | |
|-----|------------------------|-----------|-----------|-----------|-----------|
| | Io=100mA | Io=1000mA | Io=1500mA | Io=2000mA | Io=2400mA |
| 10V | 94.72 | 97.48 | 96.83 | 96.25 | 95.39 |
| 12V | 93.70 | 96.68 | 96.15 | 95.43 | 94.91 |
| 16V | 89.93 | 94.88 | 94.55 | 93.89 | 93.56 |
| 24V | 89.23 | 92.80 | 92.89 | 92.68 | 92.39 |

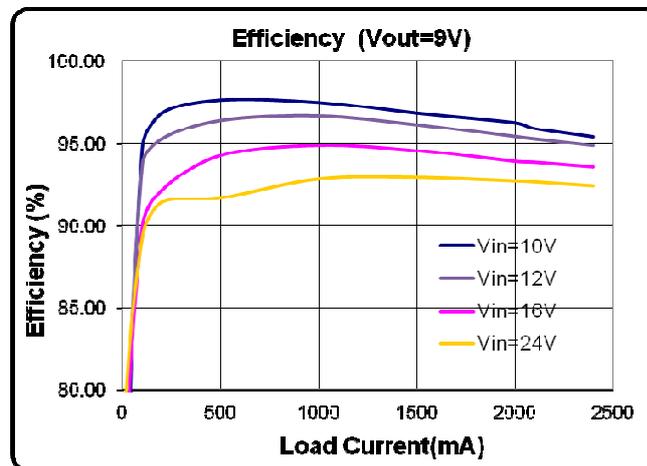


| VIN | Vout=12V Efficiency (%) | | | | |
|-----|-------------------------|-----------|-----------|-----------|-----------|
| | Io=100mA | Io=1000mA | Io=1500mA | Io=2000mA | Io=2400mA |
| 12V | 97.94 | 98.31 | 97.73 | 97.11 | 96.66 |
| 16V | 92.91 | 96.72 | 96.34 | 95.97 | 95.60 |
| 24V | 90.74 | 94.33 | 94.52 | 94.30 | 93.90 |

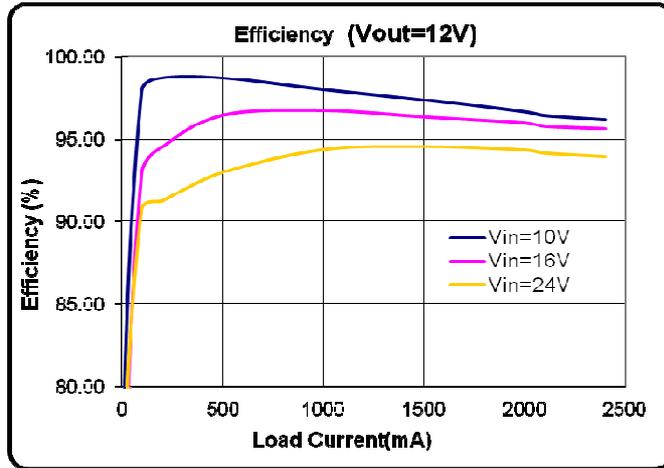


5.3. Power Loss

| Vin | Vout=5V Power loss (W) | | | | | |
|---------|------------------------|----------|-----------|-----------|-----------|-----------|
| | Io=0mA | Io=100mA | Io=1000mA | Io=1500mA | Io=2000mA | Io=2400mA |
| Vin=10V | 0.01 | 0.06 | 0.38 | 0.66 | 1.01 | 1.39 |
| Vin=12V | 0.01 | 0.08 | 0.44 | 0.72 | 1.1 | 1.46 |
| Vin=16V | 0.02 | 0.10 | 0.53 | 0.82 | 1.23 | 1.56 |
| Vin=24V | 0.02 | 0.17 | 0.65 | 0.99 | 1.36 | 1.75 |

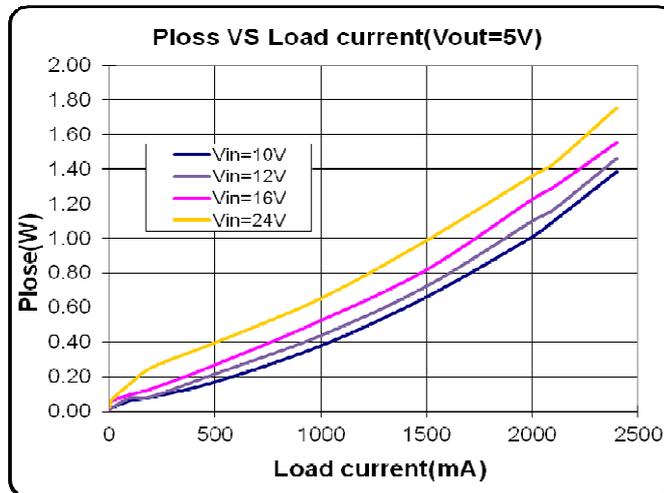


| Vin | Vout=9V Power loss (W) |
|-----|------------------------|
|-----|------------------------|

| | Io=0mA | Io=100mA | Io=1000mA | Io=1500mA | Io=2000mA | Io=2400mA |
|---------|--------|----------|-----------|-----------|-----------|-----------|
| Vin=10V | 0.05 | 0.05 | 0.24 | 0.46 | 0.73 | 1.08 |
| Vin=12V | 0.02 | 0.06 | 0.32 | 0.56 | 0.89 | 1.2 |
| Vin=16V | 0.03 | 0.10 | 0.50 | 0.80 | 1.21 | 1.54 |
| Vin=24V | 0.02 | 0.11 | 0.72 | 1.07 | 1.47 | 1.85 |

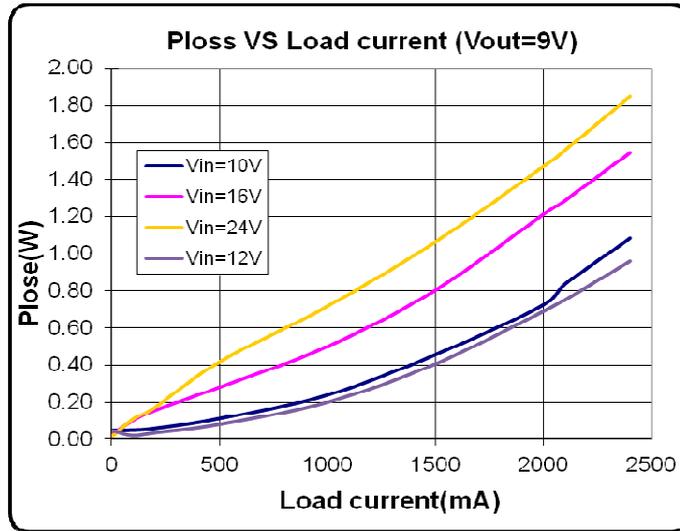


| Vin | Vout=12V Power loss (W) | | | | | |
|---------|-------------------------|----------|-----------|-----------|-----------|-----------|
| | Io=0mA | Io=100mA | Io=1000mA | Io=1500mA | Io=2000mA | Io=2400mA |
| Vin=12V | 0.04 | 0.03 | 0.20 | 0.41 | 0.69 | 0.96 |
| Vin=16V | 0.05 | 0.09 | 0.42 | 0.70 | 1.03 | 1.36 |
| Vin=24V | 0.05 | 0.12 | 0.74 | 1.07 | 1.49 | 1.92 |

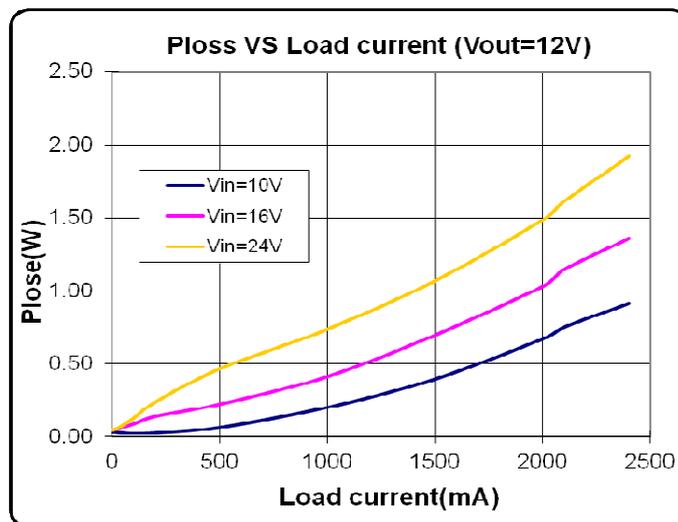


5.4. Constant Current and Constant Voltage (Ta=25°C)


| Vout=5V | Vin=12V | | Vin=16V | | Vin=24V | |
|----------------|----------|----------|----------|-----------|----------|-----------|
| | Vout (V) | Iout(mA) | Vout (V) | Iout (mA) | Vout (V) | Iout (mA) |
| CC Load | 5.09 | 0 | 5.09 | 0 | 5.09 | 0 |
| | 5.12 | 500 | 5.12 | 100 | 5.12 | 100 |
| | 5.14 | 1000 | 5.14 | 1000 | 5.14 | 1000 |
| | 5.17 | 2000 | 5.17 | 2000 | 5.17 | 2000 |
| | 5.22 | 2400 | 5.22 | 2400 | 5.22 | 2400 |
| CV Load | 4.95 | 2537 | 4.85 | 2536 | 4.85 | 2533 |
| | 4.8 | 2537 | 4.75 | 2536 | 4.75 | 2533 |
| | 4.5 | 2537 | 4.5 | 2536 | 4.5 | 2533 |
| | 4 | 2537 | 4 | 2536 | 4 | 2533 |
| | 3.5 | 2537 | 3.5 | 2537 | 3.5 | 2533 |
| | 3 | 2538 | 3 | 2537 | 3 | 2533 |
| | 2.8 | 2538 | 2.5 | 2537 | 2.5 | 2533 |
| | 2.6 | 2212 | 2.4 | 2240 | 2.4 | 2340 |
| | 2.5 | 0 | 2.5 | 0 | 2.5 | 0 |

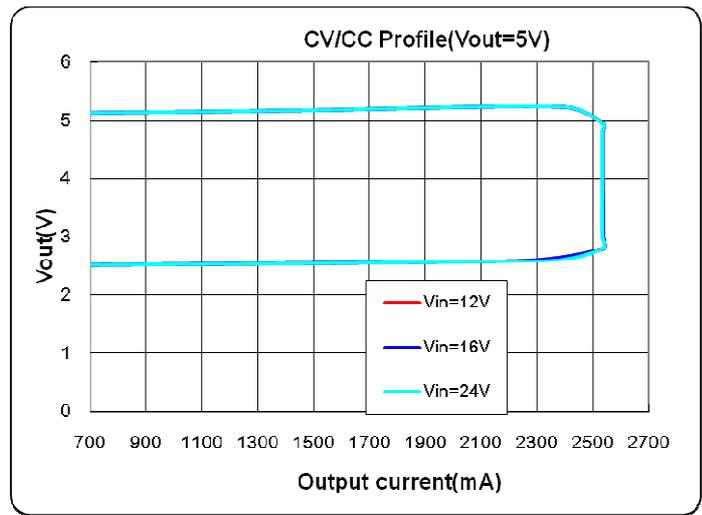

| Vout=9V | Vin=12V | | Vin=16V | | Vin=24V | |
|----------------|----------|----------|----------|-----------|----------|-----------|
| | Vout (V) | Iout(mA) | Vout (V) | Iout (mA) | Vout (V) | Iout (mA) |
| CC Load | 9.21 | 0 | 9.21 | 0 | 9.21 | 0 |
| | 9.24 | 500 | 9.24 | 500 | 9.24 | 500 |
| | 9.27 | 1000 | 9.27 | 1000 | 9.27 | 1000 |
| | 9.3 | 2000 | 9.3 | 2000 | 9.3 | 2000 |
| | 9.34 | 2400 | 9.34 | 2400 | 9.34 | 2400 |
| CV Load | 9 | 2542 | 9 | 2535 | 9 | 2529 |
| | 8 | 2543 | 8 | 2535 | 8 | 2529 |
| | 7 | 2543 | 7 | 2535 | 7 | 2529 |
| | 6 | 2544 | 6 | 2535 | 6 | 2555 |
| | 5 | 2544 | 5 | 2535 | 5 | 2548 |
| | 4 | 2544 | 4 | 2547 | 4 | 2610 |
| | 3 | 2543 | 3 | 2535 | 3 | 2525 |
| | 2.5 | 0 | 2.5 | 0 | 2.5 | 0 |

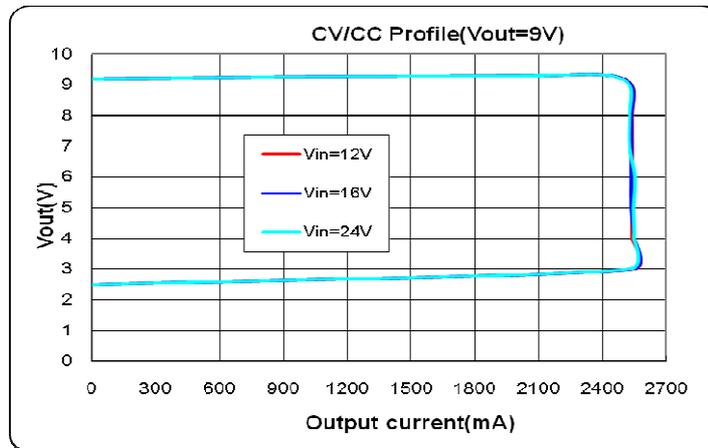

| Vout=12V | Vin=12V | | Vin=16V | | Vin=24V | |
|----------------|----------|----------|----------|-----------|----------|-----------|
| | Vout (V) | Iout(mA) | Vout (V) | Iout (mA) | Vout (V) | Iout (mA) |
| CC Load | 12.19 | 0 | 12.19 | 0 | 12.19 | 0 |
| | 12.22 | 500 | 12.22 | 500 | 12.22 | 500 |
| | 12.24 | 1000 | 12.24 | 1000 | 12.24 | 1000 |
| | 12.3 | 1500 | 12.3 | 1500 | 12.3 | 1500 |
| | 12.32 | 2400 | 12.32 | 2400 | 12.32 | 2400 |
| CV Load | 11 | 2538 | 11.5 | 2533 | 12 | 2530 |
| | 10 | 2538 | 10 | 2533 | 10 | 2530 |
| | 9 | 2539 | 9 | 2534 | 9 | 2530 |
| | 8 | 2539 | 8 | 2534 | 8 | 2530 |
| | 7 | 2540 | 7 | 2534 | 7 | 2545 |
| | 6 | 2541 | 6 | 2535 | 6 | 2545 |
| | 5 | 2540 | 5 | 2557 | 5 | 2540 |
| | 4 | 2541 | 4 | 2625 | 4 | 2642 |
| | 3 | 2540 | 3 | 2530 | 3 | 2521 |
| | 2.5 | 0 | 2.5 | 0 | 2.5 | 0 |

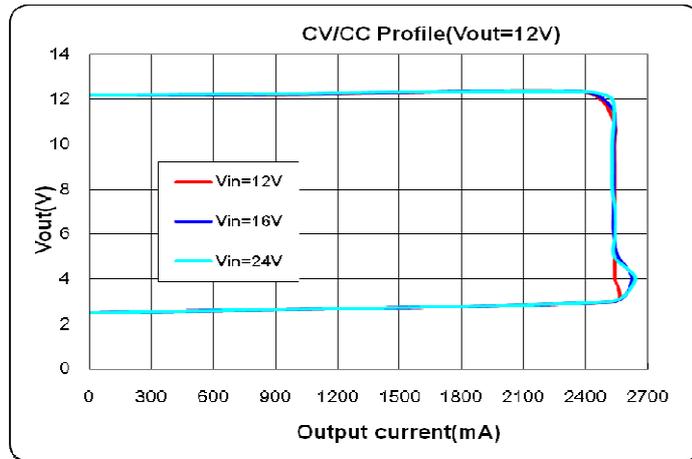

5.5. Standby Input Current

Vout=5V

| Test Conditions | Input Current (mA) | Power Loss at No Load (mW) |
|-----------------|--------------------|----------------------------|
| Vin=10V | 0.75 | 7.5 |
| Vin=12V | 0.7 | 8.4 |
| Vin=16V | 0.84 | 13.4 |
| Vin=24V | 0.69 | 16.6 |

Vout=9V

| Test Conditions | Input Current (mA) | Power Loss at No Load (mW) |
|-----------------|--------------------|----------------------------|
| Vin=10V | 3.94 | 39.4 |
| Vin=12V | 1.69 | 20.3 |
| Vin=16V | 1.35 | 21.6 |
| Vin=24V | 1.06 | 25.4 |


Vout=12V

| Test Conditions | Input Current (mA) | Power Loss at No Load (mW) |
|-----------------|--------------------|----------------------------|
| Vin=12V | 2.13 | 25.6 |
| Vin=16V | 2.13 | 34.1 |
| Vin=24V | 1.56 | 37.4 |


5.6. Ripple and Noise

CH1:Vsw, CH2:Vout2


Vin=10V Vout=5V Iout=0A

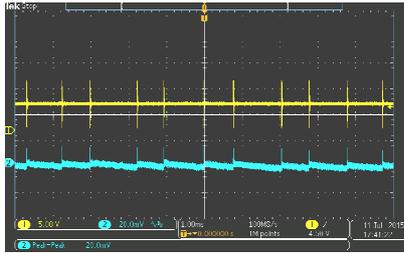


Vin=10V Vout=5V Iout=1A

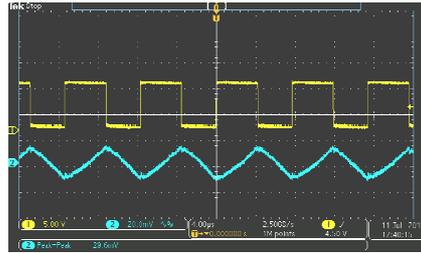


Vin=10V Vout=5V Iout=2.4A

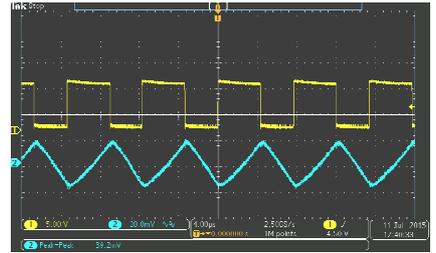


Vin=24V Vout=5V Iout=0A

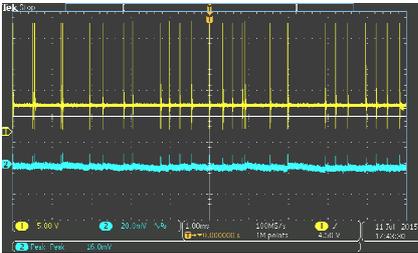


Vin=24V Vout=5V Iout=1A

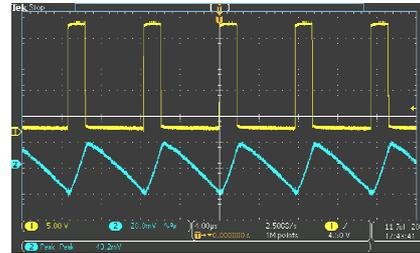


Vin=24V Vout=5V Iout=2.4A

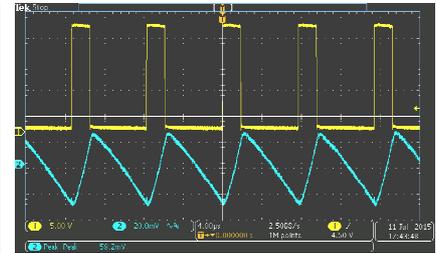


Vin=10V Vout=9V Iout=0A

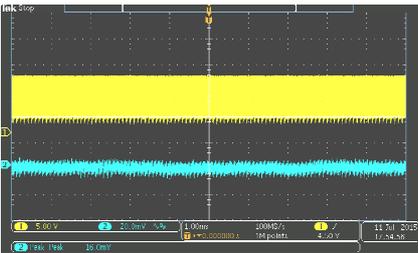


Vin=10V Vout=9V Iout=1A

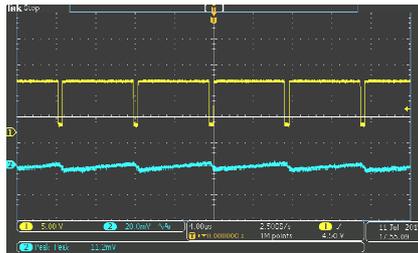


Vin=10V Vout=9V Iout=2.4A

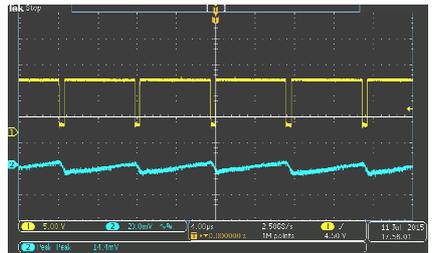


Vin=24V Vout=9V Iout=0A

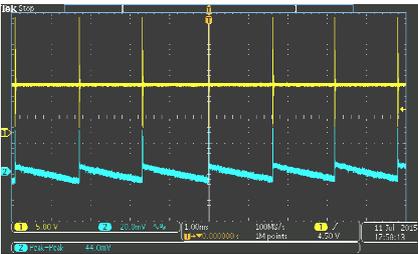


Vin=24V Vout=9V Iout=1A

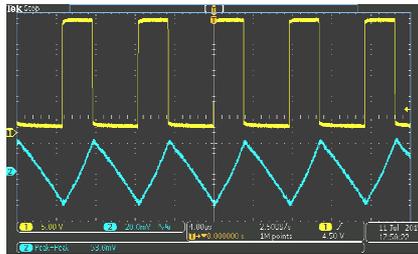


Vin=24V Vout=9V Iout=2.4A

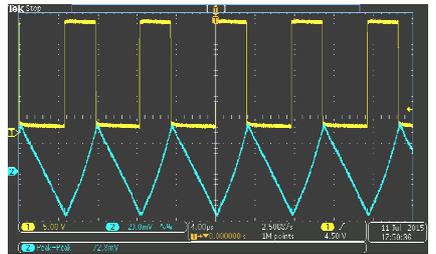


Vin=12V Vout=12V Iout=0A

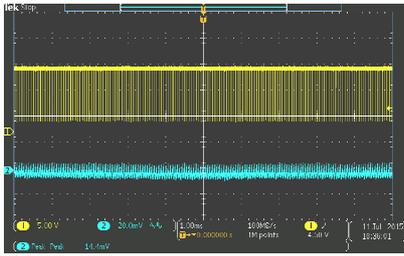


Vin=12V Vout=12V Iout=1A

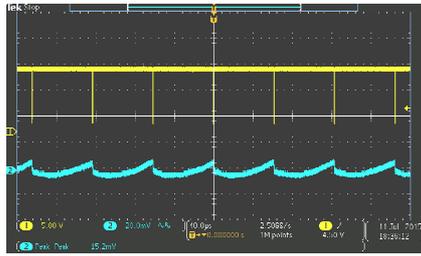


Vin=12V Vout=12V Iout=2.4A

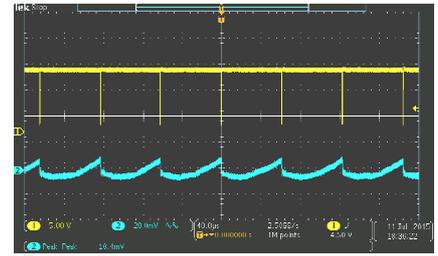


Vin=24V Vout=12V Iout=0A

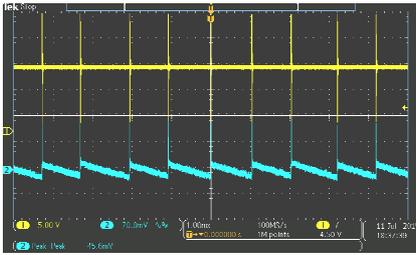

Vin=24V Vout=12V Iout=1A

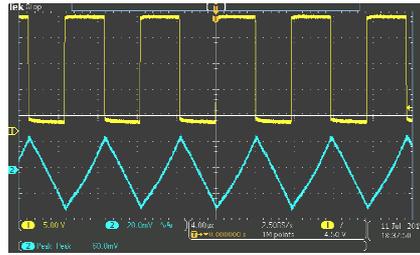

Vin=24V Vout=12V Iout=2.4A

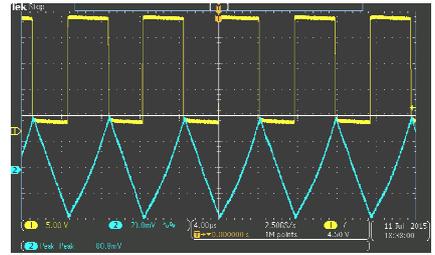

Ripple & noise are measured by using 20MHz bandwidth limited oscilloscope


| Test Conditions | Vout=5V | | | Vout=9V | | | Vout=12V | | |
|-----------------|---------|---------|-----------|---------|---------|-----------|----------|---------|-----------|
| | Iout=0A | Iout=1A | Iout=2.4A | Iout=0A | Iout=1A | Iout=2.4A | Iout=0A | Iout=1A | Iout=2.4A |
| Vin=10V | 20 | 30 | 39 | 16 | 11 | 14 | 13 | 14 | 17 |
| Vin=12V | 25 | 34 | 46 | 15 | 21 | 27 | 11 | 15 | 18 |
| Vin=16V | 34 | 38 | 52 | 22 | 38 | 51 | 21 | 30 | 38 |
| Vin=24V | 36 | 43 | 59 | 44 | 54 | 73 | 46 | 60 | 80 |

5.7. Load Dynamic Response


CH2:Vout ripple, CH4:Iout

Vout=5V


Vin=24V, load step 0A-0.5A-0A

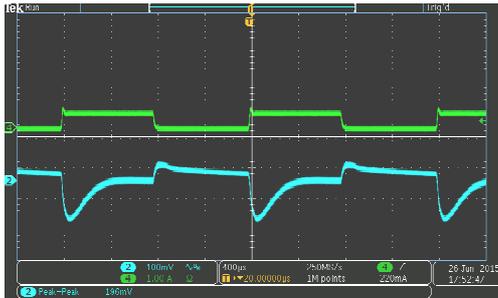


Vin=24V, load step 0.5A-1A-0.5A

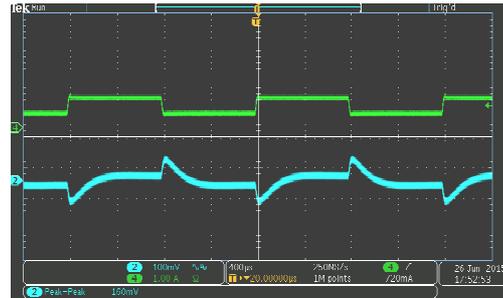

Vin=24V, load step 1A-1.5A-1A

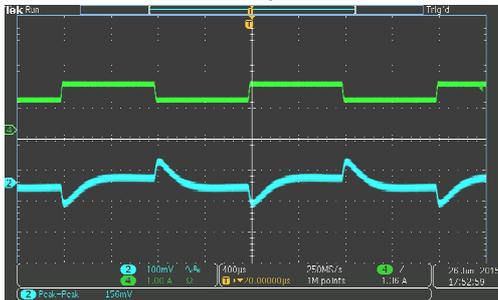


Vin=24V, load step 1.5A-2.4A-1.5A

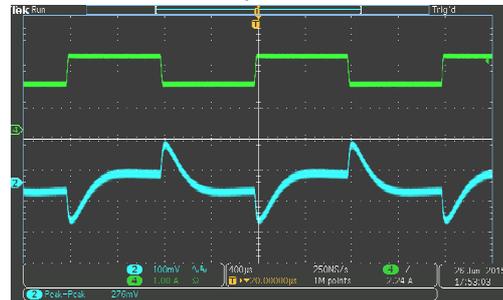


Vout=9V


Vin=24V, load step 0A-0.5A-0A

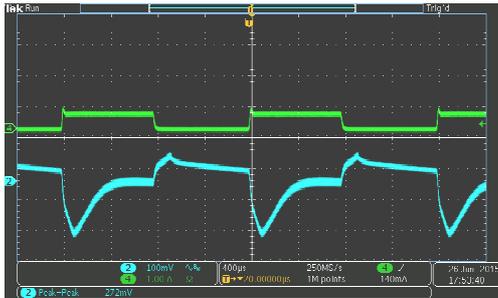


Vin=24V, load step 0.5A-1A-0.5A

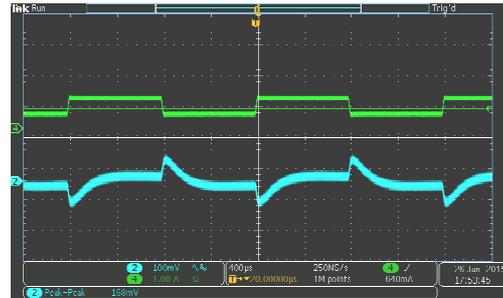

Vin=24V, load step 1A-1.5A-1A

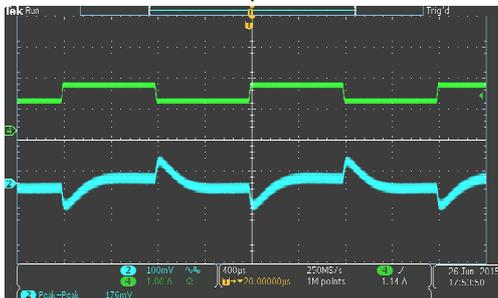


Vin=24V, load step 1.5A-2.4A-1.5A

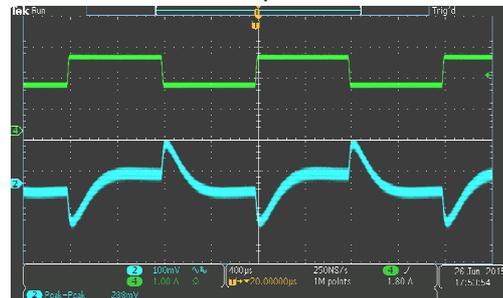


Vout=12V


Vin=24V, load step 0A-0.5A -0A

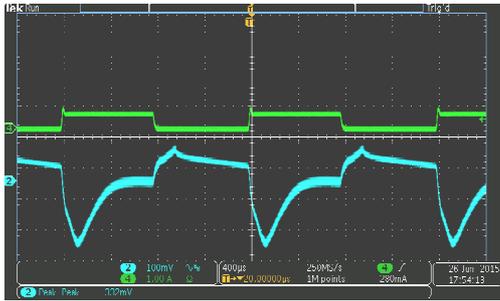


Vin=24V, load step 0.5A-1A-0.5A

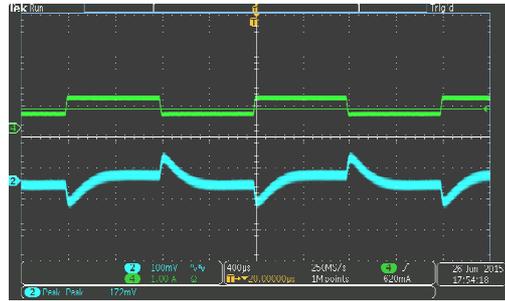

Vin=24V, load step 1A-1.5A-1A

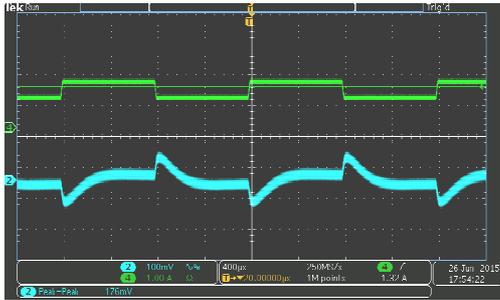


Vin=24V, load step 1.5A-2.4A-1.5A

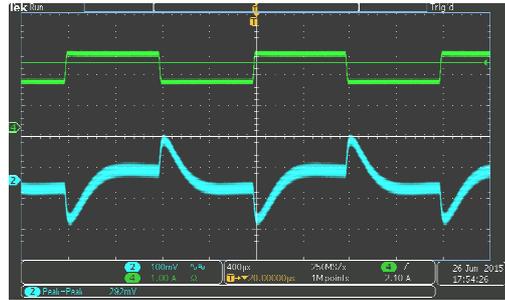


5.8. Output Voltage Transient

CH2:Vout,CH3:Vsw,CH4:IL


Vin=12V,Iout=0A,Vout 5V—>9V

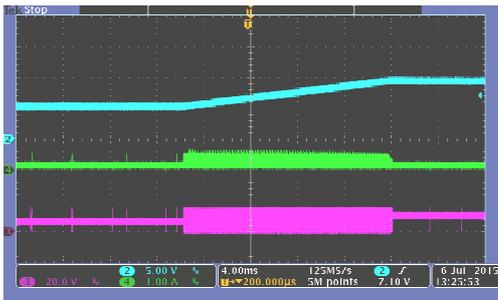


Vin=12V,Iout=0A,Vout 9V—>5V

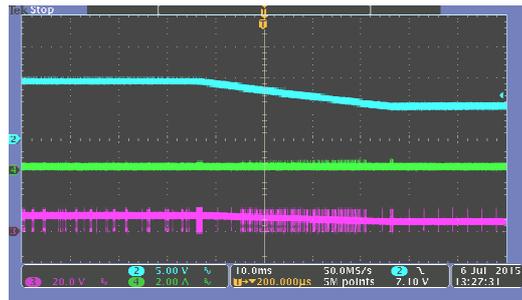


Vin=12V,Iout=0A,Vout 9V—>12V

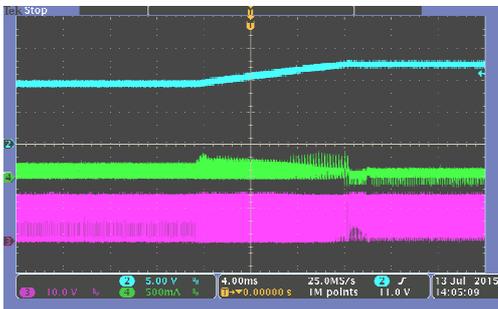


Vin=12V,Iout=0A,Vout 12V—>5V

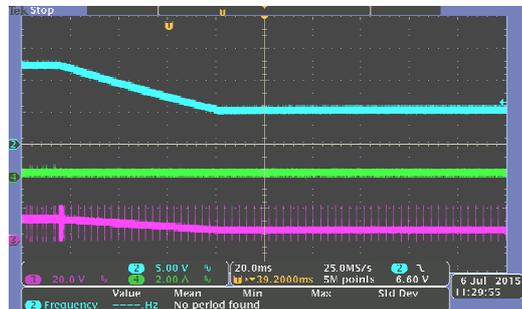

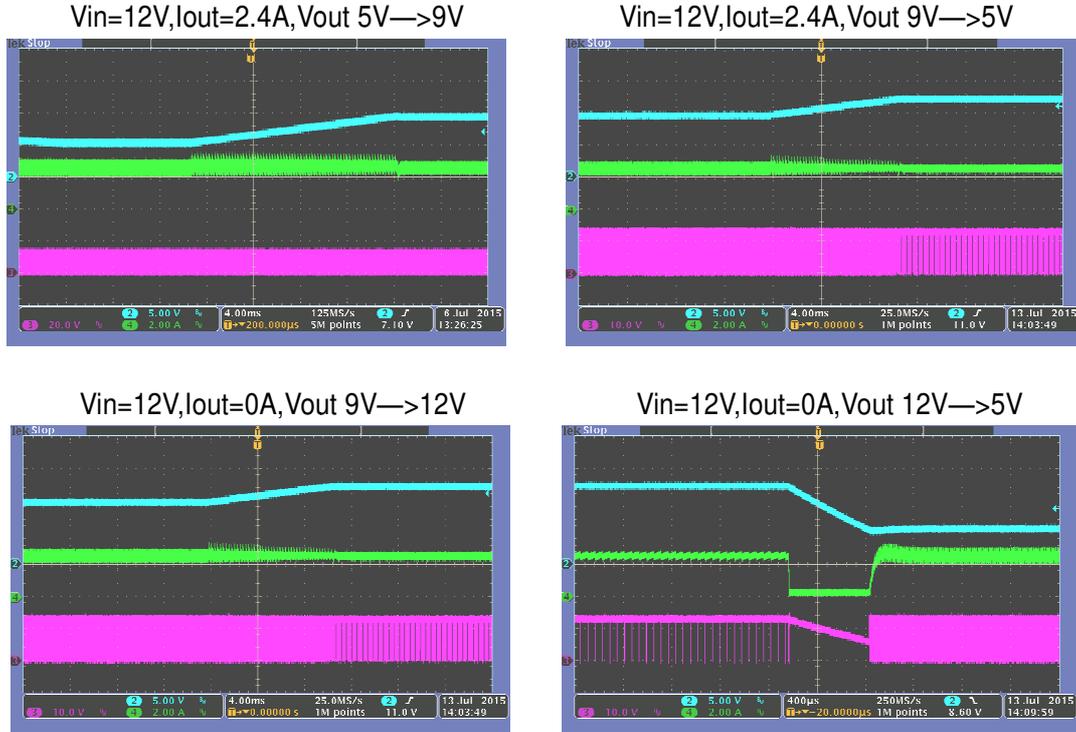

5.9. Line Dynamic Response (Vin change from 12V to 40V, 0.1V/us)

CH1: Vin, CH2: Vout ripple, output 5V/2.4A

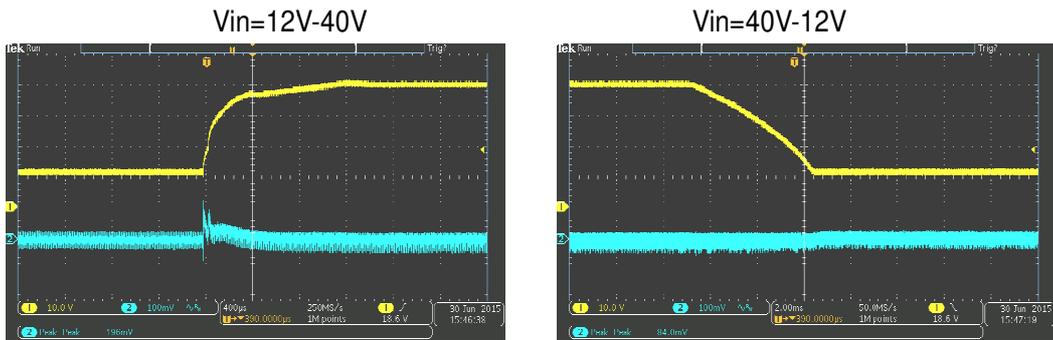

5.10.Key Components Temperature Test (burning for 2 hours)

Vout=5V

| Vin/lout | Ambient (°C) | PCB (°C) | IC (°C) | Schottky (°C) | Inductor (°C) |
|----------|--------------|----------|---------|---------------|---------------|
| 12V/2.4A | 33 | 92 | 95 | 97 | 95 |
| 16V/2.4A | 33 | 97 | 99 | 104 | 101 |
| 24V/2.4A | 33 | 101 | 104 | 109 | 106 |

Vout=9V

| Vin/lout | Ambient (°C) | PCB (°C) | IC (°C) | Schottky (°C) | Inductor (°C) |
|----------|--------------|----------|---------|---------------|---------------|
| 12V/2A | 33 | 74 | 75 | 73 | 72 |
| 16V/2A | 33 | 84 | 85 | 88 | 83 |
| 24V/2A | 33 | 92 | 93 | 96 | 91 |

Vout=12V


| Vin/lout | Ambient (°C) | PCB (°C) | IC (°C) | Schottky (°C) | Inductor (°C) |
|----------|--------------|----------|---------|---------------|---------------|
| 12V/2A | 37 | 72 | 75 | 66 | 72 |
| 16V/2A | 38 | 81 | 85 | 78 | 83 |
| 24V/2A | 39 | 92 | 96 | 90 | 95 |



6. EMI TEST

6.1. Output 5V


Vin=12V Output 5V2.4A Horizontal

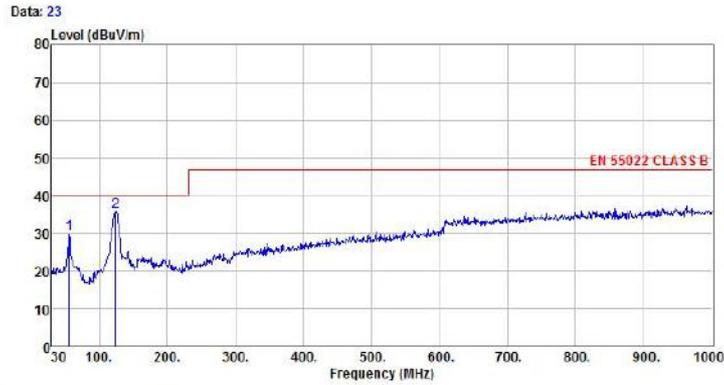

Site : chamber
 Condition : EN 55022 CLASS B 3m VULB9160 HORIZONTAL
 EUT :
 Model Name : 5
 Temp/Humi : 25°C / 53 %
 Power Rating: AC 230V/50Hz
 Mode :
 Memo :

| | Freq | ReadAntenna Level Factor | Cable Preamp Loss Factor | Limit Level | Over Limit Remark | Factor | | | | | |
|---|-------|--------------------------|--------------------------|-------------|-------------------|--------|-------|--------|-------|-------|-------|
| | MHz | dBuV | dB/m | dB | dBuV/m | dB/m | | | | | |
| 1 | 55.22 | 16.32 | 12.40 | 1.00 | 0.00 | 29.72 | 40.00 | -10.28 | Peak | 13.40 | |
| 2 | pp | 124.09 | 21.86 | 12.27 | 1.51 | 0.00 | 35.64 | 40.00 | -4.36 | Peak | 13.78 |

Vin=12V Output 5V2.4A Vertical

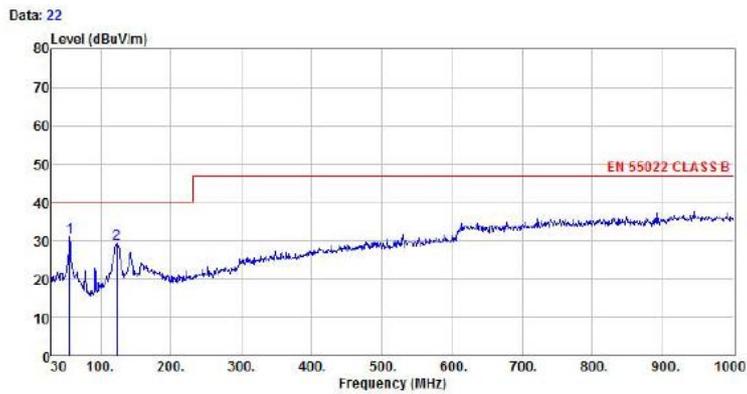


Site : chamber
 Condition : EN 55022 CLASS B 3m VULB9160 VERTICAL
 EUT :
 Model Name : 5
 Temp/Humi : 25°C / 53 %
 Power Rating: AC 230V/50Hz
 Mode :
 Memo :

| | Freq | ReadAntenna Level Factor | Cable Preamp Loss Factor | Limit Level | Over Limit Remark | Factor | | | | | |
|---|------|--------------------------|--------------------------|-------------|-------------------|--------|-------|-------|--------|------|-------|
| | MHz | dBuV | dB/m | dB | dBuV/m | dB/m | | | | | |
| 1 | pp | 55.22 | 17.71 | 12.40 | 1.00 | 0.00 | 31.11 | 40.00 | -8.89 | Peak | 13.40 |
| 2 | | 123.12 | 15.33 | 12.27 | 1.50 | 0.00 | 29.10 | 40.00 | -10.90 | Peak | 13.77 |

6.2. Output=9V


Vin=12V Output 9V2.4A Horizontal

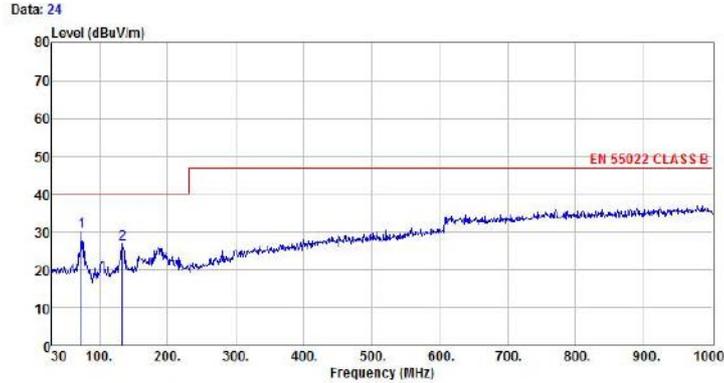

Site : chamber
 Condition : EN 55022 CLASS B 3m VULB9160 HORIZONTAL
 EUT :
 Model Name : 7
 Temp/Humi : 25°C / 53 %
 Power Rating: AC 230V/50Hz
 Mode :
 Memo :

| | ReadAntenna | Cable | Preamp | Limit | Over | | | | | |
|------|-------------|--------|--------|-------|--------|--------|--------|--------|------|-------|
| Freq | Level | Factor | Loss | Level | Line | Limit | Remark | Factor | | |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | dB/m | | |
| 1 pp | 73.65 | 19.13 | 9.87 | 1.12 | 0.00 | 30.12 | 40.00 | -9.88 | Peak | 10.99 |
| 2 | 133.79 | 12.29 | 12.92 | 1.61 | 0.00 | 26.82 | 40.00 | -13.18 | Peak | 14.53 |

Vin=12V Output 9V2.4A Vertical

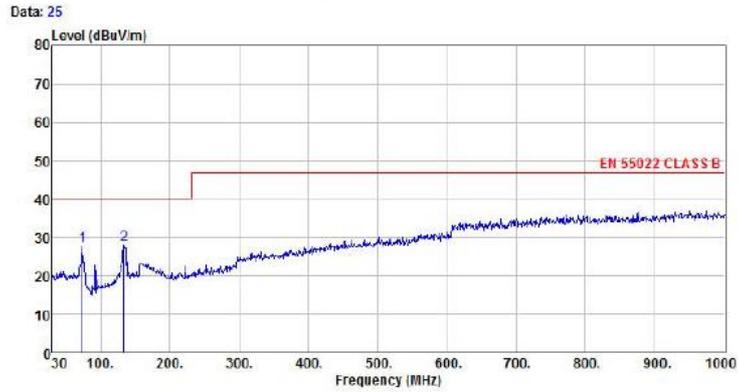

Site : chamber
 Condition : EN 55022 CLASS B 3m VULB9160 VERTICAL
 EUT :
 Model Name : 7
 Temp/Humi : 25°C / 53 %
 Power Rating: AC 230V/50Hz
 Mode :
 Memo :

| | ReadAntenna | Cable | Preamp | Limit | Over | | | | | |
|------|-------------|--------|--------|-------|--------|--------|--------|--------|------|-------|
| Freq | Level | Factor | Loss | Level | Line | Limit | Remark | Factor | | |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | dB/m | | |
| 1 | 73.65 | 16.69 | 9.87 | 1.12 | 0.00 | 27.68 | 40.00 | -12.32 | Peak | 10.99 |
| 2 pp | 133.79 | 13.50 | 12.92 | 1.61 | 0.00 | 28.03 | 40.00 | -11.97 | Peak | 14.53 |