

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










# **DATASHEET**

# SMD • B EAST3215BA0



#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- ESD Protection.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm)

## **Description**

- The SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

## **Applications**

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- · General use.



# **Device Selection Guide**

Chip Materials	Emitted Color	Resin Color	
InGaN	Blue	Water Clear	

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	l <sub>F</sub>	25	mA
eak Forward Current (Duty 1/10 @1KHz)	I <sub>FP</sub>	100	mA
Power Dissipation	Pd	95	mW
Electrostatic Discharge	ESD <sub>HBM</sub>	2000	V
Operating Temperature	$T_{opr}$	-40 ~ +85	$^{\circ}$ C
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}$
Soldering Temperature	Tsol	Reflow Soldering : 260 $^\circ\!$	



**Electro-Optical Characteristics (Ta=25℃)** 

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	28.5		72.0	mcd	_
Viewing Angle	2θ <sub>1/2</sub>		130		deg	_
Peak Wavelength	λр		468		nm	_
Dominant Wavelength	λd	464.5		476.5	nm	¯ I <sub>F</sub> =20mA _
Spectrum Radiation Bandwidth	Δλ		25		nm	
Forward Voltage	$V_{F}$	2.7	3.3	3.7	V	

#### Note:

<sup>1.</sup>Tolerance of Luminous Intensity: ±11%

<sup>2.</sup>Tolerance of Dominant Wavelength ±1nm



**Bin Range of Luminous Intensity** 

Bin Code	Min.	Max.	Unit	Condition
N1	28.5	36.0		
N2	36.0	45.0		I <sub>F</sub> =20mA
P1	45.0	57.0	mcd	
P2	57.0	72.0		

Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
A9	464.5	467.5		
A10	467.5	470.5		J 00m A
A11	470.5	473.5	mm nm	I <sub>F</sub> =20mA
A12	473.5	476.5		


#### Note:


<sup>1.</sup> Tolerance of Luminous Intensity: ±11%


<sup>2.</sup> Tolerance of Dominant Wavelength ±1nm





## **Typical Electro-Optical Characteristics Curves**



















# **Package Dimension**









Side








Suggested pad dimension is just for reference only. Please modify the pad dimension based on individual need.

Note: Tolerances unless mentioned ±0.1mm. Unit = mm




# **Label Explanation**



- · CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- · REF: Forward Voltage Rank
- · LOT No: Lot Number


## **Reel Dimensions**

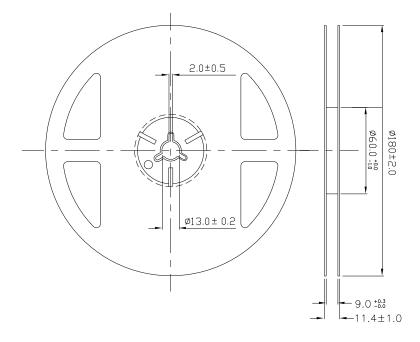

Note: The tolerances unless mentioned is  $\pm 0.1 \text{mm}$ , Unit = mm




# Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

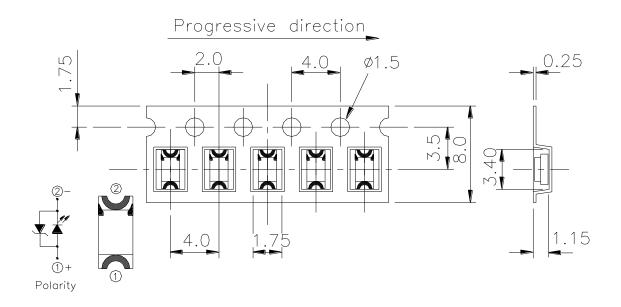

Note: The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## **Moisture Resistant Packaging**

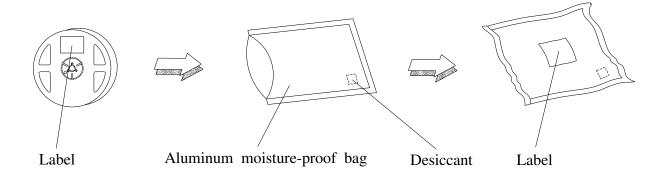



### **Precautions For Use**

#### 1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

#### 2. Storage


- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under  $30^{\circ}$ C or less and 60% RH or less.

If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment:  $60\pm5^{\circ}$ C for 24 hours.

### 3. Soldering Condition

3.1 Pb-free solder temperature profile

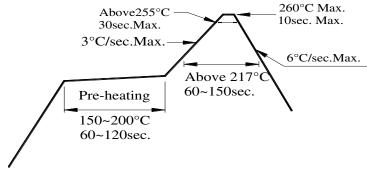


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

## 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.



DATASHEET SMD • B EAST3215BA0



# **Application Restrictions**

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight Americas before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.