



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Photomicrosensor (Actuator Mounted) EE-SA104


⚠ Be sure to read *Precautions* on page 25.

Dimensions

Note: All units are in millimeters unless otherwise indicated.

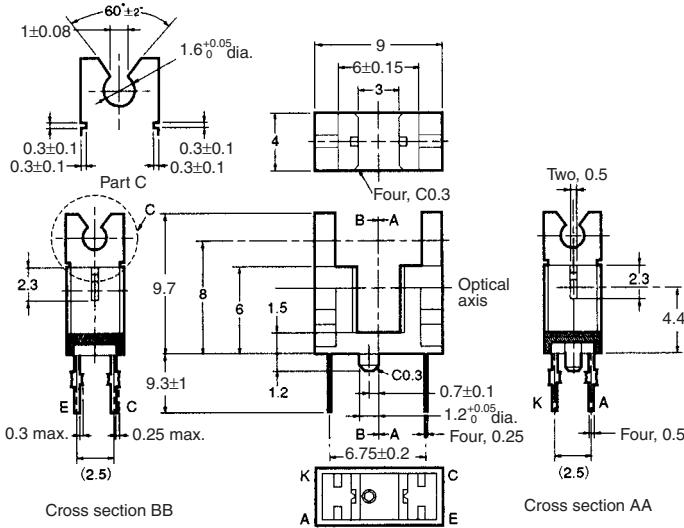

Internal Circuit



Terminal No.	Name
A	Anode
K	Cathode
C	Collector
E	Emitter

Unless otherwise specified, the tolerances are as shown below.

Dimensions	Tolerance
3 mm max.	±0.3
3 < mm ≤ 6	±0.375
6 < mm ≤ 10	±0.45
10 < mm ≤ 18	±0.55
18 < mm ≤ 30	±0.65

Features

- An actuator can be attached.
- PCB mounting type.
- High resolution with a 0.5-mm-wide aperture.

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Item	Symbol	Rated value
Emitter	Forward current	I_F	50 mA (see note 1)
	Pulse forward current	I_{FP}	1 A (see note 2)
	Reverse voltage	V_R	4 V
Detector	Collector-Emitter voltage	V_{CEO}	30 V
	Emitter-Collector voltage	V_{ECO}	---
	Collector current	I_C	20 mA
	Collector dissipation	P_C	100 mW (see note 1)
	Ambient temperature	Operating	T_{opr} -25°C to 85°C
Ambient temperature	Storage	T_{stg}	-30°C to 100°C
	Soldering temperature	T_{sol}	260°C (see note 3)


- Note: 1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C .
 2. The pulse width is 10 μs maximum with a frequency of 100 Hz.
 3. Complete soldering within 10 seconds.

Electrical and Optical Characteristics ($T_a = 25^\circ\text{C}$)


Item		Symbol	Value	Condition
Emitter	Forward voltage	V_F	1.2 V typ., 1.5 V max.	$I_F = 30 \text{ mA}$
	Reverse current	I_R	0.01 μA typ., 10 μA max.	$V_R = 4 \text{ V}$
	Peak emission wavelength	λ_P	940 nm typ.	$I_F = 20 \text{ mA}$
Detector	Light current	I_L	0.5 mA min., 14 mA max.	$I_F = 20 \text{ mA}, V_{CE} = 10 \text{ V}$
	Dark current	I_D	2 nA typ., 200 nA max.	$V_{CE} = 10 \text{ V}, 0 \text{ lx}$
	Leakage current	I_{LEAK}	---	---
	Collector-Emitter saturated voltage	$V_{CE} (\text{sat})$	0.1 V typ., 0.4 V max.	$I_F = 20 \text{ mA}, I_L = 0.1 \text{ mA}$
	Peak spectral sensitivity wavelength	λ_P	850 nm typ.	$V_{CE} = 10 \text{ V}$
Rising time		t_r	4 μs typ.	$V_{CC} = 5 \text{ V}, R_L = 100 \Omega, I_L = 5 \text{ mA}$
Falling time		t_f	4 μs typ.	$V_{CC} = 5 \text{ V}, R_L = 100 \Omega, I_L = 5 \text{ mA}$

■ Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

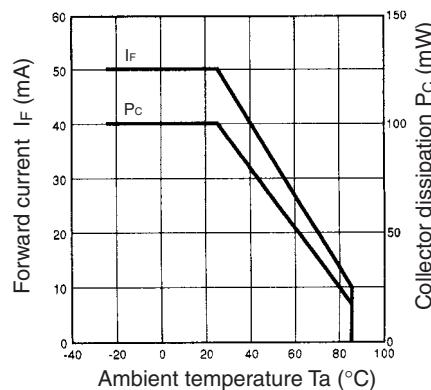


Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

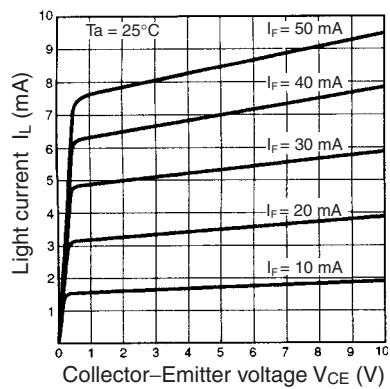


Response Time vs. Load Resistance Characteristics (Typical)

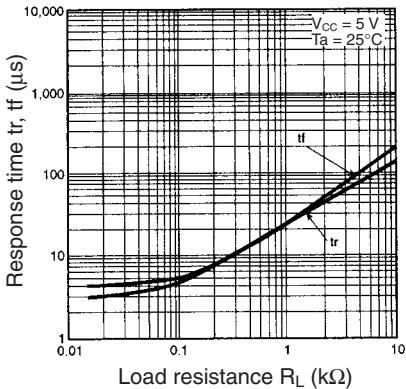


Response Time Measurement Circuit

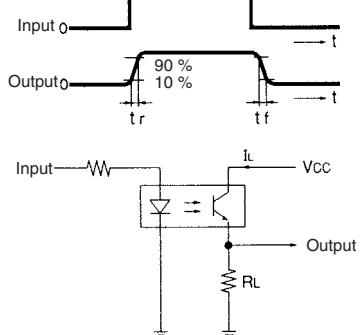


Forward Current vs. Forward Voltage Characteristics (Typical)

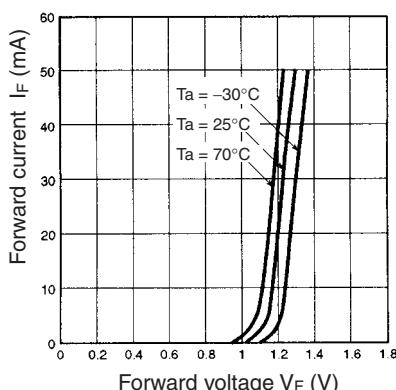


Light Current vs. Forward Current Characteristics (Typical)

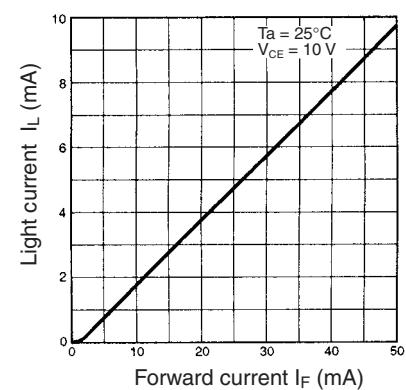


Dark Current vs. Ambient Temperature Characteristics (Typical)

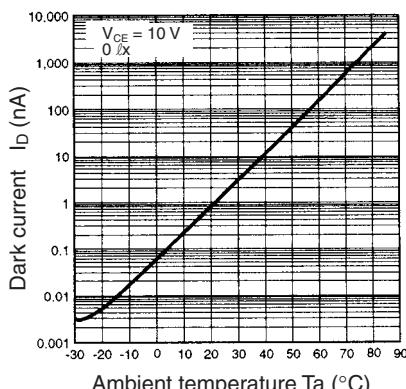


Relative Light Current vs. Ambient Temperature Characteristics (Typical)

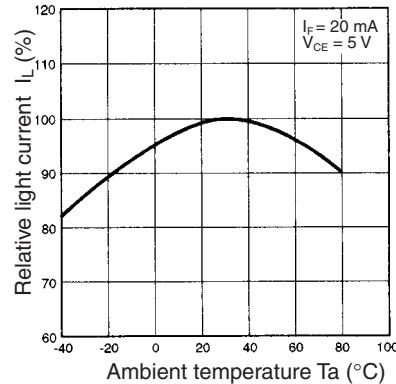

Sensing Position Characteristics (Typical)

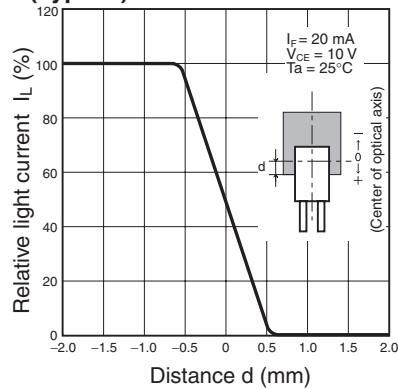

Actuator Dimensions

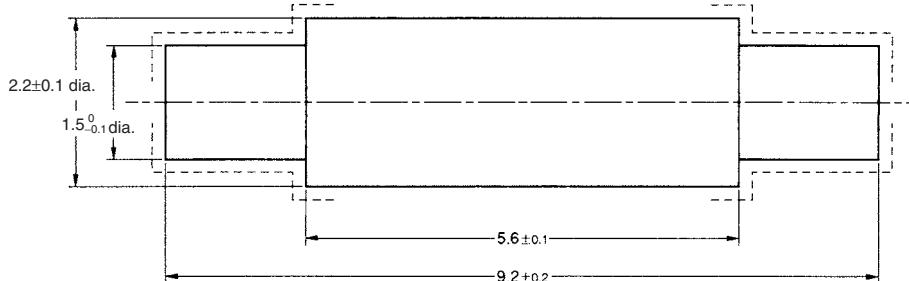

Note: 1. Make sure that the portions marked with dotted lines have no burrs.

2. The material of the actuator must be selected by considering the infrared permeability of the actuator.