



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# 3M™ Mini D Ribbon (MDR) Connectors

.050" Boardmount Thru-Hole Right Angle Plug — Shielded

101 Series

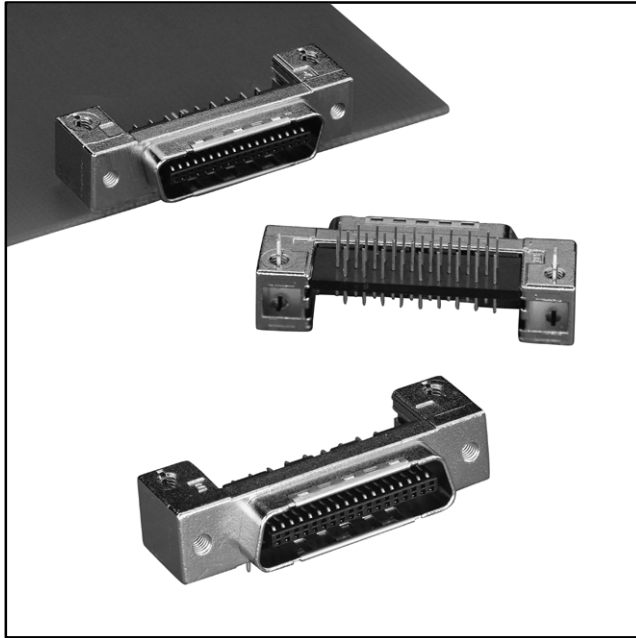

- Wiper-on-wiper contact for reliable repetitive plugging
- Rugged die cast metal case construction
- Screw or ground lock PCB retention
- Normal and reverse “D” interface options for board to board flexibility
- IEEE 1284C Interface as a 36 contact connector
- Contacts: 20, 26, 36 and 50

Date Modified: May 30, 2003

TS-0620-07  
Sheet 1 of 4

---

## Physical

### Insulation

Material: Glass Reinforced Polyester (PCT) - Body  
Glass Reinforced Polyester (PBT) - Alignment Plate

Flammability: UL 94V-0

Color: Black

### Contact

Material: Copper Alloy (C521)

### Plating

Underplating: 80  $\mu$ " (2.54  $\mu$ m) Nickel — QQ-N-290, Class 2

Wiping Area: 30  $\mu$ " (0.76  $\mu$ m) Min Gold — MIL-G-45204, Type II, Grade C

### Body

Material: Zinc Alloy

Plating: Nickel

### Ground Plate

Material: Copper Alloy (C521)

Plating: Nickel

Marking: 3M Logo and Part Number

---

## Electrical

**Current Rating:** 1 A

**Insulation Resistance:**  $>5 \times 10^8 \Omega$  at 500 Vdc

**Withstanding Voltage:** 500 Vrms for 1 Minute

---

## Environmental

**Temperature Rating:** -20°C to +85°C

UL File No.: E68080

**3M**  
**Interconnect Solutions**  
<http://www.3M.com/interconnects/>


3M is a trademark of 3M Company.  
For technical, sales or ordering information call  
**800-225-5373**

# 3M™ Mini D Ribbon (MDR) Connectors

## .050" Boardmount Thru-Hole Right Angle Plug — Shielded

101Series

Contact Quantity	Dimensions			
	A	B	C	D
20	.450 [11.43]	.71 [18.1]	1.081 [27.45]	1.31 [33.3]
26	.600 [15.24]	.87 [22.0]	1.231 [31.26]	1.46 [37.2]
36	.850 [21.59]	1.11 [28.3]	1.481 [37.61]	1.71 [43.5]
50	1.200 [30.48]	1.46 [37.2]	1.831 [46.5]	2.06 [52.4]

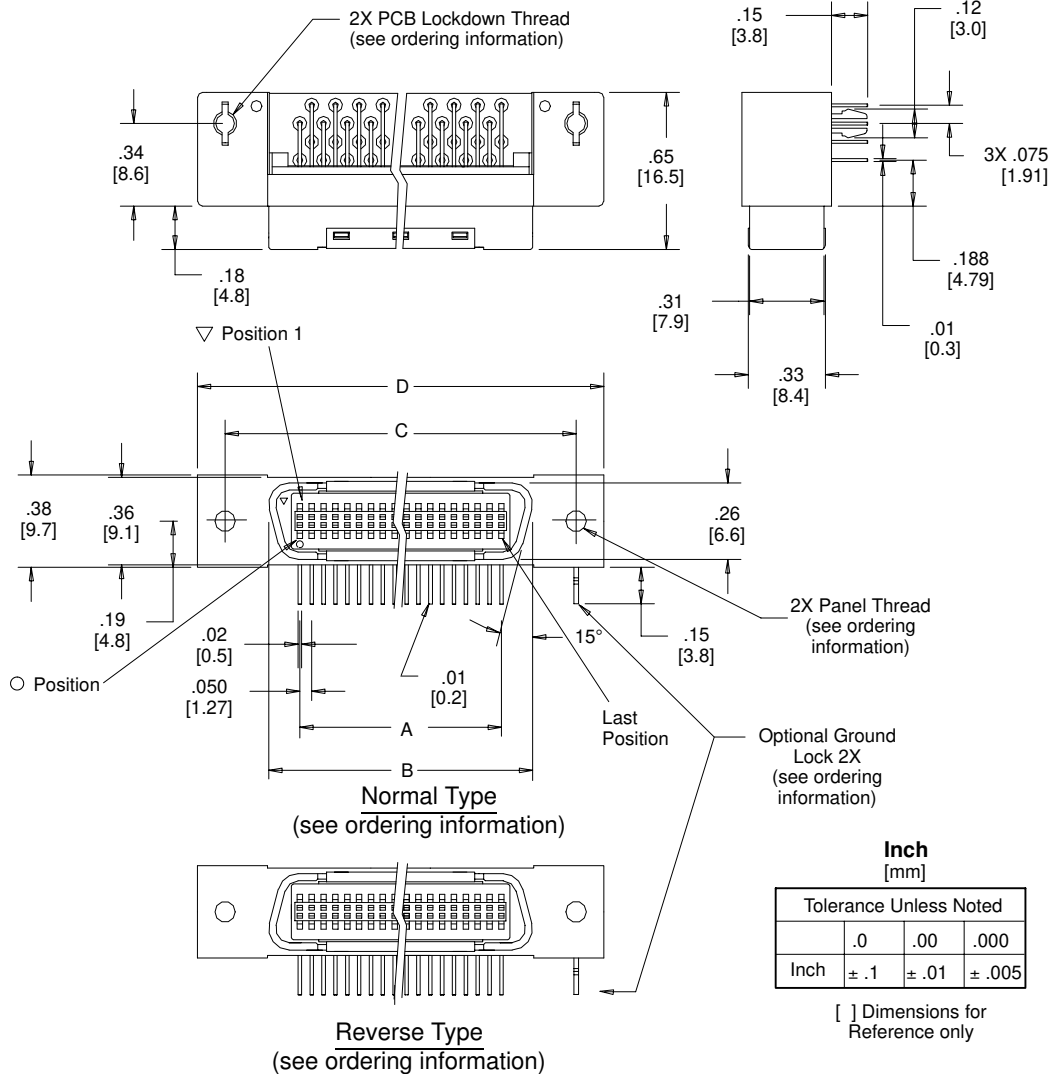

### Ordering Information

**101XX-X2X2VC**

Contact Quantity ————

Panel/Board Retention Feature  
 20, 26, 36 pos:  
 1 = M2.5 panel/M2.5 screw lock  
 B = M2.5 panel/ground lock 50 pos:  
 4 = 4-40 panel/4-40 screw lock  
 E = 4-40 panel/ground lock

Mounting Feature  
 5 = Boardmount Right Angle Normal Type  
 7 = Boardmount Right Angle Reverse Type

TS-0620-07  
 Sheet 2 of 4


# 3M™ Mini D Ribbon (MDR) Connectors

## .050" Boardmount Thru-Hole Right Angle Plug — Shielded

101 Series

Contact Quantity	Dimensions		
	A	B	C
20	.450 [11.43]	1.081 [27.45]	.93 [23.7]
26	.600 [15.24]	1.231 [31.26]	1.08 [27.5]
36	.850 [21.59]	1.481 [37.61]	1.33 [33.9]
50	1.200 [30.48]	1.831 [46.50]	1.685 [42.80]



**Recommended Board Layout (Normal Type Plug)**  
(Plug viewed from connector side; receptacle viewed from bottom side)

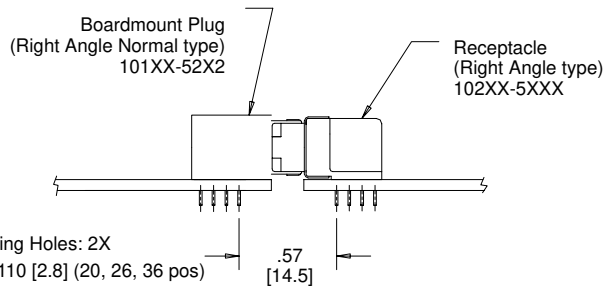


- 1** PC Boardmounting Holes: 2X  
 Screw Lock  $\varnothing$  .110 [2.8] (20, 26, 36 pos)  
 Ground Lock  $\varnothing$  .100 [2.6]  
 Screw Lock  $\varnothing$  .120 [3.0] (50 pos)

For 20 & 36 Position only

For 26 & 50 Position only

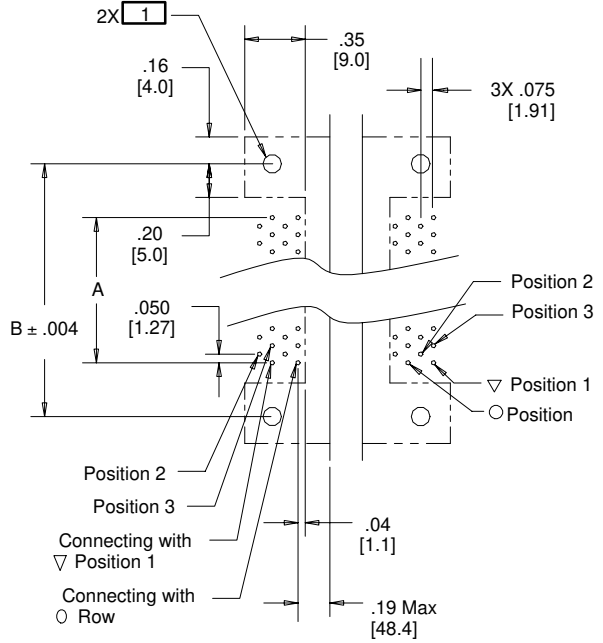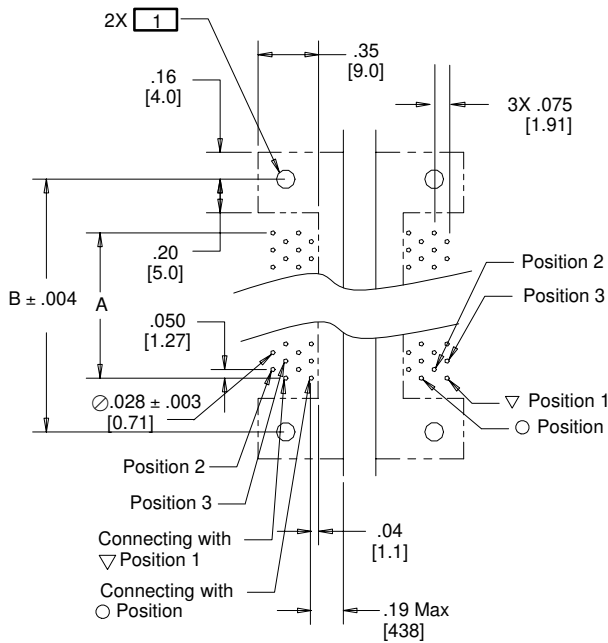

Note: Plated through holes for .062" board thickness

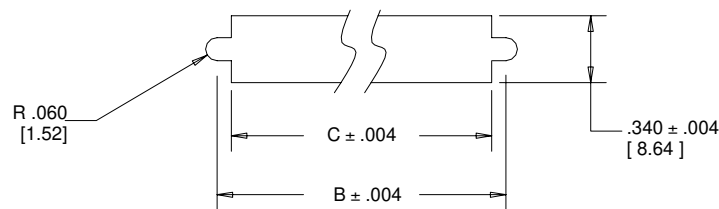

**Recommended Panel Cut-Out**

Note: Panel thickness .079 [2.00] Max.

TS-0620-07  
Sheet 3 of 4


# 3M™ Mini D Ribbon (MDR) Connectors

## .050" Boardmount Thru-Hole Right Angle Plug — Shielded

101 Series


Contact Quantity	Dimensions	
	A	B
20	.450 [11.43]	1.081 [27.45]
26	.600 [15.24]	1.231 [31.26]
36	.850 [21.59]	1.481 [37.61]
50	1.200 [30.48]	1.831 [46.50]

**Recommended Board Layout (Reverse Plug)**  
(Plug viewed from Connector side Receptacle viewed from bottom side)

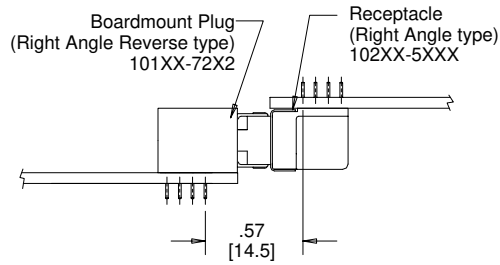


- 1** PC Boardmounting Holes: 2X  
 Screw Lock  $\varnothing$  .110 [2.8] (20, 26, 36 pos)  
 Ground Lock  $\varnothing$  .100 [2.6]  
 Scre Lock  $\varnothing$  .120 [3.0] (50 pos)


For 20 & 36 Position only

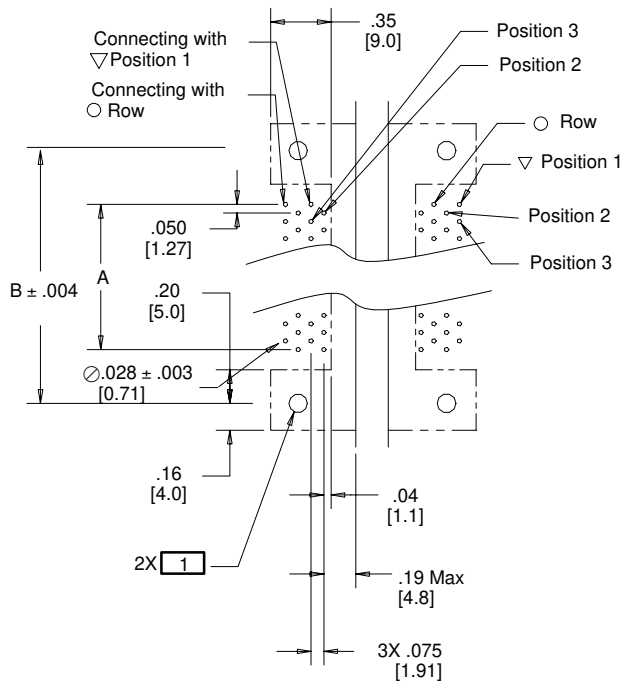

For 26 & 50 Position only

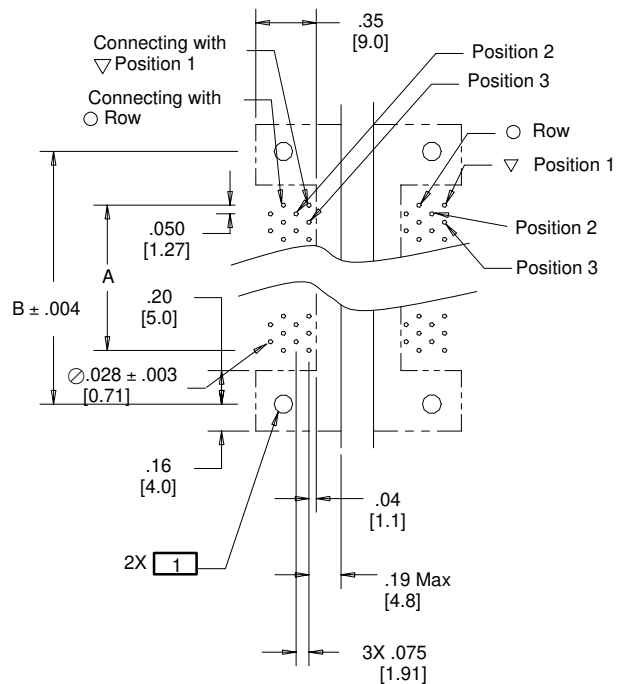

Note: Plated through holes for .062" board thickness

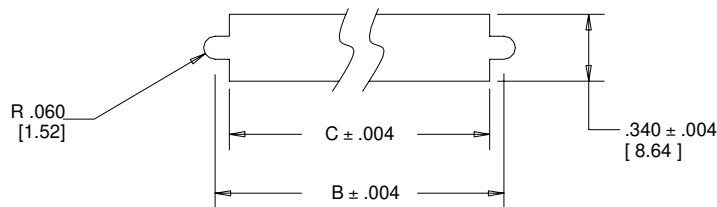

**Recommended Panel Cut-Out**  
 Note: Panel thickness .079 [2.00] Max.

TS-0620-07  
 Sheet 4 of 4

### **Important Notice**

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



**Electronic and Interconnect Solutions Division**

6801 River Place Blvd.  
Austin, TX 78726-9000  
[www.3M.com/eisd](http://www.3M.com/eisd)

### **Warranty; Limited Remedy; Limited Liability.**

This product will be free from defects in material and manufacture for a period of 1 year from the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**