

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# EXB30 Series



#### Dual positive output

DC/DC CONVERTERS

30W High Efficiency DC/DC Converters

- Two independent positive outputs
- · Output voltage tracking
- High efficiency
- Approved to EN60950, UL1950, CSA C22.2 No. 950
- Operating ambient temperature of -40°C to +70°C (natural convection)
- Up to 100% load imbalance
- · Separate trim on each output
- · No minimum load
- Complies with ETS 300 019-1-3/2-3
- Fully compliant with ETS 300 386-1

The EXB30 Dual series are isolated dual positive-output DC/DC converters. The products are designed using a high-efficiency synchronous rectification topology. They feature two independent fully regulated outputs, which are individually trimmable. The EXB30 Dual employs Dynamic Current Allocation such that maximum current can be drawn from either output with a total output current capability of 6A. No minimum load is required for either output. In addition, these products incorporate a tracking feature such that both outputs rise together with their output differential never exceeding 0.7 Volts during start-up. A remote on/off and latching overvoltage protection for both outputs are included as standard. These latches are enabled by default, but can be disabled by the user.











**2 YEAR WARRANTY** 

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

**SPECIFICATIONS** 

#### **OUTPUT SPECIFICATIONS**

Voltage adjustability	Both outputs	±11% min.
Voltage accuracy	Both outputs	±1.5% max.
Line regulation	Low line to high line Low line to high line	Vout1 ±0.4% Vout2 ±0.4%
Load regulation	Full load to no load	±0.4%
Minimum load	Both outputs	0%
Ripple and noise 20MHz bandwidth		150mV pk-pk max. 30mV rms max.
Temperature coefficient		±0.02%/°C
Transient response peak dev. settling time	50% to 75% and bacto 1.0%, no external of	
Short circuit protection Isc 8A rms (See Note 3)	Both outputs	Continuous automatic recovery
Tracking		erential 0.7V during p and in operation

ON

OFF

INPUT SPECIFICATIONS		
Input voltage range	24Vin nominal 48Vin nominal	18 to 36VDC 36 to 75VDC
Input current	No load Remote OFF	150mA max. 4mA max.
UVLO turn ON voltage UVLO turn OFF voltage	All inputs (See Note 2) All inputs (See Note 2)	
Start-up time	Nominal line	20ms max.
Active high remote ON/O		ector ref. to -input

Open circuit voltage

4.5VDC

0.6VDC

#### **EMC CHARACTERISTICS**

ETS 300 386-1 table 5 Conducted emissions	EN55022 with exter EN55022 with exter	nal filter	Level A Level B
Radiated emissions	EN55022 (See App.	Note 109)	Level B
Immunity:			
ESD air	EN61000-4-2	8kV (NP), 1	5kV (RP)
ESD contact	EN61000-4-2	6kV (NÉ),	8kV (RP)
EFT DC power	EN61000-4-4	2kV (NP), 4	lkV (LFS)
EFT signal	EN61000-4-4	1kV (NP), 2	2kV (LFS)
Radiated field enclosure	EN61000-4-3	` 10	V/m`(NP)
Surges indoor signal	EN61000-4-5	5	00V (RP)
Conducted (DC power)	EN61000-4-6		10V (NP)
Conducted (signal)	EN61000-4-6		10V (NP)
Input transients	ETS 300 132-2, ETI	R 283	` /

#### **GENERAL SPECIFICATIONS**

Efficiency		See table
Basic insulation	Input/output	1500VDC
Input fuse 24V Input fuse 48V	(See Note 4)	3.5A slow blow 2.0A slow blow
Switching frequency	Fixed	280kHz
Approvals and standards (See Notes 4, 6)		EN60950 Bi-national UL1950 CSA C22.2 No. 950
Weight		52g (1.84 oz)
MTBF (See Application Note 109)	MIL-HDBK-217	250,000 hours

#### **ENVIRONMENTAL SPECIFICATIONS**

Thermal performance	Operating ambient temperature Non-operating	-40°C to +70°C, See curves -55°C to +105°C
ETS 300 019-2-3	С	lasses T3.1 to T3.5
Air temperature	Low: IEC 68-2-1 High: IEC 68-2-2 Change: IEC 68-2-14	-40°C +70°C -40°C to +70°C
Relative humidity	IEC 68-2-56 IEC 68-2-30	10% to 100% RH Condensation

## EXB30 Series



### Dual positive output

DC/DC CONVERTERS 30W High Efficiency DC/DC Converters

2


For the most current data and application support visit www.artesyn.com/powergroup/products.htm

INPUT	TO OUTPUT VOLTAGE OUTPUT CURRENT (5) OVP (1)		/P <sup>(1)</sup>	TYPICAL	MODEL			
VOLTAGE	1	2	1	2	1	2	EFFICIENCY	NUMBER
18-36VDC	5V	3.3V	6.0A	6.0A	6.25V	4.13V	87%	EXB30-24D05-3V3
18-36VDC	3.3V	2.5V	6.0A	6.0A	4.13V	3.13V	85%	EXB30-24D3V3-2V5
36-75VDC	5V	3.3V	6.0A	6.0A	6.25V	4.13V	88%	EXB30-48D05-3V3
36-75VDC	3.3V	2.5V	6.0A	6.0A	4.13V	3.13V	85%	EXB30-48D3V3-2V5

#### **Notes**

- 1 Latching OVP response time is 1ms (typical). OVP latch is reset by toggling remote ON/OFF or by recycling the input voltage.
- 2 Figures are percentage of minimum input voltage.
- 3 Rshort ≤20mΩ.
- 4 User must provide recommended fuses in order to comply with safety approvals.
- 5 Maximum continuous output power.30 Watts for D05-3V3 models20 Watts for D3V3-2V5 models.
- 6 Maximum temperature on hot spots not to exceed 120°C. See Application Note 109 on our website for details.


CAUTION: Hazardous internal voltages and high temperatures. Ensure that unit is not user accessible.




PIN CONNECTIONS			
PIN NUMBER	FUNCTION		
1	- Vin		
2	No Pin		
3	Remote ON/OFF		
4	+ Vin		
5	OP1 Trim		
6	OP1 Return		
7	OP1		
8	OP2 Trim		
9	OP2 Return		
10	OP2		

#### **EXTERNAL OUTPUT TRIMMING**

All models can be externally trimmed by  $\pm 11\%$  using either method shown below.



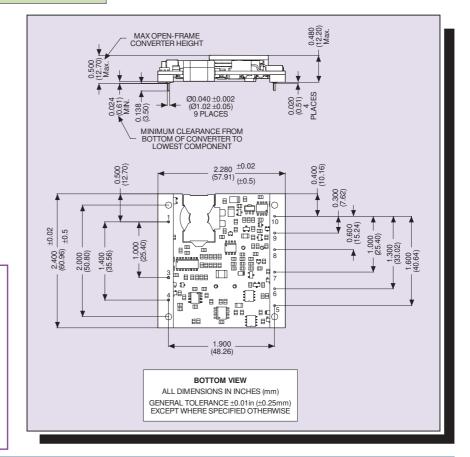

Data Sheet © Artesyn Technologies® 2002

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: ✓ Application Note ✓ Longform Data Sheet

www.artesyn.com