mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





JENNY-8X1-CY

~105° 105° batwing light distribution for canopy and symmetrical tunnel lighting

TECHNICAL SPECIFICATIONS:

Dimensions	280 + 35 mm
Height	11.5 mm
Fastening	glue, pin
Colour	clear
Box size	398 x 298 x 265 mm
Box weight	9.9 kg
Quantity in Box	180 pcs
ROHS compliant	yes 🛈




PRODUCT DATASHEET F14325_JENNY-8X1-CY

MATERIAL SPECIFICATIONS:

Component JENNY-8X1-CY **Type** Lens Material Silicone **Colour** clear

PRODUCT DATASHEET F14325_JENNY-8X1-CY

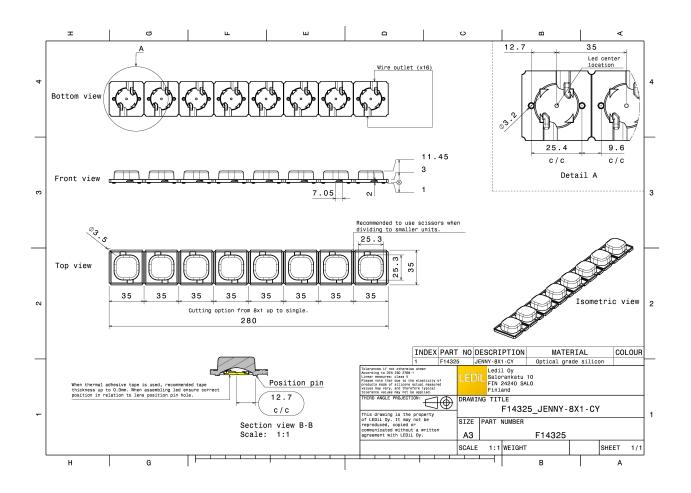


R



bridgelux. LED FWHM Efficiency Peak intensity Required comp		90° 9° 30° 9° 60° 9° 60° 50° 100 60° 60° 60° 60° 60° 60° 60° 6
bridgetux. LED FWHM Efficiency Peak intensity Required comp		20° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0° 0
bridgetux. LED FWHM Efficiency Peak intensity Required comp		
CITIZE LED FWHM Efficiency Peak intensity Required comp	CLL01x 104.0° 94 % 0.440 cd/lm	




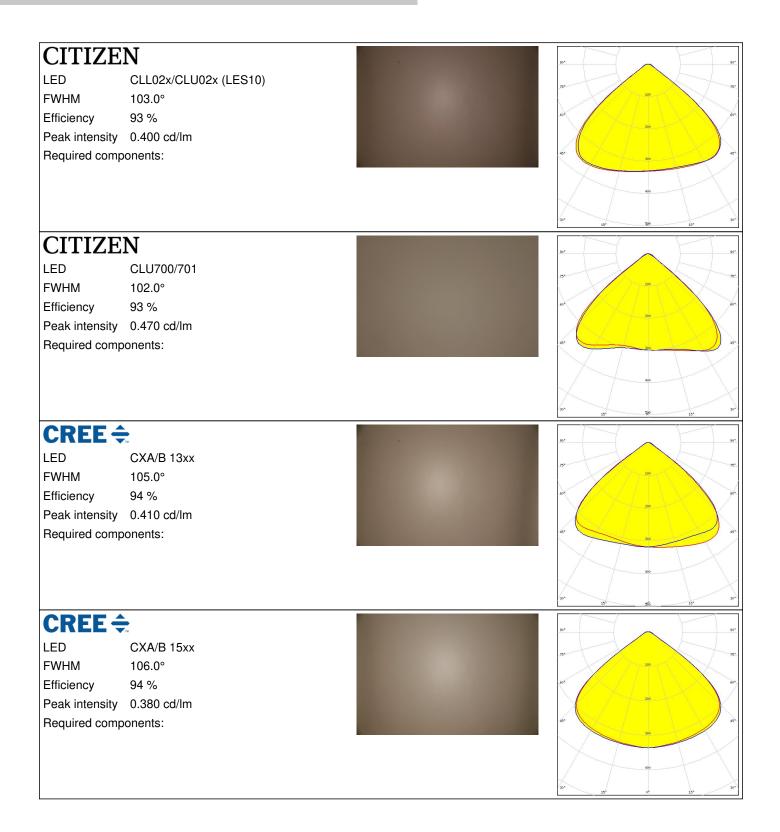

PRODUCT DATASHEET

F14325_JENNY-8X1-CY



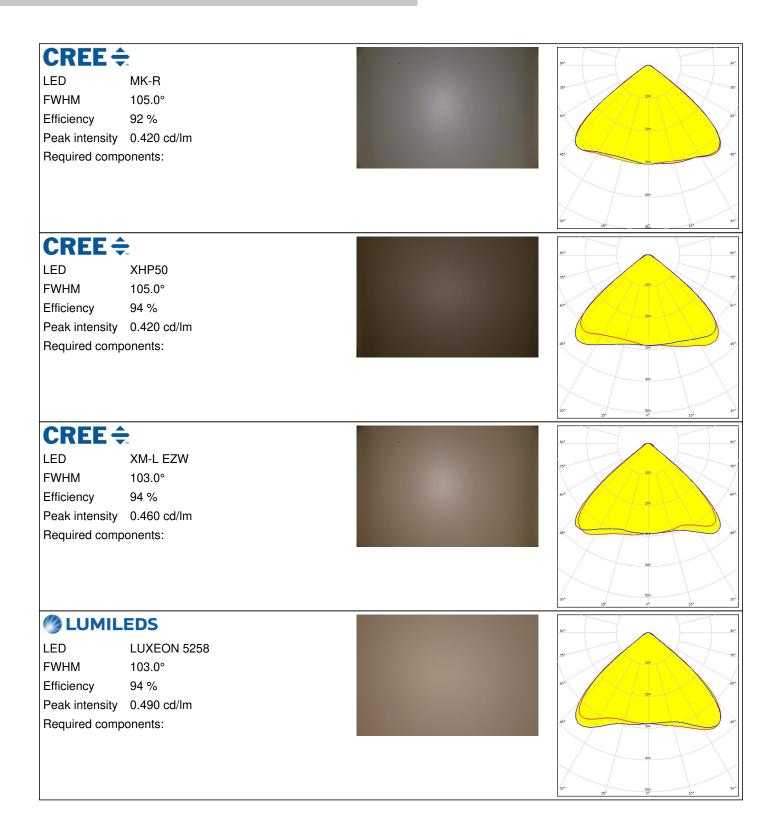

PRODUCT DATASHEET

F14325_JENNY-8X1-CY



	EDS	
LED FWHM Efficiency Peak intensity Required comp	LUXEON M/MX 104.0° 94 % 0.450 cd/lm	90° 10° 10° 10° 10° 10° 10° 10° 1
WNICHIA LED FWHM Efficiency Peak intensity	NSMx286M 105.0° 94 %	99* 99* 73* 100 64*
Required comp		6 ²⁷ 26 60 30 ⁴ 32 29 6 ¹⁰ 10 ⁴ 30 ⁴
OSRAM Doto Semiconductors LED FWHM Efficiency Peak intensity Required comp		
OSRAM Opto Semiconductors LED FWHM Efficiency Peak intensity Required comp		50° 50° 50° 50° 50° 50° 50° 50°




OSRAM Opto Semiconductors		90* 90*
LED	Soleriq P6	736 707
FWHM	107.0°	100_100
Efficiency	94 %	-100 - 100 -
Peak intensity	0.400 cd/lm	
Required comp	oonents:	45°
		400
		20* 30*
OSRAM Opto Semiconductors		
LED	Soleriq P9	
FWHM	106.0°	100
Efficiency	94 %	50* 60*
Peak intensity	0.390 cd/lm	200
Required comp	oonents:	.e
		400
		30* 30*
S ΛΜSI	ING	
LED	COB D Series LES 9.8 mm	
FWHM	106.0°	. 200 - 200 - 200 - 275
Efficiency	94 %	- 10 ⁴
Peak intensity		200
Required comp		45° (
		400
SEOUL		
SEOUL SEMICONDUCTOR		90*
	MJT COB LES 6	734 735
FWHM Efficiency	111.0° 91 %	est est
Peak intensity		200
Required comp		\$°
		30° 15° 30°



SEQUL SEMICONDUCTOR LED FWHM Efficiency Peak intensity Required comp		200
		60 20 ⁴ 20 ⁴ 23 ⁴ 30 ⁴
TRIDON	IIC	30*
LED	SLE G5 LES11	755
FWHM	106.0°	
Efficiency	91 %	604
Peak intensity		
Required comp	onents:	45°
		20° 23° 33°
TRIDON	IIC	90°
LED	SLE G5 LES6	756 770
FWHM	108.0°	
Efficiency	93 %	60 ⁺
Peak intensity		
Required comp	onents:	2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2



PHOTOMETRIC DATA (SIMULATED):

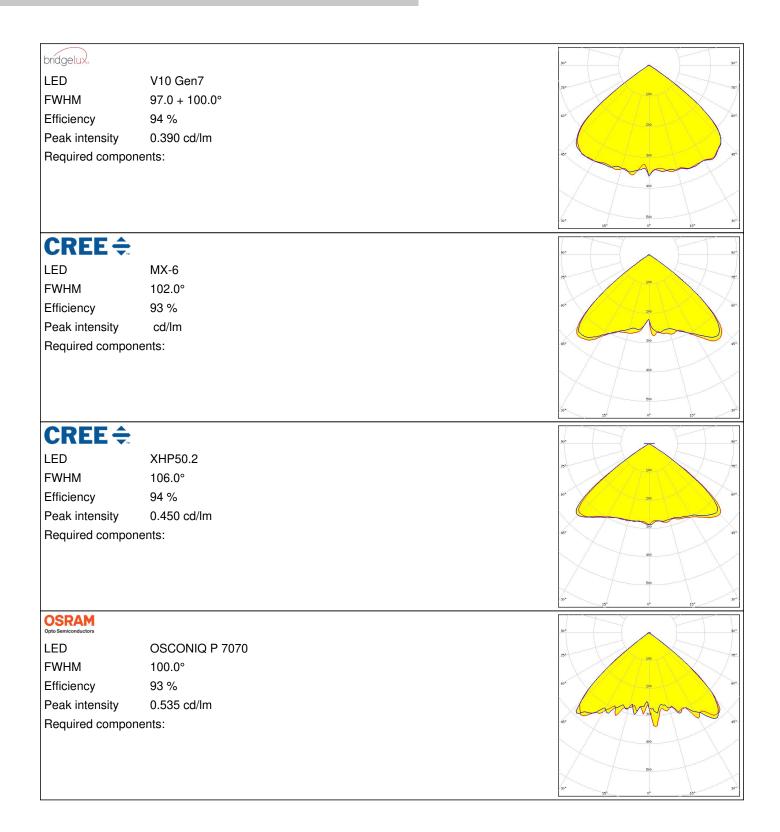

PRODUCT DATASHEET

F14325_JENNY-8X1-CY



PHOTOMETRIC DATA (SIMULATED):

OSRAM Opto Semiconductors		8°.
LED	Soleriq S9	70
FWHM	104.0°	
Efficiency	94 %	set in the set of the
Peak intensity	0.410 cd/lm	
Required compor	nents:	e. <u>30</u>
SHA		90° - 90°
	Mini Zenigata (GW6BM)	20 20
FWHM	105.0°	at an
Efficiency	93 %	
Peak intensity	cd/lm	
Required compor	ients.	
		200 - 20 ¹



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/

where_to_buy