



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



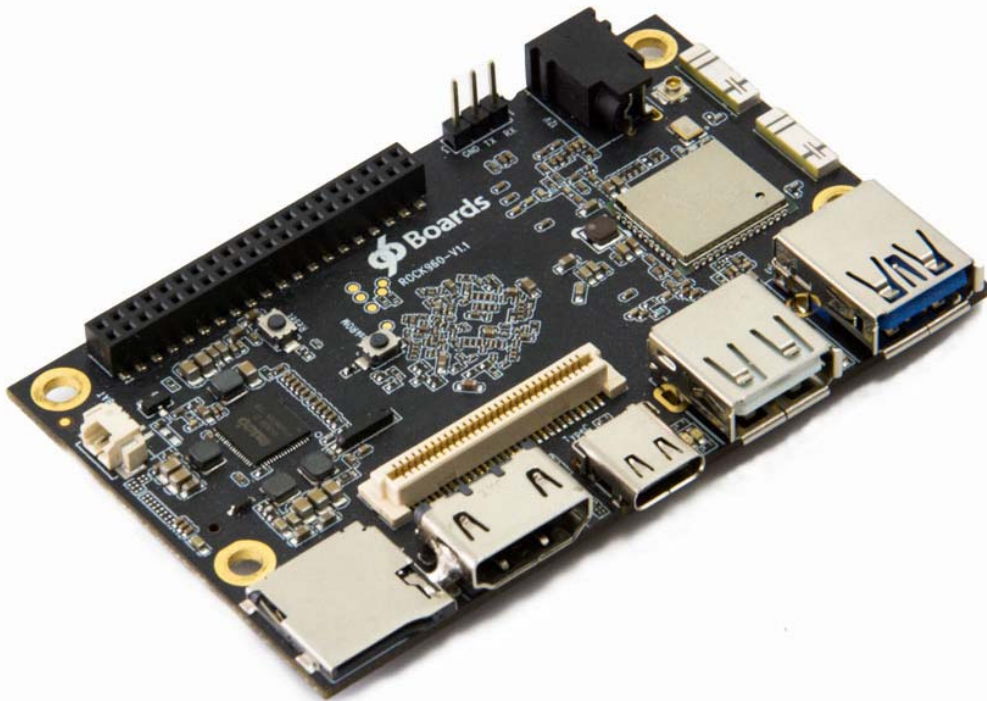

ROCK960 Board - RK3399 solution 2G Version

SKU 102110137

Description

Vamrs is a 96boards contract Manufacturing Partner. ROCK960 is the first 96board based on Rockchip processor. Featuring RK3399 with Dual A72 plus Quad A53 cores and Mali T860MP4 makes it one of the most powerful 96boards

Features :

RK3399(A72x2+A53x4), 2G/16G, 4G/32G
Mali T860MP4, OpenGL 3.2, OpenCL 1.2
HDMI 2.0 4K@60
USB type C with DP 1.2 + USB 3.0
4 lanes PCIE 2.1
2x2 MIMO 802.11 AC Wi-Fi, BT 4.1
96boards Low speed/High speed expansion

Expansion :

1x 40 pin low speed expansion connector – UART, SPI, I2C, GPIO, I2S
1x 60 pin high speed expansion connector – MIPI DSI, USB, MIPI CSI, HSIC, SDIO
1x M.2 key M PCIe connector with support for up to 4-lane PCIe 2.1 (max bandwidth: 2.0 GB)
Misc – Power & u-boot buttons. 6 LEDS (4x user, 1x Wifi, 1x Bluetooth)
Power Supply – 8 to 18V DC input (12V typical) as per 96Boards CE specs; Battery header

Technical Details

Dimensions	85mm x 54mm x 15mm
Weight	G.W 120g N.W 120g
Battery	Exclude
SoC	Rochchip RK3399 hexa-core, ARM Cortex A72 cores up to 1.8/2.0 GHz, four Cortex A53 cores @ 1.4 GHz
Support	ARM Mali-T860 MP4 GPU with OpenGL ES 1.1 to 3.2 support, OpenVG1.1, OpenCL 1.2 and DX 11 support
System Memory	2G RAM

Storage	16 GB eMMC flash + micro SD card
Video Output	1x HDMI 2.0 up to 4K@60 Hz with CEC and HDCP
Connectivity	WiFi 802.11ac 2x2 MIMO up to 867 Mbps, and Bluetooth 4.1 LE (AP6356S module) with two on-board antennas, two u.FL antenna connectors
USB	1x USB 2.0 host port, 1x USB 3.0 port, 1x USB 3.0 type C port with DP 1.2 support

Part List

Rock 960 Board	1
----------------	---