



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



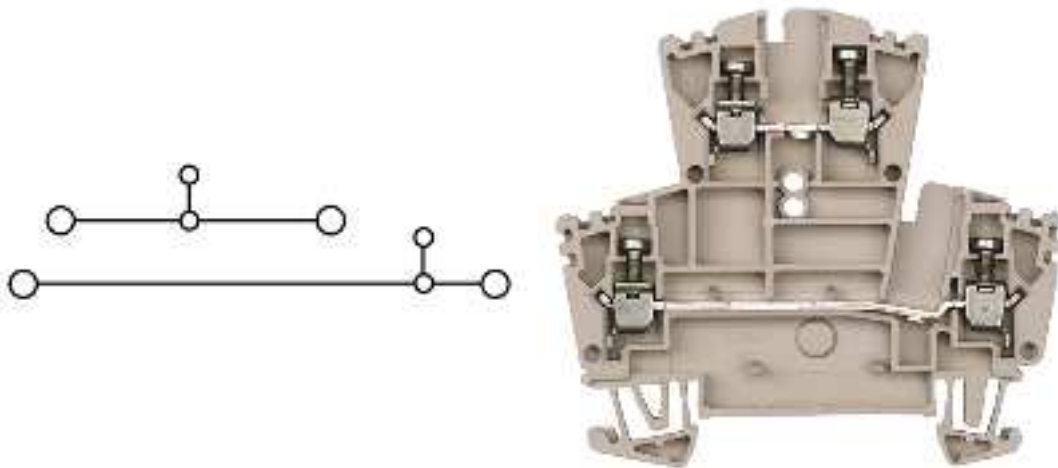

#### General ordering data

Order No.	1021500000
Part designation	WDK 2.5
Version	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
EAN	4008190169527
Qty.	100 pc(s).

#### Product notes

Note, ordering data	For colours available see section W-series accessories "Specific functions"
Note, technical data	2.5 mm <sup>2</sup> conductor with wire end ferrule plus plastic collar only with collar optimised for diameter (order No. 1333100000, 500 pcs)
Product description	Their small size compared to the respective rated cross-section makes the modular terminals with the compact design very popular.
Note, accessories	Test plug and socket, see "W-Series Accessories" section Note the 2.5 mm <sup>2</sup> max. when using the WQB.

#### PT OKIECEEx/ATEX rating data

EU-type examination certificate	KEMA98ATEX1687U
Download, German	KEMA98ATEX1687U_d.pdf
Download English	KEMA98ATEX1687U_e.pdf
IECEX Certificate of Conformity	IECEXULD05.0008U
Download	IECEXULD05.0008U_e.pdf
ATEX voltage	275 V
ATEX current	21 A
ATEX conductor cross-section	2.5 mm <sup>2</sup>
IECEX voltage	275 V
IECEX current	20 A
IECEX conductor cross-section	2.5 mm <sup>2</sup>
Voltage when using cross-connections	CrossConnectionGuide.pdf

**PT OKIECEx/ATEX rating data**

Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

**2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)**

Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	1.5 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	1.5 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	1.5 mm <sup>2</sup>

**Additional technical data**

Colour of insulating material	dark beige
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	2
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Double terminal

**CSA rating data**

Voltage (CSA)	300 V
CSA current	10 A
Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 12

**Conductors for clamping (additional connection)**

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm <sup>2</sup>

**Conductors for clamping (rated connection)**

Clamping range, min.	0.05 mm <sup>2</sup>
Clamping range, max.	4 mm <sup>2</sup>
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	4

**Conductors for clamping (rated connection)**

Stripping length	10 mm
Clamping screw	M 2.5
Blade size	0.6 x 3.5 mm
Tightening torque range	0.4...0.6 Nm
Torque level with DMS electric screwdriver	1
Gauge to IEC 60947-1	A3
Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	4 mm <sup>2</sup>
Stranded, min.	1.5 mm <sup>2</sup>
Stranded, max.	4 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	4 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	2.5 mm <sup>2</sup>
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm <sup>2</sup>
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	2.5 mm <sup>2</sup>
AWG conductor size, min.	AWG 30
AWG conductor size, max.	AWG 12
AWG conductor size, min.	0.05 mm <sup>2</sup>
AWG conductor size, max.	3.31 mm <sup>2</sup>

**Dimensions**

Width	5.1 mm
Height of lowest version	63 mm
Length	69 mm
Weight	14 g
TS 35 offset	35.5 mm

**Disconnect terminals**

Torque level with DMS electric screwdriver	1
--	---

**Rating data**

Rated cross-section	2.5 mm <sup>2</sup>
Rated voltage	400 V
Rated impulse voltage	6 kV
Rated current	24 A
Standards	IEC 60947-7-1
Current with max. conductor	32 A
Pollution severity	3

**UL rating data**

Voltage (UL)	300 V
Current (UL)	20 A
Min. cross-section (UL)	AWG 30
Max. cross-section (UL)	AWG 12

### Approvals

Approvals institutes



### Downloads

STEP 1021500000\_12436\_WDK\_2.5\_STP.stp

### Classifications

eClass 4.1	27-14-11-20
eClass 5.0	27-14-11-20
eClass 5.1	27-14-11-20

### Similar products

Order No.	Part designation	Version
1029100000	WDK 2.5/800V	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, beige, TS 35
1021580000	WDK 2.5 BL	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, blue, TS 35
1036400000	WDK 2.5DU-PE	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1041100000	WDK 2.5 ZQV	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1041180000	WDK 2.5 ZQV BL	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, blue, TS 35
1022300000	WDK 2.5V	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1022380000	WDK 2.5V BL	Feed-through terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, blue, TS 35