



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Circuit Protection Products



Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
12ABCNA(Amp)	124	ATC	46	GDC (S506)	41	NO.263-R	171
12CAV	124	ATM	46	GMA	42	NO.2641	171
12TDLEJ(Amp)	127	BCM Fuse Blocks	152	GMC	42	NO.2641-R	171
12THLEJ(Amp)	127	BH Modular Blocks	154	GMD	42	NO.2642	171
12TKLEJ(Amp)	127	BMM Fuse Blocks	152	H Fuseblocks	144	NO.2661	171
12TXLEJ(Amp)	127	Box Cover Units	155	HCLR	29	NO.2661-R	171
15.5CAV, CAVH	124	CCLB	52	HCTR	29	NO.2662	171
17.5ABGNA(Amp)	124	CCLW	52	HEB	165	NO.2662-R	171
17.5CAV	124	CDNC	102	HET	165	NO.2664	171
17.5TDLSJ(Amp)	127	CDSC	102	HEX	165	NO.2664-R	171
17.5TFLSJ(Amp)	127	CL1	98	HEY	165	NO.616	171
17.5TDMEJ(Amp)	127	Clip Clamps	172	HKP Series	168	NO.626	171
17.5THMEJ(Amp)	127	CM(XX)CF	105	HM25	137	NO.626-R	171
17.5TKMEJ(Amp)	127	CT	94	HM60	137	NO.642-R	171
2A1910-1	172	CVR-J	138	HPF	168	NO.663	171
24ABGNA(Amp)	124	CVRI-J	138	HVAC Disconnects	170	NO.663-R	171
24CAV	124	CVRI-RH	137	In-Line Fuseholders	167	NZ01, NZ02	99
24TDMEJ(Amp)	127	CVRI-RH	137	J Fuseblocks	148	P	40
24THMEJ(Amp)	127	C(XX)BS	108	JC	111	PB1 & PB3 Series	160
24TFMEJ(Amp)	127	C(XX)F	108	JDL	18	PB4, PB5 & PB7 Series	162
24TXMEJ(Amp)	127	C(XX)FBS	108	JFL	20	PONC	102
2703	130	D16, D27, D33, D125	99	JHL	59	R Fuseblocks	144
3.6ABCNA(Amp)	123	DRA-1, DRA-2	134	JM60	138, 142	RM25	137
3.6ABWNA(Amp)	123	E13S	60	KON	35, 102	RM60	137
36ABGNA(Amp)	124	E15SF	61	KOS	35, 102	S	37
3.6ADLSJ(Amp)	127	E25SFX	64	LCL	14	SA	38
3.6ADOSJ(Amp)	127	E50S	68	LCT	91	SAFELOC HRC	108
3.6CAV	123	E50SF	68	LCU	14	SAMI Series	164
3.6WDLSJ(Amp)	127	E60C	71	LENRK	6	SCLR	11
3.6WDOSJ(Amp)	127	E60SF	73	LESRK	6	SEC	25
3.6WFLSJ(Amp)	127	E70SF	75	LET	91	SFC-Fuse-CAB	172
3.6WFOSJ(Amp)	127	EB3P	134	LMMT	91	SFE	46
3.6WKLSJ(Amp)	127	EBS	31	LMT	91	SL	37
36ABGNA(Amp)	124	ECNR	1	MAI	98	SPH50SP	173
36CAV	124	ECSR	1	MAX	46	SPP40SP	177
36TDQSJ(Amp)	127	EDCC	27	MCL	31	T	39
36TFQSJ(Amp)	127	EECAP	134	MDA	44	TC	40
36TXQEJ(Amp)	127	EFSCVR	134	MDL	44	T Fuseblocks	149
3835 Series	169	EHCC	132	MEN	33	TI	98
38CAV, CAVH	124	EHM	132	MEQ	33	TJN	22
4164	55	EPDB Series	157	MID	33	TJS	22
5.5ABWNA(Amp)	123	EPWR	134	MKE	45	TL	39
5.5AMWNA(Amp)	123	ERFL	45	MMT	94	UCL 25XX to 75XX	47
5.5CAV, CAVH	123	ERFS	45	MOL	31	UCLA	47
7.2ABCNA(Amp)	123	ET	94	MT	94	W	38
7.2ABWNA(Amp)	123	FE	94	MV055 Series	115		
7.2AMWNA(Amp)	123	FEE	94	MV155 Series	119		
7.2CAV	123	FM	94	NCLR	11		
7.2WKMSJ(Amp)	127	FMM	94	NH	100		
8000 Series Fuseblocks	169	FP Series (Fusepullers)	172	NO.213	171		
A3354705	124	FWA	61, 63, 65	NO.213-R	171		
A3354745	130	FWC	77	NO.216	171		
ABC	43	FWH	71, 73, 75	NO.216-R	171		
ACK	54	FWJ	86, 88	NO.226	171		
ACL	54	FWP	79, 81, 83	NO.226-R	171		
AGC	43	G Fuseblocks	151	NO.242-R	171		
ALS	54	GBB	43	NO.2621	171		
ANL	55	GDA (S501)	41	NO.2621-R	171		
ANN	56	GDB (S500)	41	NO.263	171		

	Page
UL Fuses: Current Limiting	
Class RK5	Dual-Element, Time-Delay - ECNR/ECSR 1
Class RK1	Dual-Element, Time-Delay - LENRK/LESRK 6
Class RK	Fast-Acting - NCLR/SCLR 11
Class L	Time-Delay - LCL 14
	Fast-Acting - LCU 14
Class J	Dual-Element, Time-Delay - JDL 18
	Fast-Acting - JFL 20
Class T	Extremely Fast-Acting - TJN/TJS 22
Class G	SEC 25
Class CC	Time-Delay - EDCC 27
	Time-Delay - HCTR 29
	Fast-Acting - HCLR 29
<hr/>	
UL Fuses: General Purpose	
Midget Fuses ($\frac{1}{32}$ " x $1\frac{1}{2}$ ")	Fast-Acting - MCL 31
	Fast-Acting - MOL 31
	$\frac{13}{32}$ " x $1\frac{3}{8}$ ", Fast-Acting - EBS 31
	Time-Delay - MEN 33
	Time-Delay - MEQ 33
	Pin Indicating, Time-Delay - MID 33
Class H and KS "One-Time"	Fast-Acting - KON/KOS 35
Plug Fuses	Rejection Base, Dual-Element, Time-Delay - S 37
	Rejection Base, Time-Delay - SL 37
	Edison Base, Fast-Acting - W 38
S and SL Rejection Base Fuse Adapter	SA 38
Plug Fuses	Edison Base, Dual-Element, Time-Delay - T 39
	Edison Base, Time-Delay - TL 39
	Edison Base, Dual-Element, Time-Delay - TC, P 40
5 x 20mm Fuses	Ceramic, Fast-Acting - GDA (S501) 41
	Glass, Fast-Acting - GDB (S500) 41
	Glass, Time-Delay - GDC (S506) 41
	Glass, Fast-Acting - GMA 42
	Glass, Medium Time-Delay - GMC 42
	Glass, Time-Delay - GMD 42
$\frac{1}{4}$ " x $1\frac{1}{4}$ " Fuses	Glass, Fast-Acting - ABC 43
	Glass, Fast-Acting - AGC 43
	Ceramic, Very Fast-Acting - GBB 43
	Ceramic, Time-Delay - MDA 44
	Glass, Time-Delay - MDL 44
Electronic & Electrical Fuse Displays	ERFL/ERFS, MKE 45
& Assortments	Glass, Fast-Acting - SFE 46
Automotive Fuses	Blade, Fast-Acting – ATM, ATC, MAX 46
<hr/>	
Special Purpose Fuses	
Cable Limiters	UCL/UCLA 47
Capacitor Fuse, Non-Time-Delay	CCLB/CCLW 52
Lift Truck Fuses	ACK/ACL/ALS 54
Limiters	ANL Non-Time-Delay 55
	ANN Very Fast-Acting 56
High Speed Fuses 57
	JHL 59
	FWA, 5 - 30A (10 x 38mm) and 35 - 60A (21 x 51mm) 61
	FWA, 70 - 1000A 63
	FWA, 1000 - 4000A 65
	FWX, 1-50A (14 x 51mm) 67
	FWX, 35 - 2500A 69
	FWH, 0.25 - 30A (6 x 32mm) 71
	FWH, 1 - 30A (14 x 51mm) 73
	FWH, 35 - 1600A 75
	FWC, 6 - 32A (10 x 38mm) 77
	FWP, 1 - 50A (14 x 51mm) 79
	FWP, 20 - 100A (22 x 58mm) 81
	FWP, 5 - 1200A 83

Special Purpose Fuses (Con't)

FWJ, 20 - 30A (14 x 67mm)	86
FWJ, 35 - 2000A	88
British Style	90
LCT, LET, LMT, LMMT, 6 - 900A	91
CT, ET, FE, EET, FEE, FM, FMM, MT, MMT, 6 - 710A	94
Trip Indicators	98
Microswitch Adapter - MAI	98
Type "D" Bottle Fuses	99
Neozed Fuses	99
NH Fuses	100
Canadian Fuses & Accessories	
Standard Code Fuses 250V & 600V	
KOS/KON/PONC	102
CDSC/CDNC	102
Fuse Holders	
CAMaster HRC Fuse Holder	105
SAFEloc HRCI-CB Fuse Holder	108

Medium Voltage Fuses

R-Rated Fuses	JCG, JCH, JCK, JCL, JCR, 25 - 450A (2.4 - 7.2kV)	111
E-Rated Fuses	MV055, 5 - 450A (5.5kV)	115
	MV155, 5 - 200A (15.5kV)	119
Potential Transformer Fuses	AB, AM and CAV Series (3.6 to 38kV)	123
High Voltage DIN Distribution Fuses	3.6 to 36kV	126

Fuse Blocks, Holders & Misc.

Class CC Global Modular Fuse Holders	CH Series, 8x32, 10x38, 14x51, 22x58	132
Class R H(K) and J Modular Knifeblade Blocks	Class R H(K) 250 and 600V, Class J 600V	136
Class J Power Distribution Fuse Blocks	JM60_, 70 - 400A, 600V	142
Class H (K) and R Fuse Blocks	H250, H600, R250 and R600 Series	144
Class J Fuse Blocks	J600 Series	148
Class T Fuse Blocks	T300 and T600 Series	149
Class G Fuse Blocks	BG and G Series	151
Class CC Fuse Blocks	BCM and BMM Series	152
Modular Fuse blocks	BH Series	154
Edison Base Plug Fuse Holders	Box Cover Units	155
Power Blocks	Enclosed Power Distribution Blocks	157
	High SCCR Terminal Blocks	160
	Power Distribution Blocks	162
SAMI Fuse Covers	For Class J, RK, K5, H and Midget Fuses	164
In-line Fuse Holders	Class CC and Midget Fuses - HEB/HET/HEY/HEX	165
Panel Mount Fuse Holders	1/4" x 1 1/4" Fuses - HKP, HKP-HH/HKP-W	168
	1 3/32" x 1 1/2" Fuses - HPF	168
Fuse Blocks	1 3/32" x 1 1/2" Fuses - 3835 Series	169
	1/4" x 1 1/4" Fuses - S-8000 Series	169
HVAC Disconnects	B22 Series	170
Fuse Reducers	Class H, J, K, & R	171
Spare Fuse Cabinet	SFC-FUSE-CAB	172
Fuse Clip Clamp	172
Fuse Pullers	FP Series	172

Surge Protective Devices

SurgePOD™ HEAVY DUTY	NEMA 4X Rated HEAVY DUTY Type 1 UL Listed SPD	173
SurgePOD™ PRO	NEMA 4X Rated PRO Type 1 UL Listed SPD	177

Elements of a Practical Fuse Specification 180

Fuse Terminology 181

Cross Reference Guides 183

Quick Cross Reference Guide 190



**Catalog Number ECNR (1 - 600A) 250Vac or Less
Catalog Number ECSR (1 - 600A) 600Vac or Less**

Amp Ratings					
ECNR					
1	8	25	70	150	400
2	9	30	75	175	450
3	10	35	80	200	500
4	12	40	90	225	600
5	15	45	100	250	—
6	17.5	50	110	300	—
7	20	60	125	350	—
ECSR					
1	8	25	70	150	400
2	9	30	75	175	450
3	10	35	80	200	500
4	12	40	90	225	600
5	15	45	100	250	—
6	17.5	50	110	300	—
7	20	60	125	350	—

ECNR/ECSR Specifications

Dual-Element Time-Delay

Voltage Rating: ECNR - 250Vac
 ECNR - (1-60A, 110-200A) 125Vdc;
 (225-600A) 250Vdc
 ECSR - 600Vac
 ECSR - (1-30A, 70-600A) 300Vdc
 (35-60A) 250Vdc

Amp Rating: 1 - 600A

Interrupting Rating: 200kA RMS Symmetrical Amps

Current Limiting: RK5 Fuse

Agency Information:

UL Listed for US and Canada, Class RK5, Guide JDDZ, File E162363

Interrupting Rating: ECNR/ECSR 20kA DC

Benefits:

- True dual-element construction allows sizing of 125% FLA for motor backup protection.
- Superior overload and cycling capabilities.
- Current limiting provides component short-circuit protection.

Applications:

- Recommended for AC power distribution system mains, feeders, and branch circuits.
- Protection of motors and motor branch circuits.
- Protection of transformers and other inductive loads.
- All general-purpose applications including lighting, heating and other non-inductive loads.

Recommended Fuse Blocks:

Refer to pages 146 in this catalog.

Recommended Upgrade:

Class RK1 (LENRK/LESRK) for greater degree of short-circuit protection.

CROSS REFERENCE			
VOLTS	EDISON	MERSEN	LITTELFUSE
250	ECNR	TR	FLNR
600	ECSR	TRS	FLSR

ECNR/ECSR Dual Element Fuses

These fuses are recommended for AC power distribution system mains, feeders and branch circuits having inductive loads (motors, transformers) or non-inductive loads (lighting, heating) where the available short-circuit current does not exceed 200,000 RMS symmetrical amps. These “dual-element, time-delay” fuses have minimum industry standard time-delay of 10 seconds at 5 times the fuse rating (8 sec. minimum for 250V, 30A and less). The time-delay


characteristics of these fuses typically allows them to be sized closer to the running ampacity of inductive loads to reduce cost and provide improved overcurrent protection. These fuses will override normal equipment current surges to reduce unnecessary fuse openings. They are the most popular fuses used in the industry and the most economical for most applications, especially motors and transformers. They have moderate current limitation.

Class R fuses will fit Class H, K and R fuse clips. Class R fuse clips will only accept Class R fuses. Fuses rated 600Vac or less may be applied at any lower voltage.

Dimensions



Ferrule Design—0 through 60 Amps


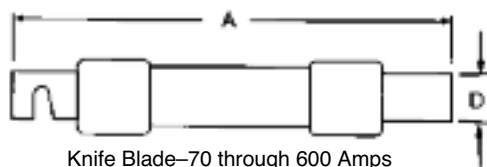


Knife Blade—70 through 600 Amps





Catalog Number	Amps	Overall Length - in	Max Diameter - in
		A	B
ECNR	0-30	2	0.56
	35-60	3	0.81
	70-100	5.88	1.06
	110-200	7.13	1.56
	225-400	8.63	2.38
	450-600	10.38	2.88
ECSR	0-30	5	0.81
	35-60	5.5	1.06
	65-100	7.88	1.11
	110-200	9.63	1.61
	225-400	11.63	2.34
	450-600	13.38	2.88

Average Melt Time-Current Curves
Cat No. ECNR (Amp)

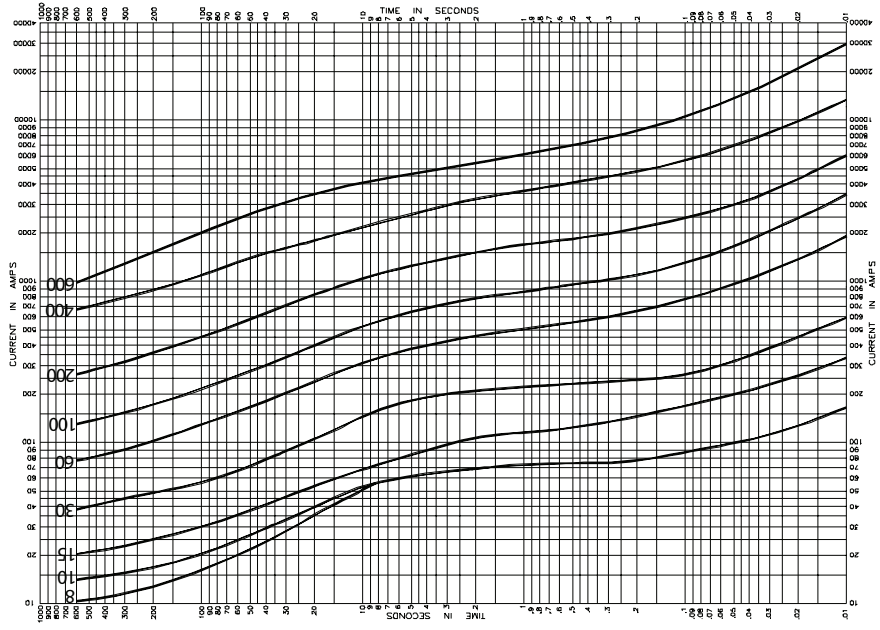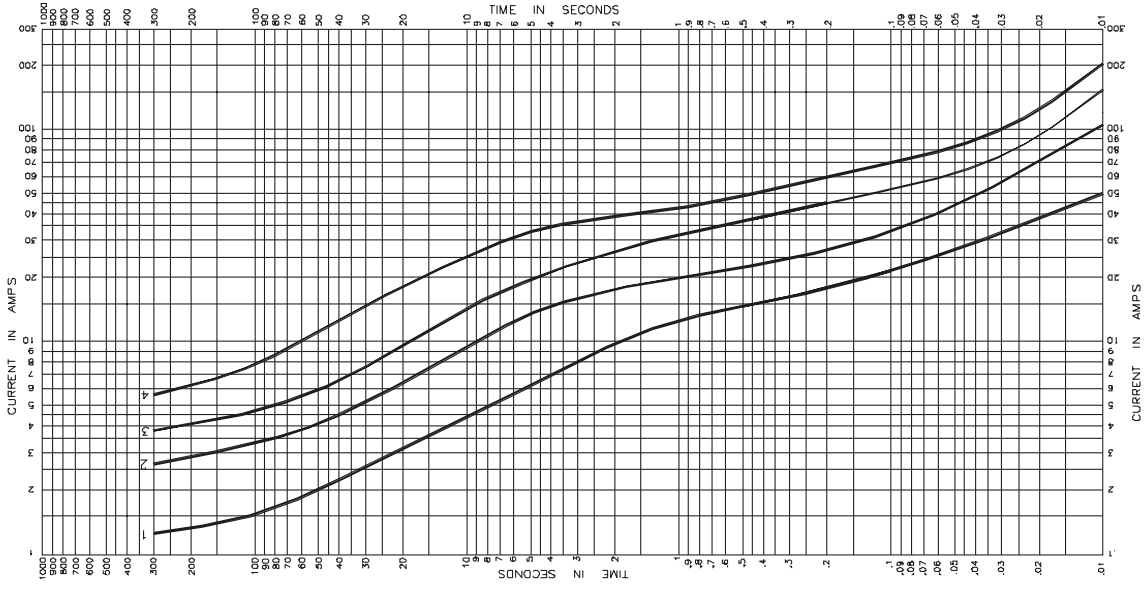

Average Melt Time-Current Curves
Cat No. ECSR (Amp)

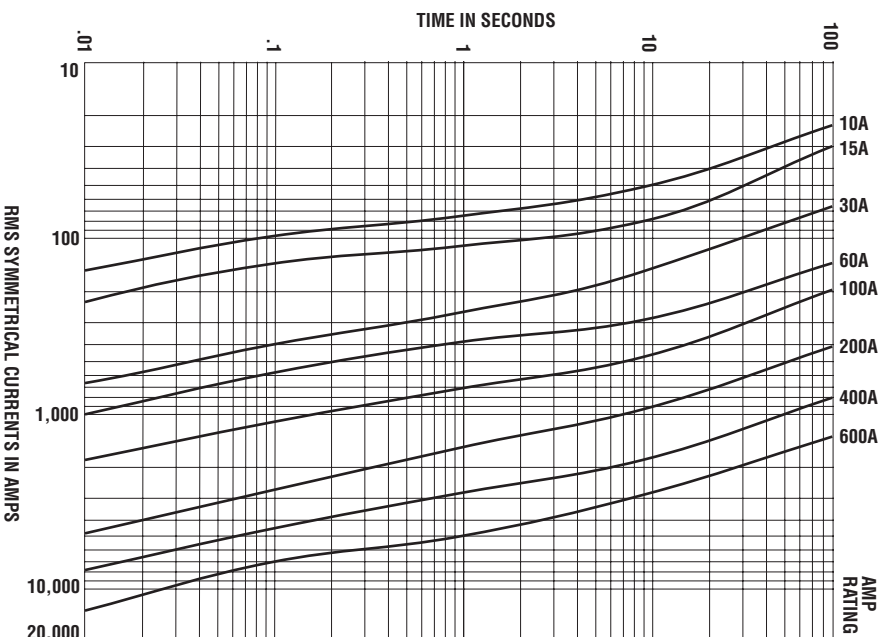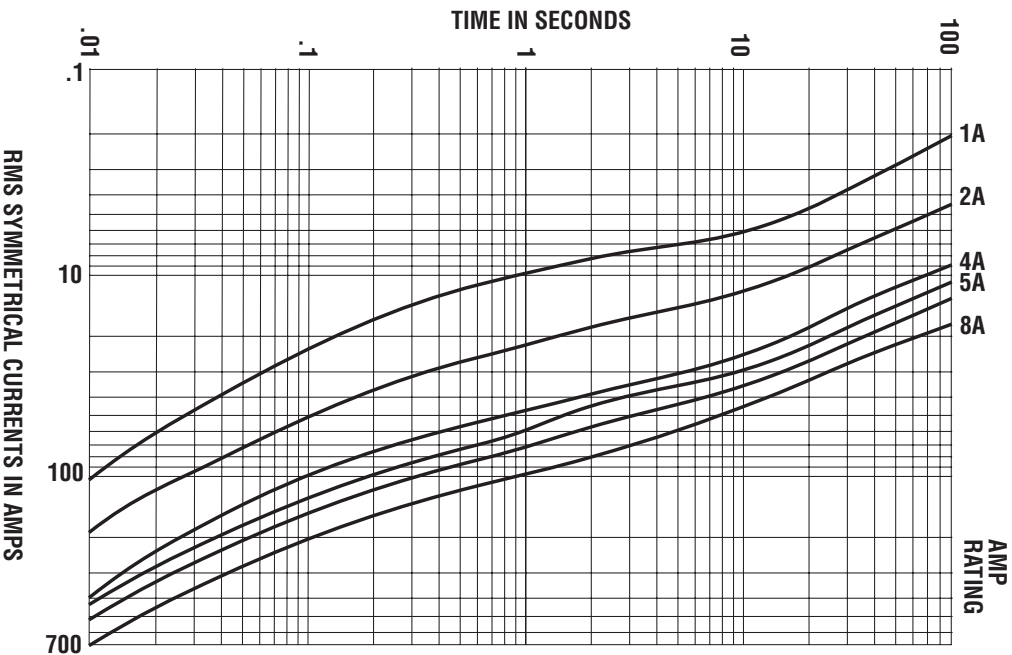


Peak Let-Through Current Curves

ECNR



ECSR

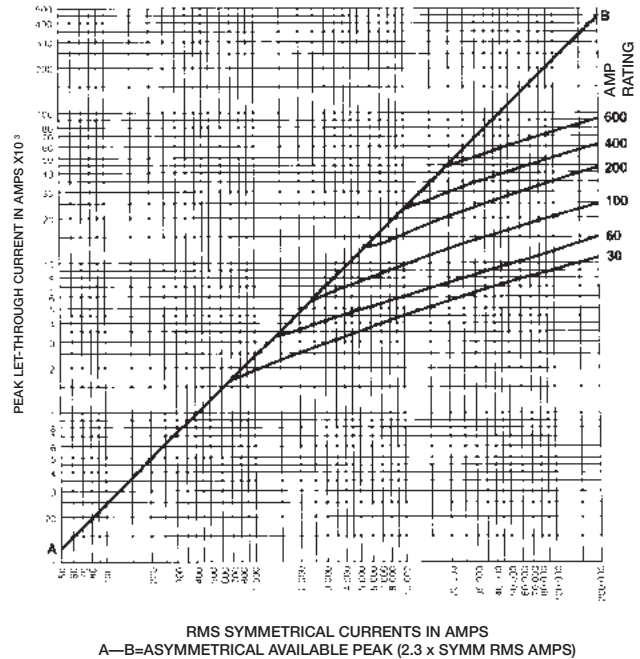

Current Limitation Tables

ECNR*


Available Fault Current RMS Amperes	Apparent Effective Let-Through Amperes					
	Fuse Amp Ratings					
	30A	60A	100A	200A	400A	600A
5,000	1,050	2,070	2,820	4,300	5,000	5,000
10,000	1,310	2,570	3,630	5,400	8,700	10,000
15,000	1,490	2,920	4,140	6,200	9,900	15,000
20,000	1,630	3,200	4,500	6,800	10,700	16,100
25,000	1,720	3,420	4,800	7,200	11,400	17,200
30,000	1,840	3,630	5,100	7,700	12,100	18,300
35,000	1,920	3,810	5,400	8,100	12,600	19,200
40,000	2,000	3,980	5,600	8,500	13,100	19,900
50,000	2,140	4,200	6,000	9,100	14,000	21,400
60,000	2,260	4,500	6,400	9,600	14,900	22,600
80,000	2,450	4,900	7,000	10,600	16,000	24,600
100,000	2,620	5,200	7,500	11,400	17,100	26,200
150,000	2,920	5,800	8,300	13,000	19,200	29,200
200,000	3,140	6,200	8,900	14,300	20,800	31,700

ECSR*

Available Fault Current RMS Amperes	Apparent Effective Let-Through Amperes					
	Fuse Amp Ratings					
	30A	60A	100A	200A	400A	600A
5,000	1,290	2,070	2,980	5,000	5,000	5,000
10,000	1,640	2,590	3,810	6,500	8,800	10,000
15,000	1,890	2,940	4,400	7,500	10,200	15,000
20,000	2,110	3,250	4,800	8,300	11,400	18,200
25,000	2,260	3,470	5,200	8,900	12,400	19,600
30,000	2,420	3,660	5,500	9,600	13,200	21,100
35,000	2,570	3,850	5,800	10,100	14,100	22,400
40,000	2,670	4,030	6,000	10,500	14,700	23,400
50,000	2,890	4,300	6,500	11,400	16,000	25,300
60,000	3,060	4,500	6,900	12,100	17,200	27,000
80,000	3,360	4,900	7,600	13,400	19,100	29,500
100,000	3,630	5,200	8,200	14,400	20,700	31,700
150,000	4,100	5,800	9,300	16,500	23,900	36,300
200,000	4,400	6,100	10,400	18,300	26,700	39,500

*"Apparent Let-Through Amperes" values are read from "Peak Let-Through Current Curves" and the peak current value divided by 2.3 Asymmetry Factor.

LENRK/LESRK Class RK1 Dual-Element Time-Delay Fuses

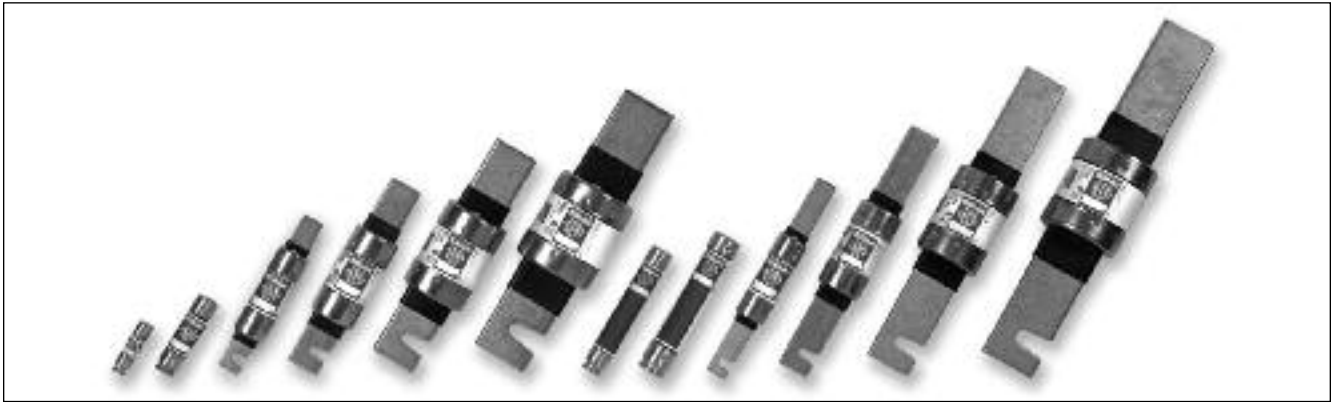

Catalog Number LENRK (0.2 - 600A) 250Vac or Less
Catalog Number LESRK (0.25 - 600A) 600Vac or Less

Amp Ratings				
LENRK				
0.2	2	6.25	40	175
0.3	2.25	8	45	200
0.4	2.5	9	50	225
0.5	3	10	60	250
0.6	3.2	12	70	300
0.8	3.5	15	80	350
1	4	17.5	90	400
1.125	4.5	20	100	450
1.4	5	25	110	500
1.6	5.6	30	125	600
1.8	6	35	150	
LESRK				
0.5	2.5	7	40	175
0.6	2.8	8	45	200
1	3	9	50	225
1.125	3.2	10	60	250
1.25	3.5	12	70	300
1.4	4	15	80	350
1.5	4.5	17.5	90	400
1.6	5	20	100	450
1.8	5.6	25	110	500
2	6	30	125	600
2.25	6.25	35	150	

LENRK/LESRK Specifications

Dual-Element Time-Delay

Voltage Rating: LENRK - 250Vac, LESRK - 600Vac

Amp Rating: 0.2 - 600A

Interrupting Rating: 200kA RMS Symmetrical Amps

Current Limiting: RK1 Fuse

Agency Information:

UL Listed, Class RK1, Guide JDDZ, File E162363
 CSA Certified, HRCI-R per C22.2, No. 248.12

Self-Certified DC Ratings:

Voltage Rating: LENRK (0-60A) 125Vdc; (70-600A) 250Vdc
 LESRK (0.25-600A) 300Vdc

Interrupting Rating: LENRK/LESRK 20kA DC

Benefits:

- True dual-element spring - trigger construction allows sizing of 125% FLA for motor backup protection.
- Superior overload and cycling capabilities.
- Extremely current limiting provides superior short-circuit component protection.

Applications:

- Recommended for AC power distribution system mains, feeders, and branch circuits.
- Protection of motors and motor branch circuits.
- Type 2 "No Damage" protection for IEC components.
- All general-purpose applications including lighting, heating and other non-inductive loads.

Recommended Fuse Blocks:

Refer to pages 145 and 146 in this catalog.

Recommended Upgrade:

None.


CROSS REFERENCE			
VOLTS	EDISON	MERSEN	LITTELFUSE
250	LENRK	A2DR	LLNRK
600	LESRK	A6DR*	LLSRK

*Not dual element 110 - 600 Amp

LENRK/LESRK Dual-Element Fuses


The application recommended for these fuses is exactly the same as for the Edison ECNR/ECSR fuses except for the advantages of greater current limitation. The Edison LENRK/LESRK fuses have up to 40% more current limitation and up to 350% more Amps-Squared-Second (I^2t) limitation under fault conditions than Edison ECNR/ECSR fuses to reduce potential for damage. In addition, LENRK/LESRK fuses allow better selectivity for electrical power system designers and better short-circuit protection for breakers having inadequate interrupting ratings. ECNR/ECSR and LENRK/LESRK fuse lines are physically interchangeable (and electrically interchangeable per UL equipment listing conditions) and are recommended as a practical, economical way to upgrade systems for many situations.

True Dual-Element Construction

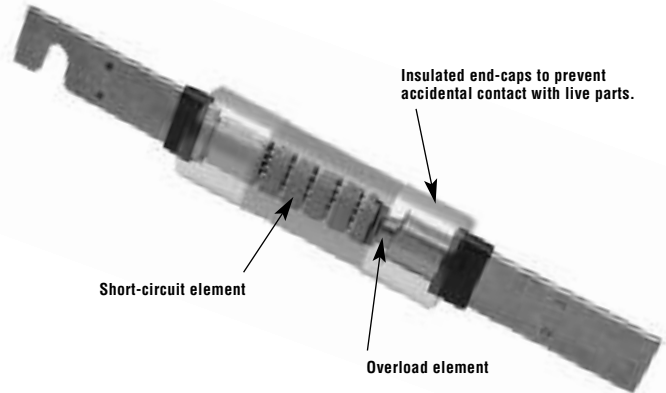


Class R fuses will fit Class H, K and R fuse clips. Class R fuse clips will only accept Class R fuses. Fuses rated 600Vac or less may be applied at any lower voltage.

Dimensions

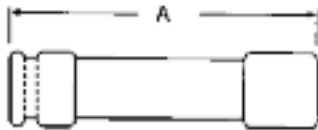

Ferrule Design—0 through 60 Amps

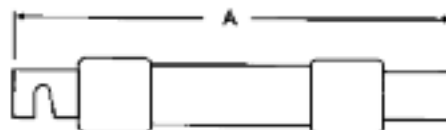

Knife Blade—70 through 600 Amps




Catalog Number	Amps	Overall Length - in	Max Diameter - in
		A	B
LENRK	0-30	2	0.56
	35-60	3	0.81
	70-100	5.88	1.10
	110-200	7.13	1.61
	225-400	8.63	2.38
LESRK	450-600	10.38	2.88
	0-30	5	0.81
	35-60	5.5	1.06
	70-100	7.88	1.11
	110-200	9.63	1.61
	225-400	11.63	2.36
	450-600	13.38	2.88

**LENRK/LESRK Class RK-1
Dual-Element Time-Delay Fuses**




Average Melt Time-Current Curves

LENRK (Amp)

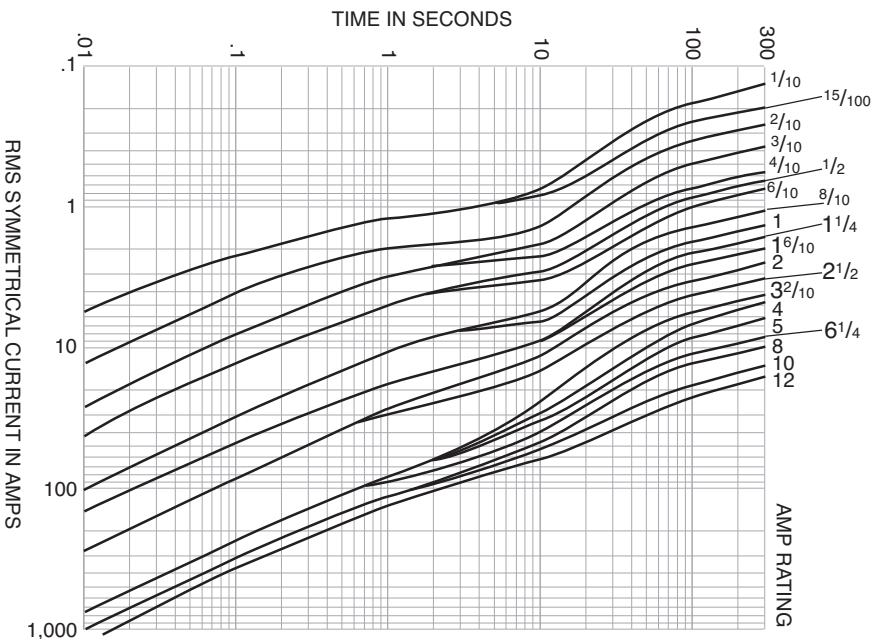


LESRK (Amp)

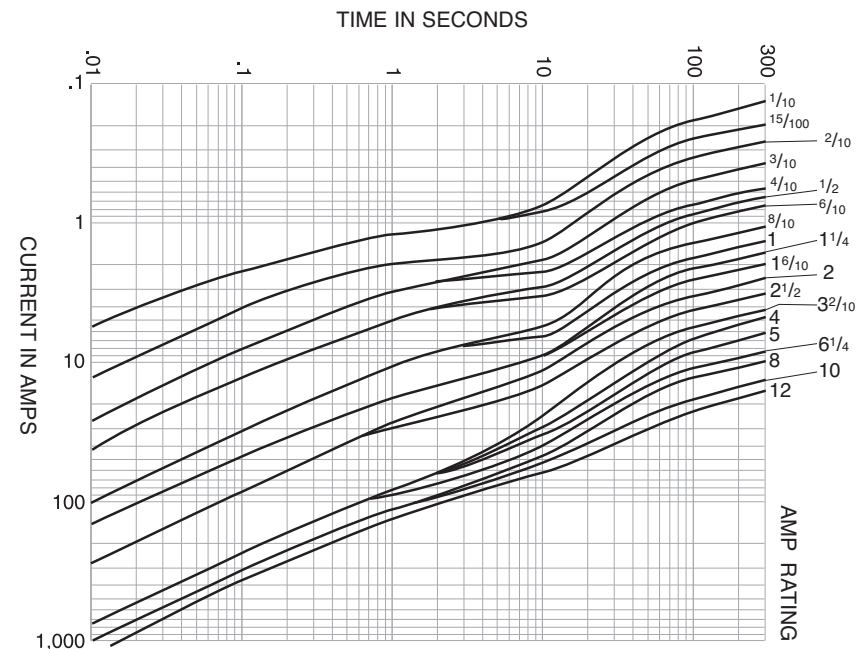


Average Melt Time-Current Curves

LENRK

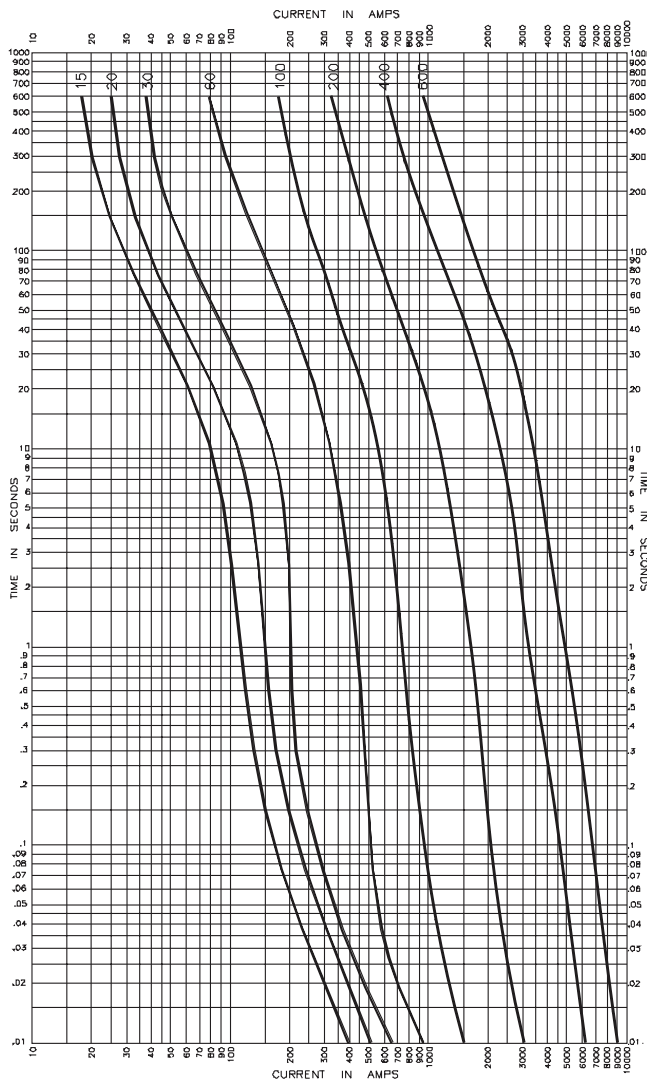


LESRK

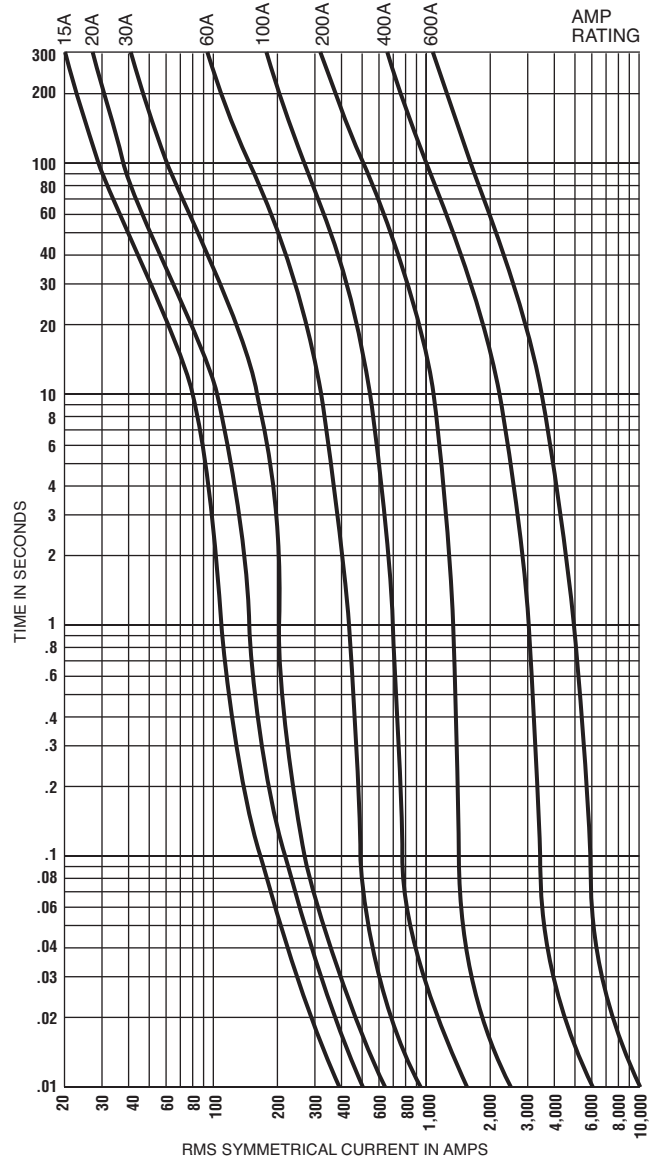


Peak Let-Through Current Curves*

LENRK

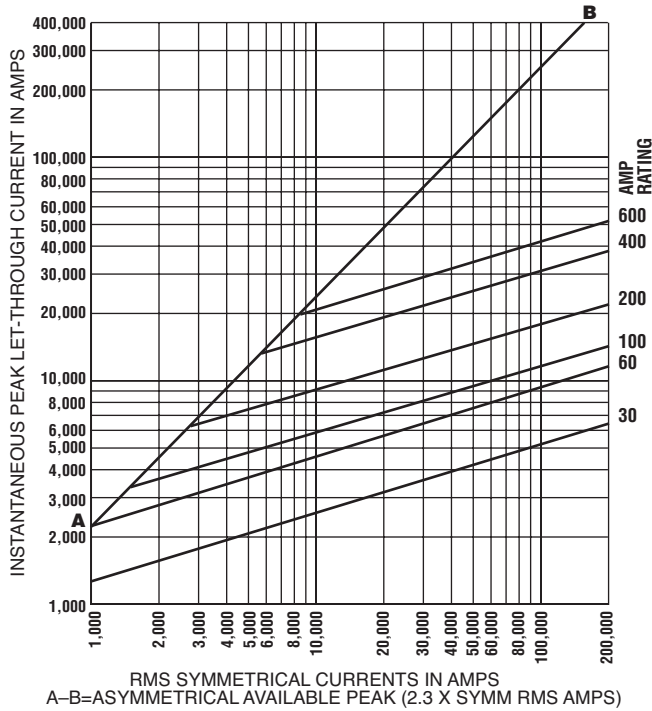

LESRK

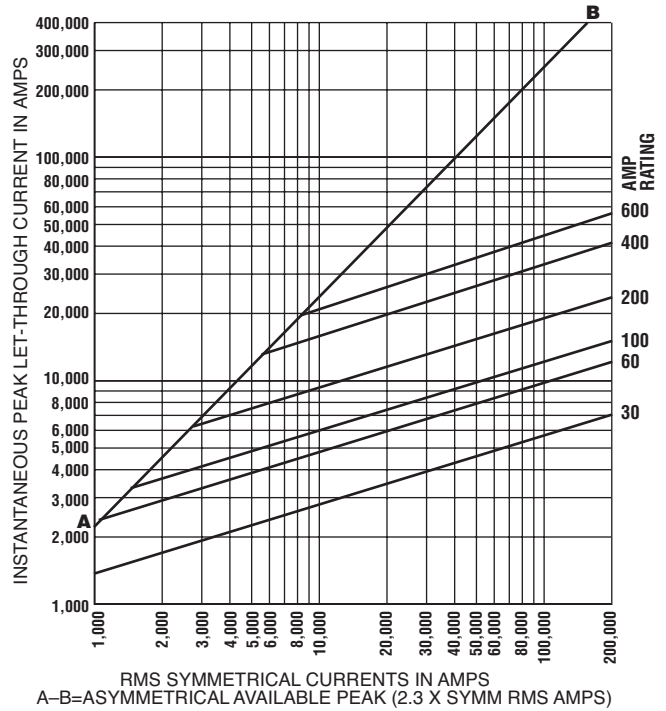

*Curves test data obtained at 15% short-circuit power factor when possible.

Current Limitation Tables**


LENRK RMS & Peak Let-Through Currents (kA)

Available Fault current RMS Amps	Apparent Effective Let-Through Amps (kA)											
	30		60		100		200		400		600	
	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p
1,000	1	1	1	2	1	2	1	2	1	2	1	2
2,000	1	2	1	3	2	4	2	5	2	5	2	5
3,000	1	2	1	3	2	4	3	6	3	7	3	7
5,000	1	2	2	4	2	5	3	7	5	12	5	12
10,000	1	3	2	4	2	6	4	9	7	15	9	21
15,000	1	3	2	5	3	6	4	10	7	17	10	23
20,000	1	3	2	6	3	7	5	11	8	19	11	25
25,000	1	3	3	6	3	7	5	12	9	20	12	27
30,000	2	3	3	6	3	8	5	12	9	21	13	29
35,000	2	4	3	7	4	8	6	13	10	22	13	30
40,000	2	4	3	7	4	9	6	13	10	23	13	31
50,000	2	4	3	7	4	9	6	14	10	24	14	33
60,000	2	4	3	8	4	10	7	15	11	26	15	35
70,000	2	4	3	8	4	10	7	16	12	27	16	36
80,000	2	5	4	8	5	11	7	16	12	28	17	38
90,000	2	5	4	9	5	11	7	17	13	29	17	39
100,000	2	5	4	9	5	11	8	18	13	30	17	40
150,000	2	6	4	10	5	13	8	19	16	36	20	46
200,000	3	6	5	11	6	14	9	21	18	42	22	50

LESRK RMS & Peak Let-Through Currents (kA)

Available Fault current RMS Amps	Apparent Effective Let-Through Amps (kA)											
	30		60		100		200		400		600	
	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p
1,000	1	1	1	2	1	2	1	2	1	2	1	2
2,000	1	2	1	3	2	4	2	4	2	4	2	4
3,000	1	2	1	3	2	4	3	6	3	7	3	7
5,000	1	2	2	4	2	5	3	7	5	12	5	12
10,000	1	3	2	5	3	6	4	9	7	16	9	21
15,000	1	3	2	5	3	7	5	11	8	18	10	24
20,000	1	3	3	6	3	7	5	12	8	19	11	26
25,000	2	4	3	6	3	8	5	12	9	21	12	28
30,000	2	4	3	6	4	8	6	13	10	22	13	30
35,000	2	4	3	7	4	9	6	14	10	23	13	31
40,000	2	4	3	7	4	9	6	14	10	24	14	32
50,000	2	5	3	8	4	10	7	15	11	26	15	35
60,000	2	5	3	8	4	10	7	16	12	28	16	37
70,000	2	5	4	8	5	11	7	17	13	29	17	39
80,000	2	5	4	9	5	11	8	18	13	30	17	40
90,000	2	5	4	9	5	12	8	18	13	31	18	42
100,000	2	6	4	9	5	12	8	19	14	32	19	44
150,000	3	6	5	11	6	14	9	21	16	36	22	50
200,000	3	7	5	12	7	15	10	23	17	40	23	54

**"Apparent Let-Through Amps" values are read from "Peak Let-Through Current Curves" and the peak current value divided by 2.3 Asymmetry Factor.

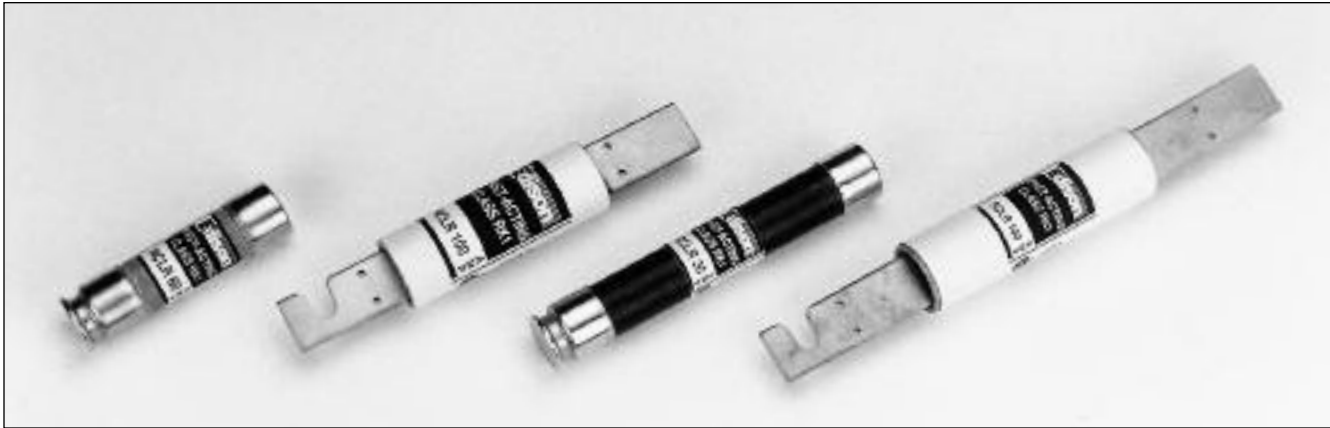

Catalog Number NCLR (1- 600A) 250Vac or Less
Catalog Number SCLR (1- 600A) 600Vac or Less

Amp Ratings					
NCLR					
1	10	35	80	175	400
3	12	40	90	200	450
4	15	45	100	225	500
5	20	50	110	250	600
6	25	60	125	300	—
8	30	70	150	350	—
SCLR					
1	8	30	70	175	450
2	10	35	80	225	500
3	12	40	90	250	600
4	15	45	100	300	—
5	20	50	110	350	—
6	25	60	125	400	—

NCLR/SCLR Specifications
Fast-Acting

Voltage Rating: NCLR - 250Vac, SCLR - 600Vac

Amp Rating: 1 - 600A

Interrupting Rating: 200kA RMS Symmetrical Amps

Current Limiting: RK1 Fuse

Agency Information:


UL Listed, Class RK1, Guide JDDZ, File E162363
CSA Certified per C22.2, No. 248.12

Self-Certified DC Ratings:


Voltage Rating: NCLR (1-600) 250Vdc
SCLR (1-600) 300Vdc

Interrupting Rating: NCLR/SCLR 10kA DC

Dimensions

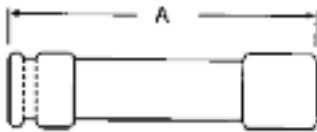

Ferrule Design—0 through 60 Amps

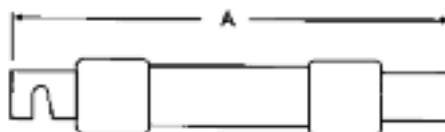

Knife Blade—70 through 600 Amps



Benefits:

- No intentional time-delay opens quickly on overload current.

Applications:

- Recommended for protection on non-inductive loads such as lighting and resistance heating circuits.
- Use to protect lower interrupting rating circuit breakers in series rated applications.

Recommended Fuse Blocks:

Refer to pages 145 and 146 in this catalog.


Recommended Upgrade:

LENRK/LESRK.

CROSS REFERENCE			
VOLTS	EDISON	MERSEN	LITTELFUSE
250	NCLR	A2KR	KLNR
600	SCLR	A6KR*	KLSR*

* Larger body size on blade type.

Dimensions

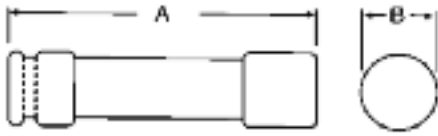

Ferrule Design—0 through 60 Amps



Knife Blade—70 through 600 Amps


Catalog Number	Amps	Overall Length - in	Max Diameter - in
		A	B
NCLR	0-30	2	0.56
	35-60	3	0.81
	70-100	5.88	1.10
	110-200	7.13	1.61
	225-400	8.63	2.38
	450-600	10.38	2.88
SCLR	0-30	5	0.81
	35-60	5.5	1.06
	70-100	7.88	1.11
	110-200	9.63	1.61
	225-400	11.63	2.36
	450-600	13.38	2.88

Application:

Edison NCLR/SCLR Class RK1 fast-acting fuses are recommended for general power distribution system use for main, feeder and branch circuits having a high percentage of non-inductive loads such as heating and lighting. NCLR/SCLR fuses are suitable for circuit breaker protection.* When NCLR/SCLR fast-acting fuses are used for inductive loads, the fuses usually require oversizing to override normal transient current surges of motors and transformers. Oversizing fuses usually increases fuse and equipment cost and reduces overcurrent protection. (For inductive loads, LENRK/LESRK fuses are recommended). NCLR/SCLR Class RK1 fast-acting fuses are physically interchangeable with other Class R fuses. They will replace Class K or Class H fuses in standard fuse clips.


*When used as recommended by a specific circuit breaker manufacturer for a specific application.

Average Time-Current Curves
Cat. No. NCLR (Amp) and SCLR (Amp)

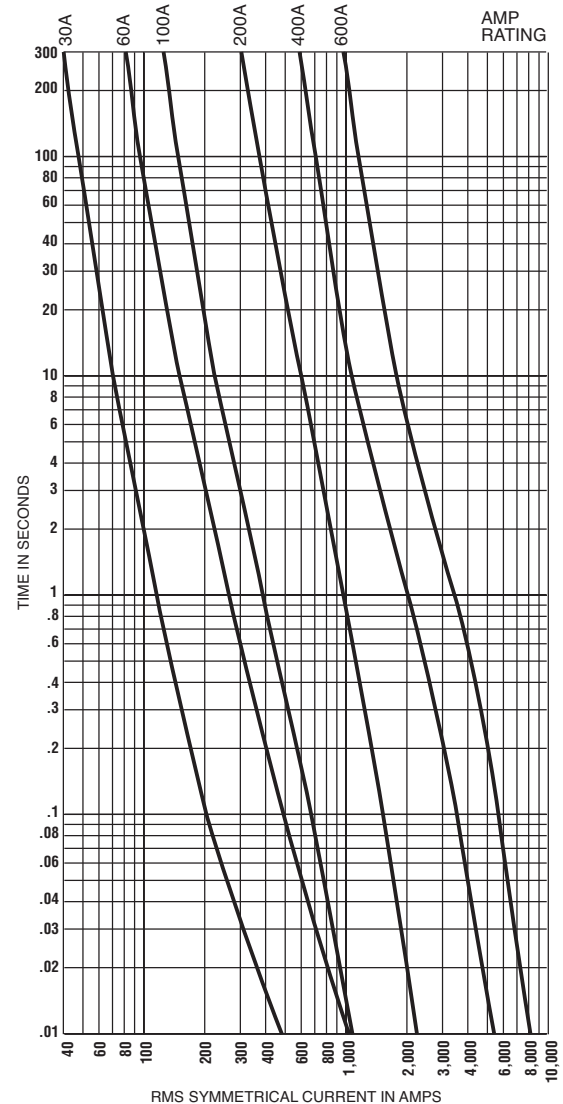


Peak Let-Through Current Curves*

NCLR

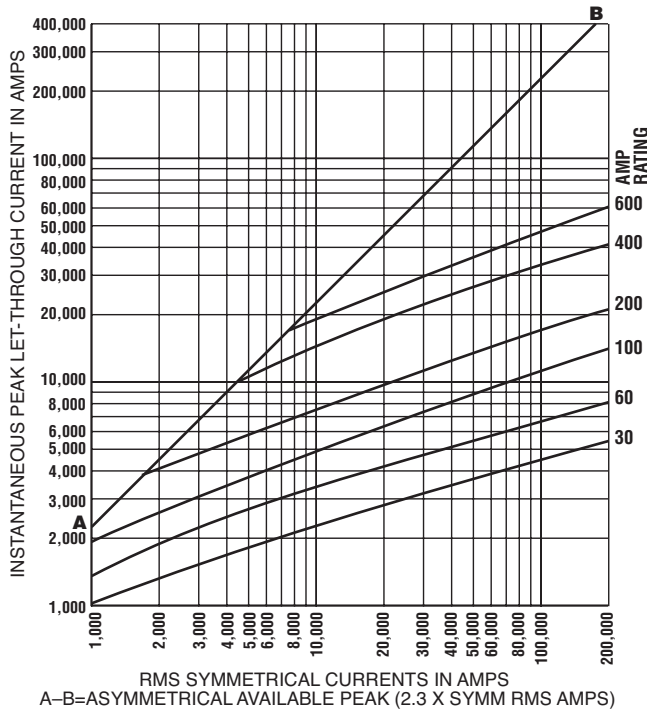

SCLR

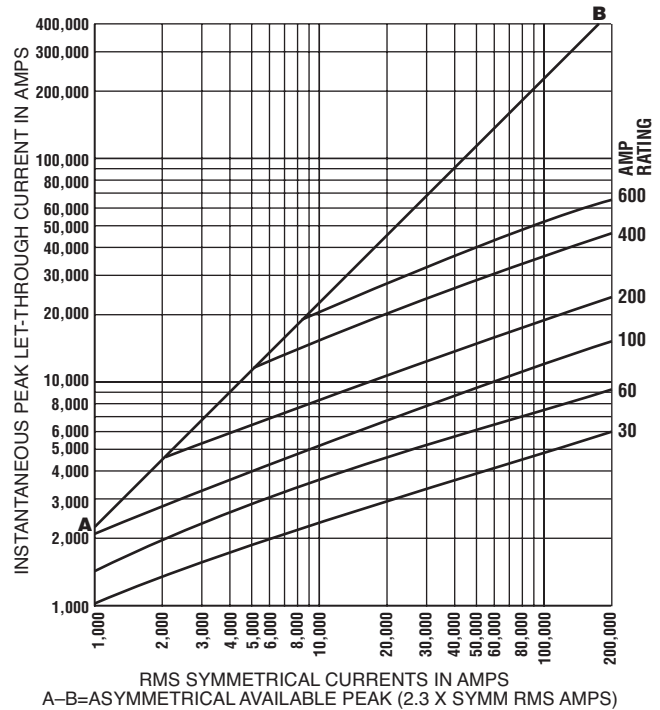

*Curves test data obtained at 15% short-circuit power factor when possible.

Current Limitation Tables**

NCLR

NCLR – RMS & Peak Let-Through Currents (kA)

Prosp. Short C.C.	Fuse Size											
	30		60		100		200		400		600	
	I_{RMS}	I_p	I_{RMS}	I_p	I_{RMS}	I_p	I_{RMS}	I_p	I_{RMS}	I_p	I_{RMS}	I_p
5,000	1	2	1	3	2	4	3	6	5	10	5	12
10,000	1	2	1	3	2	5	3	8	6	14	8	19
15,000	1	3	2	4	2	6	4	9	7	17	10	22
20,000	1	3	2	4	3	6	4	10	8	19	11	25
25,000	1	3	2	5	3	7	4	10	9	20	12	27
30,000	1	3	2	5	3	7	5	11	10	22	13	29
35,000	1	3	2	5	3	8	5	12	10	23	13	31
40,000	1	3	2	5	3	8	5	12	10	24	14	32
50,000	2	4	2	5	4	9	6	13	11	26	15	36
60,000	2	4	2	6	4	9	6	14	12	28	17	38
70,000	2	4	3	6	4	9	6	15	13	29	17	40
80,000	2	4	3	6	4	10	7	15	13	30	18	42
90,000	2	4	3	6	5	10	7	16	13	31	19	44
100,000	2	4	3	7	5	11	7	17	14	32	20	46
150,000	2	5	3	7	5	13	8	19	16	37	23	53
200,000	2	5	3	8	6	14	9	21	18	41	26	59

SCLR

SCLR – RMS & Peak Let-Through Currents (kA)

Prosp. Short C.C.	Fuse Size											
	30		60		100		200		400		600	
	I_{RMS}	I_p	I_{RMS}	I_p	I_{RMS}	I_p	I_{RMS}	I_p	I_{RMS}	I_p	I_{RMS}	I_p
5,000	1	2	1	3	2	4	3	6	5	12	5	12
10,000	1	2	2	4	2	5	4	8	7	15	9	20
15,000	1	3	2	4	3	6	4	10	8	18	11	24
20,000	1	3	2	5	3	7	5	11	9	20	12	28
25,000	1	3	2	5	3	7	5	12	10	22	13	31
30,000	1	3	2	5	3	8	5	13	10	24	14	33
35,000	2	4	2	5	4	8	6	13	11	25	15	35
40,000	2	4	2	6	4	9	6	14	11	26	16	37
50,000	2	4	3	6	4	9	6	14	12	28	17	40
60,000	2	4	3	6	4	10	7	15	13	30	19	43
70,000	2	4	3	7	5	10	7	16	14	32	20	45
80,000	2	4	3	7	5	11	7	17	14	33	21	48
90,000	2	5	3	7	5	12	8	18	15	35	22	50
100,000	2	5	3	7	5	12	8	19	16	36	23	52
150,000	2	5	4	8	6	14	9	21	18	41	26	60
200,000	3	6	4	9	7	15	10	23	20	46	29	66

**"Apparent Let-Through Amps" values are read from "Peak Let-Through Current Curves" and the peak current value divided by 2.3 Asymmetry Factor.



Catalog Number LCL (300 - 4000A) Time-Delay 600Vac or Less
Catalog Number LCU (601 - 6000A) Fast-Acting 600Vac or Less

Amp Ratings					
LCL					
300*	650	801	1350	1800	3500
400*	700	900	1400	2000	4000
500*	750	1000	1500	2500	—
601	800	1200	1600	3000	—
LCU					
601	800	1350	1800	3000	6000
650	1000	1500	2000	3500	—
700	1200	1600	2500	4000	—

* Not UL Listed (See note below).

LCL: Time-delay of 5 seconds minimum at 500% rated current allows closer sizing.

NOTE: LCL 300 - 500 amp fuses are physically the same as 800 amp size; Use in 800 amp switch where load current is not fully utilized and a smaller fuse amp size is desired. Also useful in new installations to allow for future upgrades in service.

LCL/LCU Specifications

LCL: Time-Delay
LCU: Fast-Acting

Voltage Rating: LCL - 600Vac, LCU - 600Vac

Amp Rating: LCL: 300 - 4000A
LCU: 601 - 6000A

Interrupting Rating: 200kA RMS Symmetrical Amps

Current Limiting: Class L Fuse

Agency Information:

UL Listed, Class L, Guide JDDZ, File E162363
CSA Certified HRC-L per C22.2, No. 248.10

Benefits:

- "O-ring" construction insures maximum current limiting ability.
- Silver plated micro-peened terminals.
- High strength melamine fuse tubes.

Applications:

- **LCL:** Recommended for AC power distribution system mains and large feeders.
- **LCU:** Recommended for non-inductive heating and lighting loads. Also suitable for protection of low interrupting rating circuit breakers.

Recommended Sizing:

LCL: 150% or more of motor full load current.


Recommended Upgrade:

None Available.


CROSS REFERENCE		
EDISON	MERSEN	LITTELFUSE
LCL	A4BY	KLP-C, KLLU
LCU	None	None

Average Time-Current Curves

Cat. No. LCL (Amp)

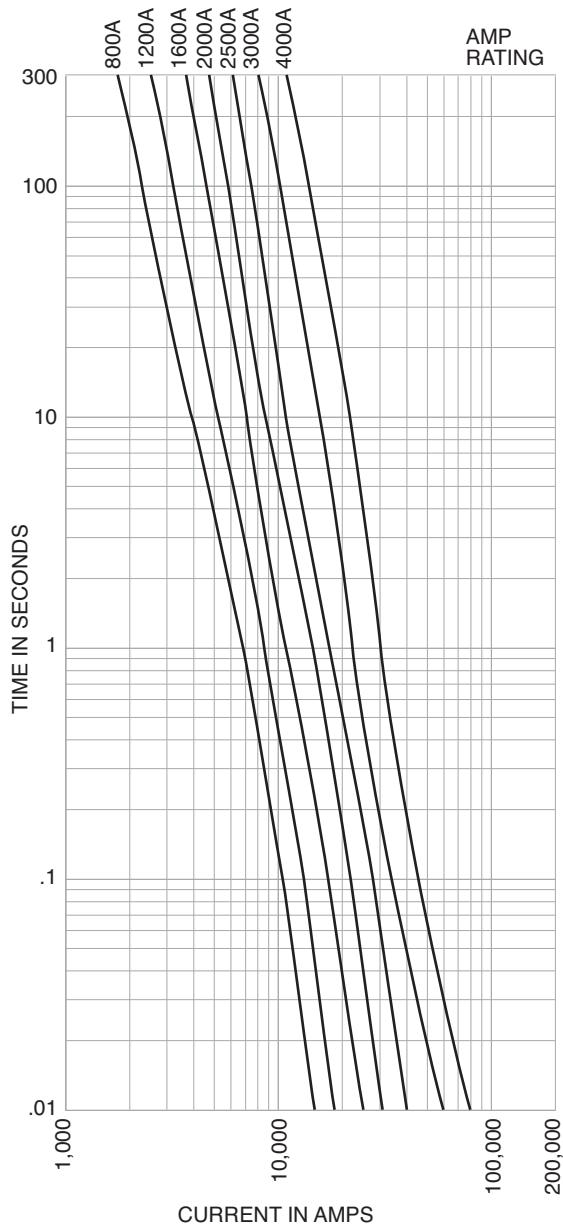


Cat. No. LCU (Amp)

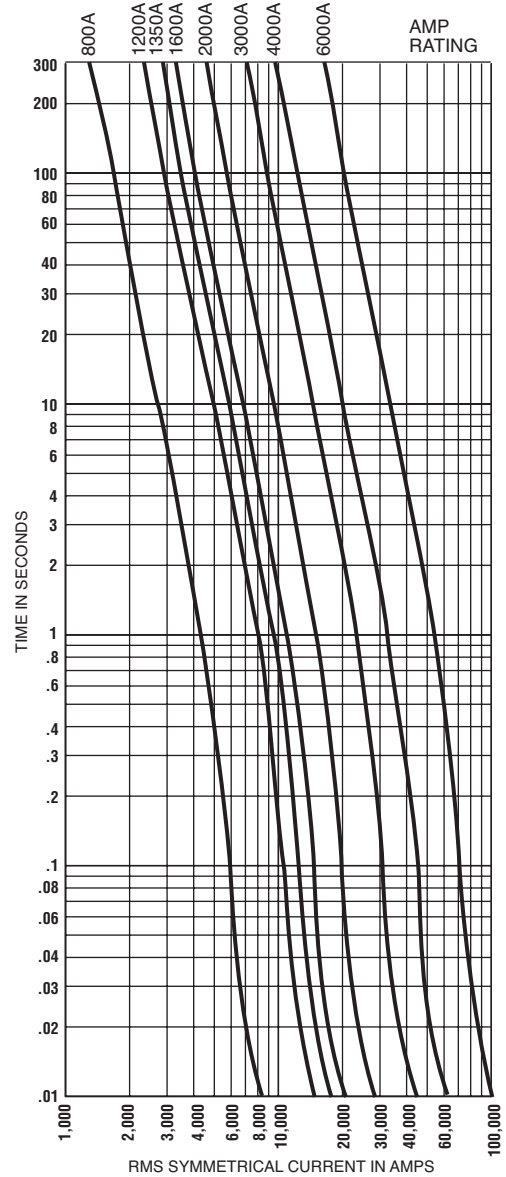


Peak Let-Through Current Curves*

LCL

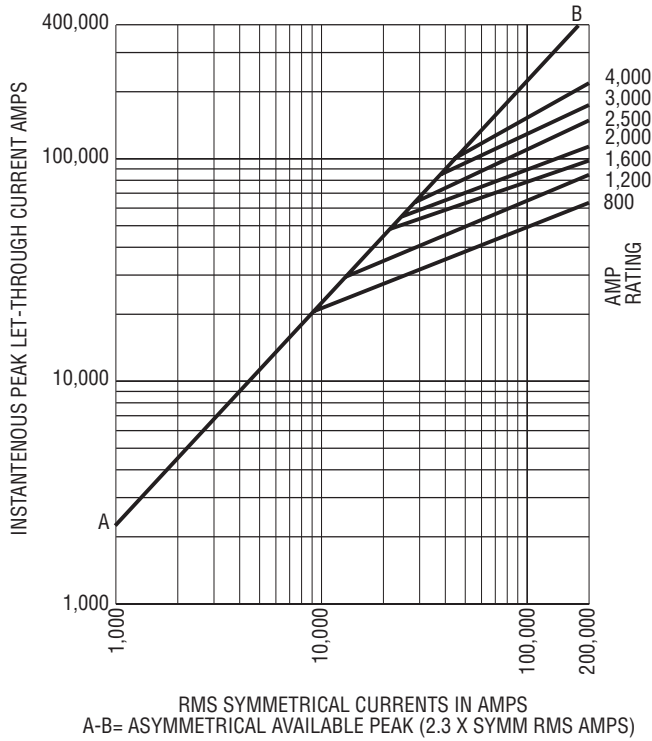

LCU

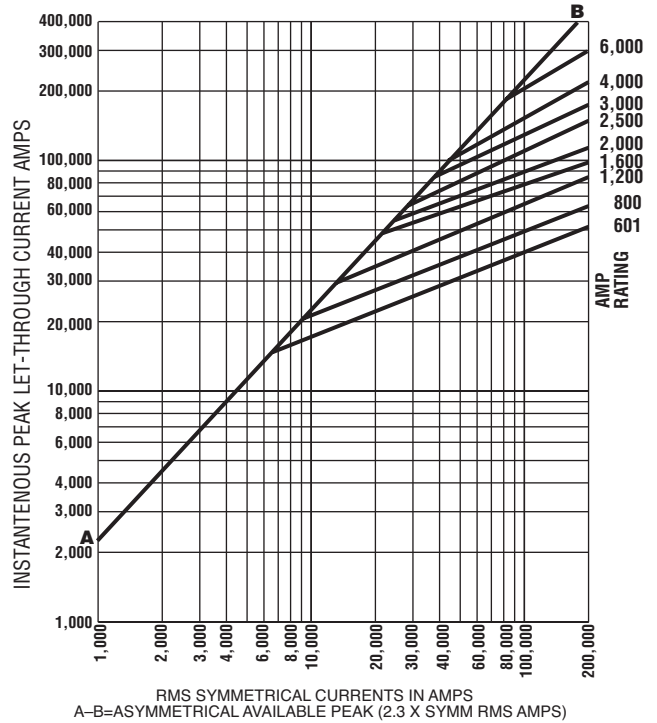

*Curves test data obtained at 15% short-circuit power factor when possible.

Current Limitation Tables**

LCL

Current-Limiting Effects

*Prosp. S.C.C.	Let-Through Current (Apparent RMS Symmetrical) Versus Fuse Ratings					
	800A	1200A	1600A	2000A	3000A	4000A
5,000	5,000	5,000	5,000	5,000	5,000	5,000
10,000	10,000	10,000	10,000	10,000	10,000	10,000
15,000	13,000	15,000	15,000	15,000	15,000	15,000
20,000	14,000	18,000	20,000	20,000	20,000	20,000
25,000	16,000	21,000	25,000	25,000	25,000	25,000
30,000	16,500	22,500	26,000	30,000	30,000	30,000
40,000	18,000	25,500	29,000	34,000	40,000	40,000
50,000	19,000	27,000	32,000	37,000	42,000	45,000
60,000	21,000	29,000	35,000	41,000	45,000	50,000
80,000	24,000	32,000	39,000	45,000	51,000	57,000
100,000	26,000	36,000	41,000	51,000	55,000	64,000
150,000	30,000	40,000	48,000	58,000	66,000	78,000
200,000	34,000	45,000	52,000	65,000	76,000	92,000

* RMS Symmetrical Amps Short-Circuit Current.
NOTE: Data derived from Current Limiting Curves.

LCU

Current-Limiting Effects

*Prosp. S.C.C.	Let-Through Current (Apparent RMS Symmetrical) Versus Fuse Ratings							
	800A	1200A	1600A	2000A	3000A	4000A	6000A	
5,000	5,000	5,000	5,000	5,000	5,000	5,000	5,000	
10,000	9,700	10,000	10,000	10,000	10,000	10,000	10,000	
15,000	11,500	13,000	15,000	15,000	15,000	15,000	15,000	
20,000	12,500	15,400	18,000	20,000	20,000	20,000	20,000	
25,000	14,000	16,000	21,000	25,000	25,000	25,000	25,000	
30,000	14,500	17,500	22,000	27,000	30,000	30,000	30,000	
35,000	15,000	18,000	24,000	28,000	35,000	35,000	35,000	
40,000	15,500	19,000	25,000	29,000	40,000	40,000	40,000	
50,000	16,000	21,000	26,000	32,000	44,000	48,000	50,000	
60,000	19,000	24,000	28,000	34,000	48,000	51,000	60,000	
80,000	20,000	26,000	31,000	36,000	52,000	60,000	80,000	
100,000	23,000	29,000	39,000	40,000	57,000	68,000	95,000	
150,000	27,000	34,000	40,000	47,000	70,000	79,000	115,000	
200,000	29,000	39,000	43,000	50,000	78,000	93,000	141,000	

* RMS Symmetrical Amps Short-Circuit Current.
NOTE: Data derived from Current Limiting Curves.

***"Apparent Let-Through Amps" values are read from "Peak Let-Through Current Curves" and the peak current value divided by 2.3 Asymmetry Factor.

General Application:

Edison Class L fuses, Catalog Numbers LCL time-delay or LCU fast acting are recommended for high capacity main, feeder or branch circuits in power distribution systems and for special applications such as system upgrading, install ahead of network protectors, etc. The choice of LCL or LCU depends on the extent of mixed inductive and non-inductive loads diversity. Apply LCL fuses for protection of large individual motor circuits. Size LCL fuses at 150% or more of the motor nameplate current rating by checking starting characteristics against minimum melt Time-Current Curve.

Class L Fuses Specification:


Install Class L Fuses in switches rated 601-6000 amps and in AMP RATINGS and "time-delay" or "fast-acting" types as shown on the plans. Installed and


spare "time-delay" fuses shall be Catalog Number LCL and "fast-acting" fuses shall have silver links and be Catalog Number LCU. Fuses shall be Edison fuses or equivalent submitted to the design engineer for approval 10 days prior to the project bid date.

Mounting of "Bolt-On" Fuses shall be made by installing stainless steel bolts of correct number, diameter and length*, stainless steel spring washers on each side of the bolt and stainless steel nuts. The nuts shall be tightened to the torque recommended by ASTM Standards for the bolt size used.

*Bolts shall have the largest diameter to fit fuse bolt holes and length to allow full nut thread engagement. Bolts shall be installed in each fuse mounting hole.

Class L Fuse Dimensions - inches

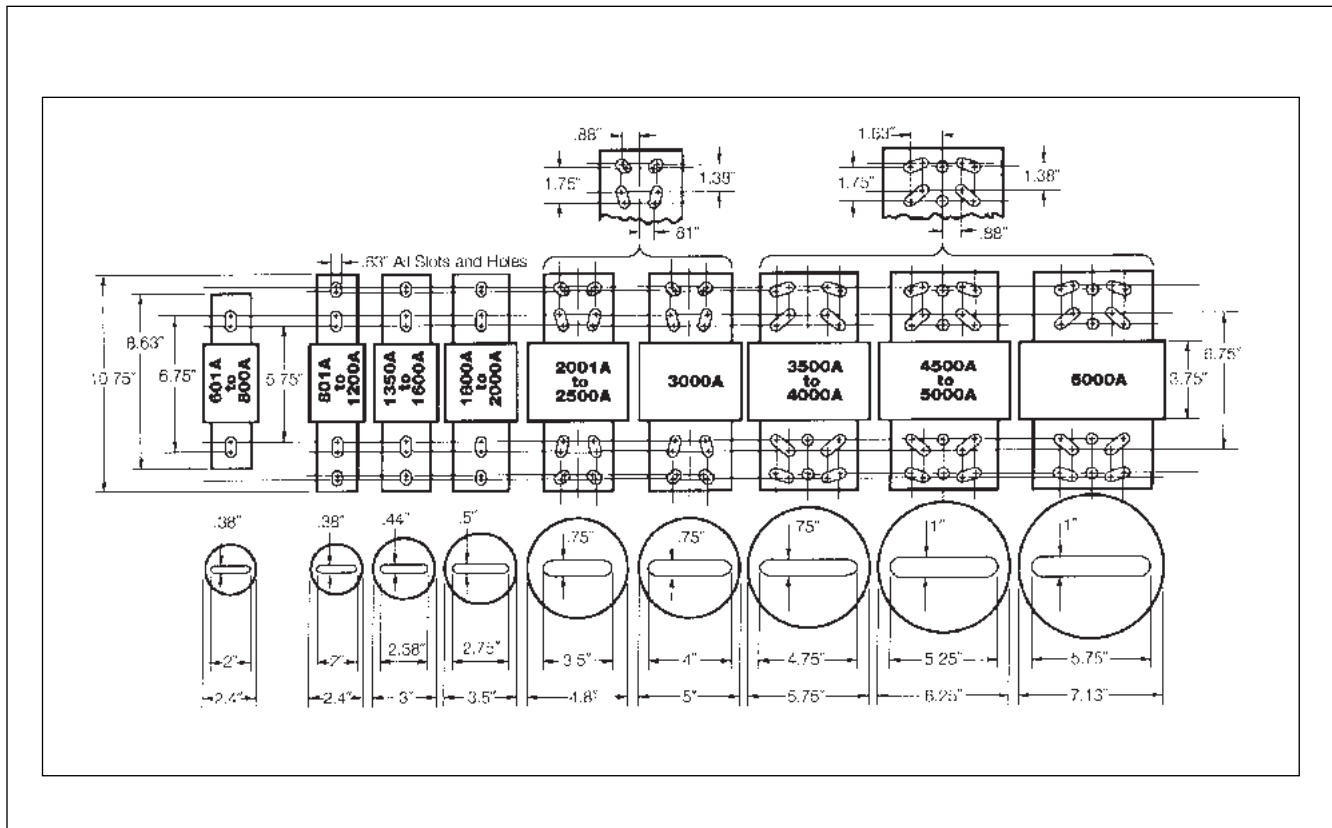

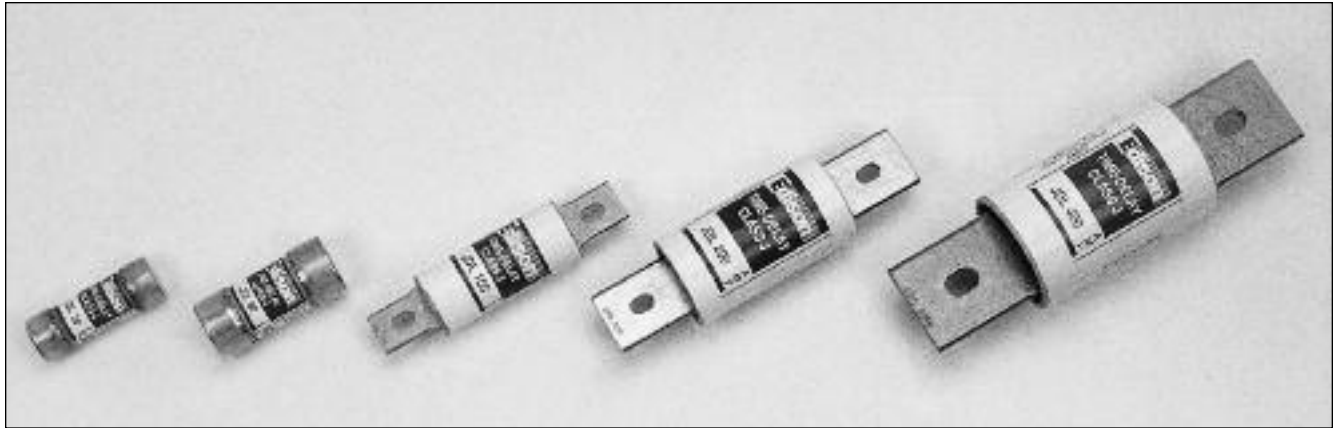

Catalog Number JDL (1 - 600A) 600Vac or Less

Amp Ratings					
JDL					
1	4	12	40	100	250
1.25	5	15	45	110	300
1.6	5.6	17.5	50	125	350
2	6	20	60	150	400
2.5	7	25	70	175	450
3	8	30	80	200	500
3.5	10	35	90	225	600

Edison JDL Class J fuses are among the most current limiting time-delay fuses available. Their small physical size and high performance characteristics makes Class J fuses ideal for any space-limited application.

JDL Specifications

Dual-Element, Time-Delay

Voltage Rating: JDL - 600Vac
300Vdc

Amp Rating: 1 - 600A

Interrupting Rating: 200kA RMS Symmetrical Amps
100kA DC

Current Limiting: Class J Fuse

Agency Information:

UL Listed, Class J, Guide JDDZ, File E162363
CSA Certified per C22.2, No. 248.8

Benefits:

- Space saving dimensions vs. Class R.
- Dual-Element construction provides superior time-delay to pass harmless motor or transformer surges.
- High performance with fatigue - free cycling capabilities.
- Extremely current limiting.

Applications:

- Recommended for Type 2 "No Damage" protection of IEC style motor starters and contactors.
- Use to protect lower interrupting rating circuit breakers.
- All general purpose circuits with inductive (high inrush) loads, including motor and motor branch circuits, and transformer circuits. Also suitable for lighting loads.

Recommend Fuse Blocks:

Refer to page 129 in this catalog.


Recommend Upgrade:

None.

CROSS REFERENCE		
EDISON	MERSEN	LITTELFUSE
JDL	AJT	JTD


Average Time-Current Curve

Cat. No. JDL (Amp)

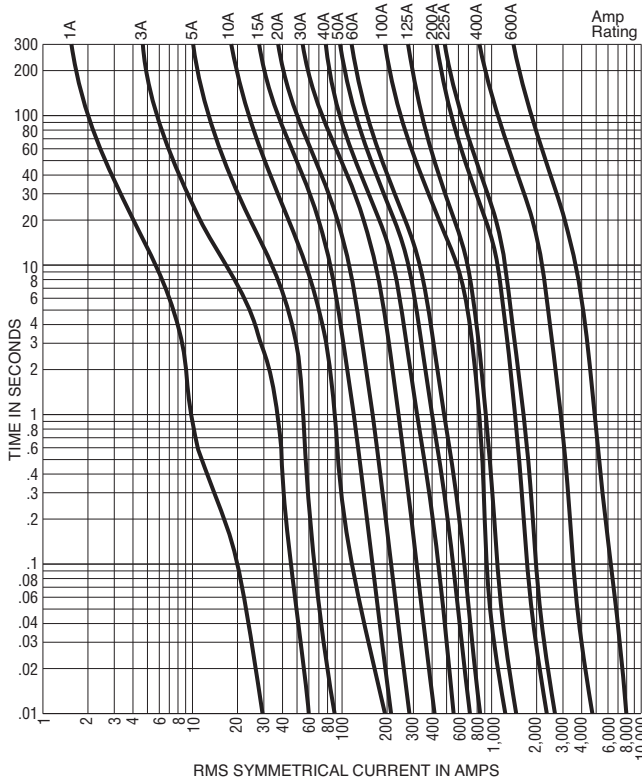

Peak Let-Through Current Curves


Cat. No. JDL (Amp)

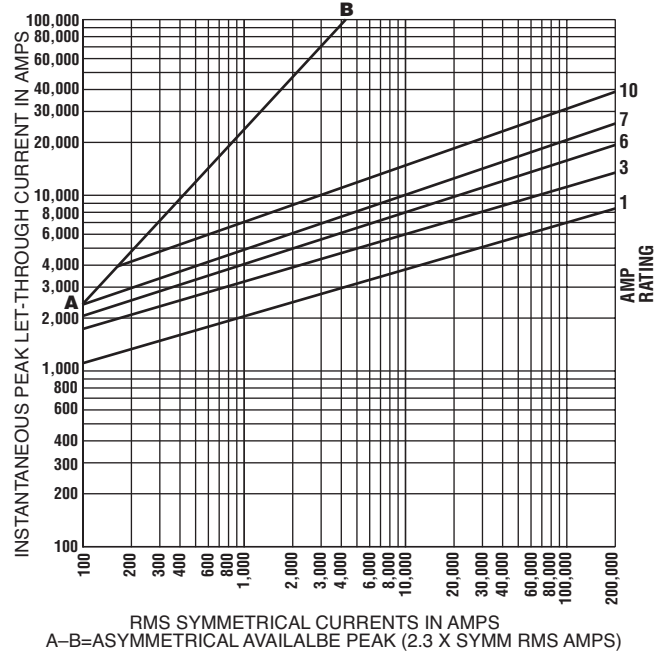


Current-Limiting Effects

*Prop. S.C.C.	Let-Through Current (Apparent RMS Symmetrical)						
	JDL Fuse Ratings						
	15A	30A	60A	100A	200A	400A	600A
1,000	270	470	750	—	—	—	—
3,000	370	670	1,130	1,640	2,360	—	—
5,000	450	800	1,420	1,910	2,760	4,400	—
10,000	550	1,000	1,730	2,450	3,520	5,540	8,000
15,000	625	1,220	1,890	2,850	4,000	6,420	9,000
20,000	700	1,330	2,120	3,090	4,400	7,000	10,000
25,000	750	1,440	2,250	3,400	5,000	7,500	11,100
30,000	800	1,530	2,370	3,650	5,140	8,000	11,800
35,000	820	1,600	2,580	3,780	5,430	8,330	12,500
40,000	900	1,640	2,670	4,000	5,640	9,000	13,270
50,000	925	1,760	2,790	4,470	6,000	9,380	13,820
60,000	1,000	1,850	3,000	4,670	6,420	10,000	15,000
80,000	1,160	2,000	3,220	5,000	7,400	11,270	16,000
100,000	1,220	2,150	3,520	5,360	7,950	12,180	17,270
150,000	1,400	2,460	4,000	6,170	9,000	14,360	19,270
200,000	1,560	2,640	4,450	7,000	10,000	15,820	20,600

*RMS Symmetrical Amps Short-Circuit Current.
NOTE: Data derived from Current Limiting Curves.

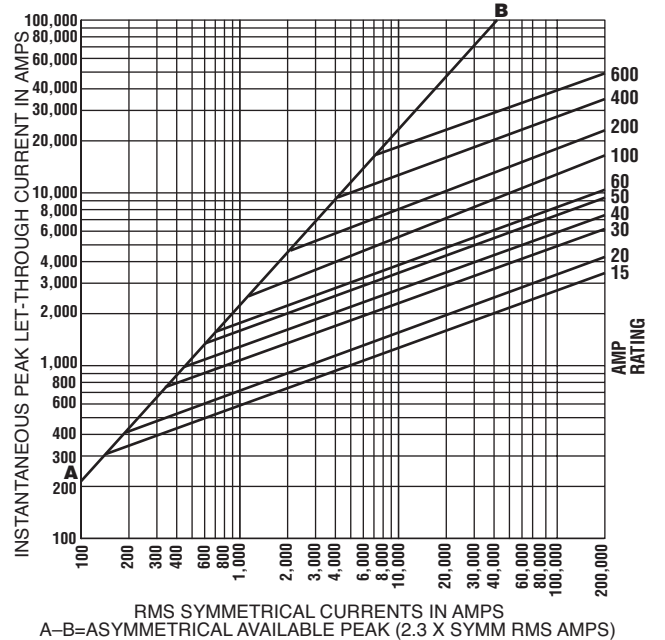

Dimensions
Refer to JFL Section on page 21.

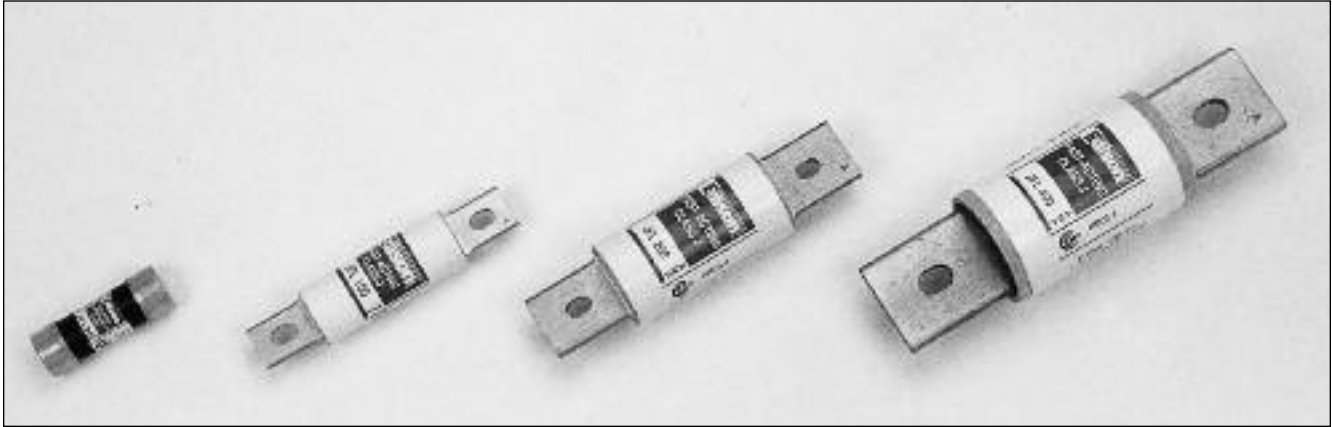

Catalog Number JFL (1 - 600A) 600Vac or Less

Amp Ratings					
JFL					
1	8	30	70	150	350
2	10	35	80	175	400
3	12	40	90	200	450
4	15	45	100	225	500
5	20	50	110	250	600
6	25	60	125	300	—

Edison JFL Class J fuses are among the most current limiting fuses available. Their small physical size and high performance characteristics makes Class J fuses ideal for any space - limited application.

Edison JFL fuses are best suited for the protection of non-inductive loads such as resistive heating, and lighting circuits.

JFL Specifications

Fast-Acting

Voltage Rating: JFL - 600Vac

Amp Rating: 1 - 600A

Interrupting Rating: 200kA RMS Symmetrical Amps

Current Limiting: Class J Fuse

Agency Information:

UL Listed, Class J, Guide JDDZ, File E162363
CSA Certified per C22.2, No. 248.8

Benefits:

- Space saving dimensions vs. Class R.
- Fast-acting design permits quick response for both overloads and shorts.
- Extremely current-limiting.

Applications:

- Recommended for protection of non-inductive loads, such as lighting and resistance heating circuits.
- For motor applications, refer to Edison JDL.

Recommended Fuse Blocks:


Refer to page 148 in this catalog.

Recommended Upgrade:

JDL.


CROSS REFERENCE		
EDISON	MERSEN	LITTELFUSE
JFL	A4J	JLS

Cat No. JFL and JDL Dimensions - inches

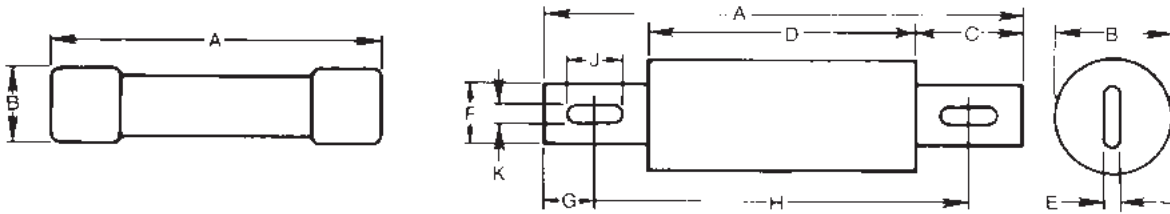

Amp Rating Range	Overall Length A	Max. Dia. B	Blade Length C	Barrel Length D	Blade Thickness E	Blade Width F	Mounting Hole Spacing				
							G	H	J	K	
1-30	2-1/4	13/16	-	-	-	-	-	-	-	-	-
35-60	2-3/8	1-1/16	-	-	-	-	-	-	-	-	-
70-100	4-5/8	1-1/18	1	2-5/8	1/8	3/4	1/2	3-5/8	3/8	9/32	
110-200	5-3/4	1-5/8	1-3/8	3	3/16	1-1/8	11/16	4-3/8	3/8	9/32	
225-400	7-1/8	2-1/8	1-7/8	3-3/8	1/4	1-5/8	15/16	5-1/4	17/32	13/32	
450-600	8	2-5/8	2-1/8	3-3/4	3/8	2	1	6	11/16	17/32	


Average Time-Current Curve
 Cat. No. JFL (Amp)

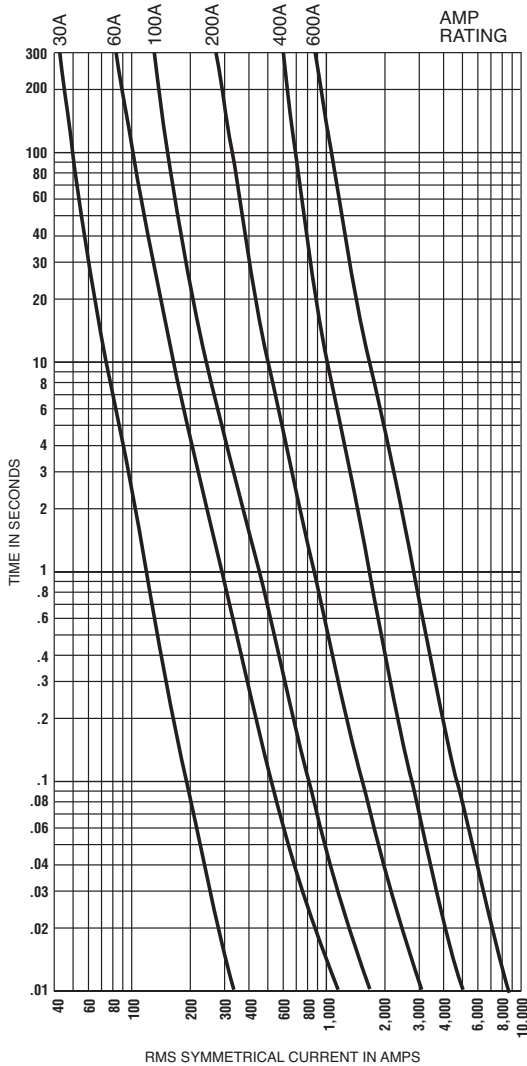

Current Limitation Table*
 JFL

Prosp. Short S.C.C.	Fuse Size											
	30		60		100		200		400		600	
	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p	I _{RMS}	I _p
5,000	1	2	1	3	2	4	3	7	4	10	5	12
10,000	1	3	2	4	3	6	4	9	6	13	9	19
15,000	1	3	2	4	3	6	4	10	7	15	10	22
20,000	1	3	2	5	3	7	5	12	8	18	11	25
25,000	2	4	3	6	3	8	6	13	9	19	12	28
30,000	2	4	3	6	3	8	6	13	9	20	13	30
35,000	2	4	3	7	4	9	6	14	9	21	13	30
40,000	2	4	3	7	4	9	7	15	10	22	14	32
50,000	2	5	3	8	4	10	7	16	10	23	15	35
60,000	2	5	3	8	5	11	7	17	11	25	16	37
70,000	2	5	3	8	5	12	8	18	11	25	17	39
80,000	2	5	3	8	5	12	8	18	12	28	17	39
90,000	2	5	4	9	6	13	9	19	13	29	18	41
100,000	2	5	4	9	6	13	9	19	13	30	18	42
150,000	2	5	5	11	6	14	9	21	14	33	22	50
200,000	3	6	5	12	7	15	10	22	16	37	24	55

Peak Let-Through Current Curves**

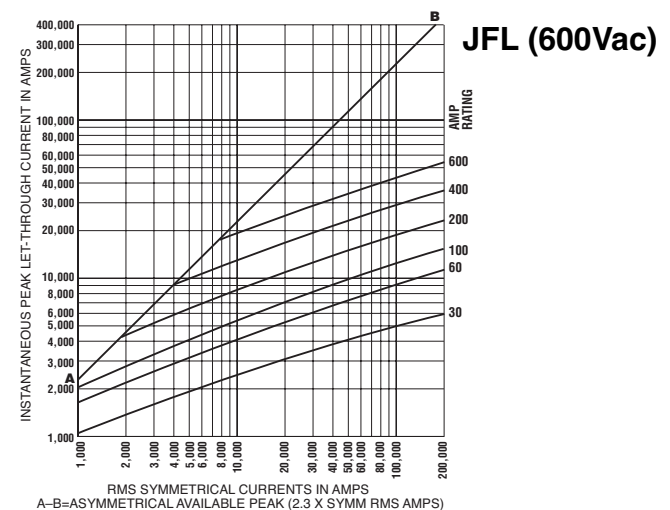

* "Apparent Let-Through Amps" values are read from "Peak Let-Through Current Curves" and the peak current value divided by 2.3 Asymmetry Factor.

** Curves test data obtained at 15% short-circuit power factor when possible.