



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features:

- Low optical insertion loss
- Cost-effective CWDM technology
- Mux/Demux four wavelengths
- Monitor port available
- Dual LC connectors for a simple pluggable interface
- Color coded for easy installation
- Reliable passive WDM technology
- Scalable for ring networks
- Low-profile modular design
- Fits in 1RU 19" rack mount chassis
- RoHS compliant

CWDM OADM-4 w/TAP Plug-in Module



OADM-4w/TAP plug-in module is a passive optical add/drop multiplexer designed for metro access applications that represents the state of the art in fiber optics design. The OADM module adds and drops four CWDM wavelength channels from network traffic and passes the other channels. These four-channel OADMs are transparent to the 1310nm wavelength and include a monitor port to provide customers capability to monitor and troubleshoot networks. Finisar's unique CWDM design maps the channels into two-fiber paths, going in opposite directions into a network (east/west).

Added/dropped channels can be connected to any of Finisar's CWDM transceivers on the equipment side. A grid of eight CWDM wavelengths is available from Finisar. The OADM module plugs into one half of a 1RU, 19" rack mount chassis for simple installation and modularity. This Chassis based system allows a network equipment manufacturer to add WDM capability to any existing networks with simple pluggable interface.

The equipment ports of the OADM-4w/TAP plug-in module are color coded to match the wavelength of Finisar's CWDM transceiver to simplify installation and troubleshooting without having to remove the transceivers from the local equipment. This OADM module delivers dramatic cost savings to network equipment manufacturers, enabling them to develop metro access systems that are lower in cost, easier to provision and simpler to operate.

OADM-4 w/TAP Plug-in Module

Specifications

Mechanical

Dimensions:
8.3" x 1.7" x 10.4",
210mm x 43mm x 264mm,
plug-in for 1RU rack-mount

Connectors:

- Network side: 2 dual LC/PC
- Equipment side: 4 dual LC/PC
- Monitor side: 2 dual LC/PC

Optical

**Center wavelengths:
(2 versions):**

OADM-W/TAP-4B-1 Plug-in

- 1471 nm
- 1491 nm
- 1511 nm
- 1531 nm

OADM-W/TAP-4B-2 Plug-in

- 1551 nm
- 1571 nm
- 1591 nm
- 1611 nm

All versions is transparent at 1260-1360 nm

Directivity:

≥ 50 dB

Return Loss:

≥ 45 dB

Passband Ripple:

≤ 0.5dB

PDL:

≤ 0.2dB

PMD:

≤ 0.2ps

Environmental:

- Operating -5 to 70°C

- Relative humidity:

10 to 85%

Non-condensing

- Storage - 40 to 85°C

OADM-4 W/TAP Plug-in Module Parameter Specifications

Passband	Max Insertion Loss (dB)				Min Isolation (dB)			Max Insertion Loss(dB) (Monitor Port)
	Add	Drop	Pass (1550)	Pass (1310)	Add	Drop	Pass	All Ports
Center wavelength +/- 6.5 nm	1.8	1.8	2.1	2.1	30	30	15	23

Note: Connector loss included.

Front Panel


FWSF-OADM-W/TAP-4B-1-LC Front Panel



FWSF-OADM-W/TAP-4B-2-LC Front Panel



Dimensions (Unit: inch)

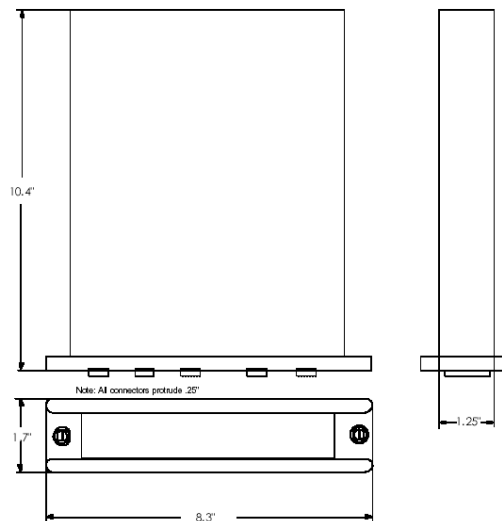

Ordering Information

Part Number Description

FWSF-OADM-W/TAP-4B-1-LC	4 Wavelengths Add/Drop MUX (1471, 1491, 1511, 1531) with TAP port Plug-in Module for FWSF-CHASSIS-2, LC connectors
FWSF-OADM-W/TAP-4B-2-LC	4 Wavelengths Add/Drop MUX (1551, 1571, 1591, 16131) with TAP port Plug-in Module for FWSF-CHASSIS-2, LC connectors