



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features:

- Low optical insertion loss
- Mux sixteen Wavelengths
- SC connectors (LC version available)
- Reliable passive WDM technology
- Scales easily for ring networks
- Low-profile modular design
- Fits in 1RU 19" rack mount chassis
- RoHS compliant

16 Channels 100GHz DWDM MUX Plug-in Module



Sixteen channel FWSFDMUXDwxyxy DWDM Plug-in module is a passive optical multiplexer designed for metro access applications that represent the state of the art in fiber optics design. This MUX module multiplexes sixteen DWDM wavelengths of 100GHz channel spacing into a ring or point-to-point network.

The MUX module plugs into one half of a 1RU, 19" rack mount chassis for simple installation and modularity. This chassis based system offers network equipment manufacturers a more scalable and higher-density solution to add DWDM capability to their existing and new networks with simple pluggable interface.

Finisar's DWDM product delivers dramatic cost savings to network equipment manufacturers, enabling them to develop metro access systems that are lower in cost, easier to provision and simpler to operate.

FWSFMUXDwxyxy Plug-in Module

Product selection

FWSFMUXDwxyxy

w	Channel number (w=16 channels)
xx	The first channel ID (see below table channel wavelength)
yy	The last channel ID (see below table channel wavelength)

Channel ID ("xx"/"yy")	Center Wavelength (nm)	Channel ID ("xx"/"yy")	Center Wavelength (nm)	Channel ID ("xx"/"yy")	Center Wavelength (nm)
61	1528.773	40	1545.322	20	1561.419
60	1529.553	39	1546.119	19	1562.233
59	1530.334	38	1546.917	18	1563.047
58	1531.116	37	1547.715	17	1563.863
57	1531.898	36	1548.515	16	1564.679
56	1532.681	35	1549.315	15	1565.496
55	1533.465	34	1550.116	14	1566.314
54	1534.250	33	1550.918	13	1567.133
53	1535.036	32	1551.721	12	1567.952
52	1535.822	31	1552.524	11	1568.773
51	1536.609	30	1553.329	10	1569.594
50	1537.397	29	1554.134	09	1570.416
49	1538.186	28	1554.940	08	1571.239
48	1538.976	27	1555.747	07	1572.063
47	1539.766	26	1556.555	06	1572.888
46	1540.557	25	1557.363	05	1573.714
45	1541.349	24	1558.173	04	1574.540
44	1542.142	23	1558.983	03	1575.368
43	1542.936	22	1559.794	02	1576.196
42	1543.730	21	1560.606	01	1577.025
41	1544.526				

For example: **FWSFMUXD162136** – 16 channels, from CH21 to CH36, 100 GHz DWDM MUX plug-in modules, SC connectors

Specifications

Mechanical

Dimensions:

8.3" x 1.7" x 10.4",
210mm x 43mm x 264mm,
plug-in for 1RU rack-mount

Connectors:

FWSFMUXDwxyy
• Network side: 1 simplex SC/PC
• Equipment side: 8 dual SC/PC


Environmental:

- Operating -5 to 70°C
- Relative humidity:
10 to 85%, non-condensing
- Storage - 40 to 85°C

FWSFMUXDwxyy Parameter Specifications (connector loss included)

Parameter		Specifications	Unit
Center Wavelength	-	ITU Grid Channels	nm
Channel Spacing	-	100	GHz
Channel Pass band	-	ITU± 0.11	nm
Pass Band Insertion Loss	Max	6.0	dB
Pass Band Ripple	Max	0.4	dB
Adjacent Channel Isolation (Mux)	Min	15	dB
Non- Adjacent Channel Isolation (Mux)	Min	15	dB
Optical Return Loss	Min	45	dB
Directivity	Min	50	dB
Polarization Dependent Loss	Max	0.2	dB
Polarization Mode Dispersion	Max	0.2	ps
Optical Power Handling	Max	500	mW

Front Panel (Channel description is only for example)

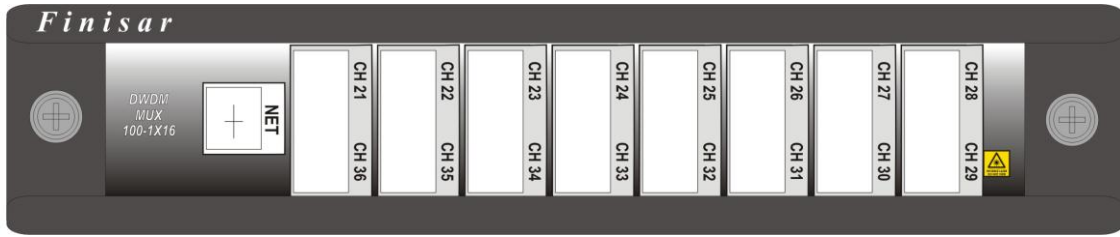

Dimensions (Unit: inch)

