



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features:

- Low optical insertion loss
- Add/Drop one DWDM wavelength
- SC connectors (LC version available)
- Reliable passive WDM technology
- Scalable for ring networks
- Low-profile modular design
- Fits in 1RU 19" rack mount chassis
- RoHS compliant

1 Channel 100GHz DWDM OADM Plug-in Module



One channel FWSFOADM1xxyy DWDM plug-in module is a passive optical add/drop multiplexer designed for metro access applications that represent the state of the art in fiber optics design. Finisar's unique one channel DWDM design maps one pair of add/drop channels of same wavelength with 100GHz channel spacing into two-fiber paths, going in opposite directions into a network (east/west).

The OADM module plugs into one half of a 1RU, 19" rack mount chassis for simple installation and modularity. This chassis based system offers network equipment manufacturers a more scalable and higher-density solution to add WDM capability to their existing and new networks with simple pluggable interface.

Finisar's OADM product delivers dramatic cost savings to network equipment manufacturers, enabling them to develop metro access systems that are lower in cost, easier to provision and simpler to operate.

FWSFOADMwxyy Plug-in Module

Product selection

FWSFOADMwxyy

w	Channel number (w=1 channel)
xx	The first channel ID (see below table channel wavelength)
yy	The last channel ID (see below table channel wavelength)

Channel ID ("xx"/"yy")	Center Wavelength (nm)	Channel ID ("xx"/"yy")	Center Wavelength (nm)	Channel ID ("xx"/"yy")	Center Wavelength (nm)
61	1528.773	40	1545.322	20	1561.419
60	1529.553	39	1546.119	19	1562.233
59	1530.334	38	1546.917	18	1563.047
58	1531.116	37	1547.715	17	1563.863
57	1531.898	36	1548.515	16	1564.679
56	1532.681	35	1549.315	15	1565.496
55	1533.465	34	1550.116	14	1566.314
54	1534.250	33	1550.918	13	1567.133
53	1535.036	32	1551.721	12	1567.952
52	1535.822	31	1552.524	11	1568.773
51	1536.609	30	1553.329	10	1569.594
50	1537.397	29	1554.134	09	1570.416
49	1538.186	28	1554.940	08	1571.239
48	1538.976	27	1555.747	07	1572.063
47	1539.766	26	1556.555	06	1572.888
46	1540.557	25	1557.363	05	1573.714
45	1541.349	24	1558.173	04	1574.540
44	1542.142	23	1558.983	03	1575.368
43	1542.936	22	1559.794	02	1576.196
42	1543.730	21	1560.606	01	1577.025
41	1544.526				

For example: **FWSFOADMD15858** – 1 channel, CH58, 100 GHz DWDM Add/Drop plug-in modules, SC connector

Specifications

Mechanical

Dimensions:

8.3" x 1.7" x 10.4",
210mm x 43mm x 264mm,
plug-in for 1RU rack-mount

Connectors:

FWSFOADMD1xxyy
• SC/PC


Environmental:

- Operating -5 to 70°C
- Relative humidity:
10 to 85%, non-condensing
- Storage - 40 to 85°C

FWSFOADMD1xxyy Parameter Specifications (connector loss included)

Parameter		Specifications	Unit
Center Wavelength		-	ITU Grid Channels
Channel Spacing		-	100
Channel Pass band		-	ITU± 0.11
Add and Drop Channel Insertion Loss		Max	1.3
Pass-Through Channel Insertion Loss		Max	1.4
Add and Drop Channel Ripple		Max	0.4
Adjacent Channel Isolation	Add side	Min	15
	Drop side	Min	30
Non- Adjacent Channel Isolation	Add side	Min	15
	Drop side	Min	40
Optical Return Loss		Min	45
Directivity		Min	50
Polarization Dependent Loss		Max	0.2
Polarization Mode Dispersion		Max	0.2
Optical Power Handling		Max	500

Front Panel (Channel description is only for example)

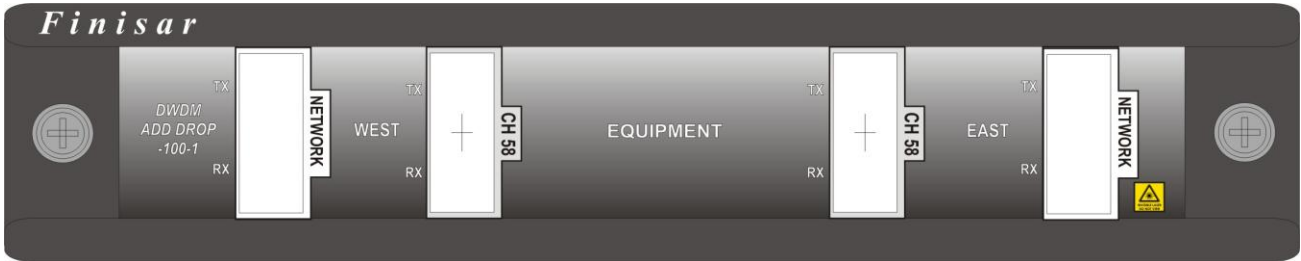

Dimensions (Unit: inch)

