



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



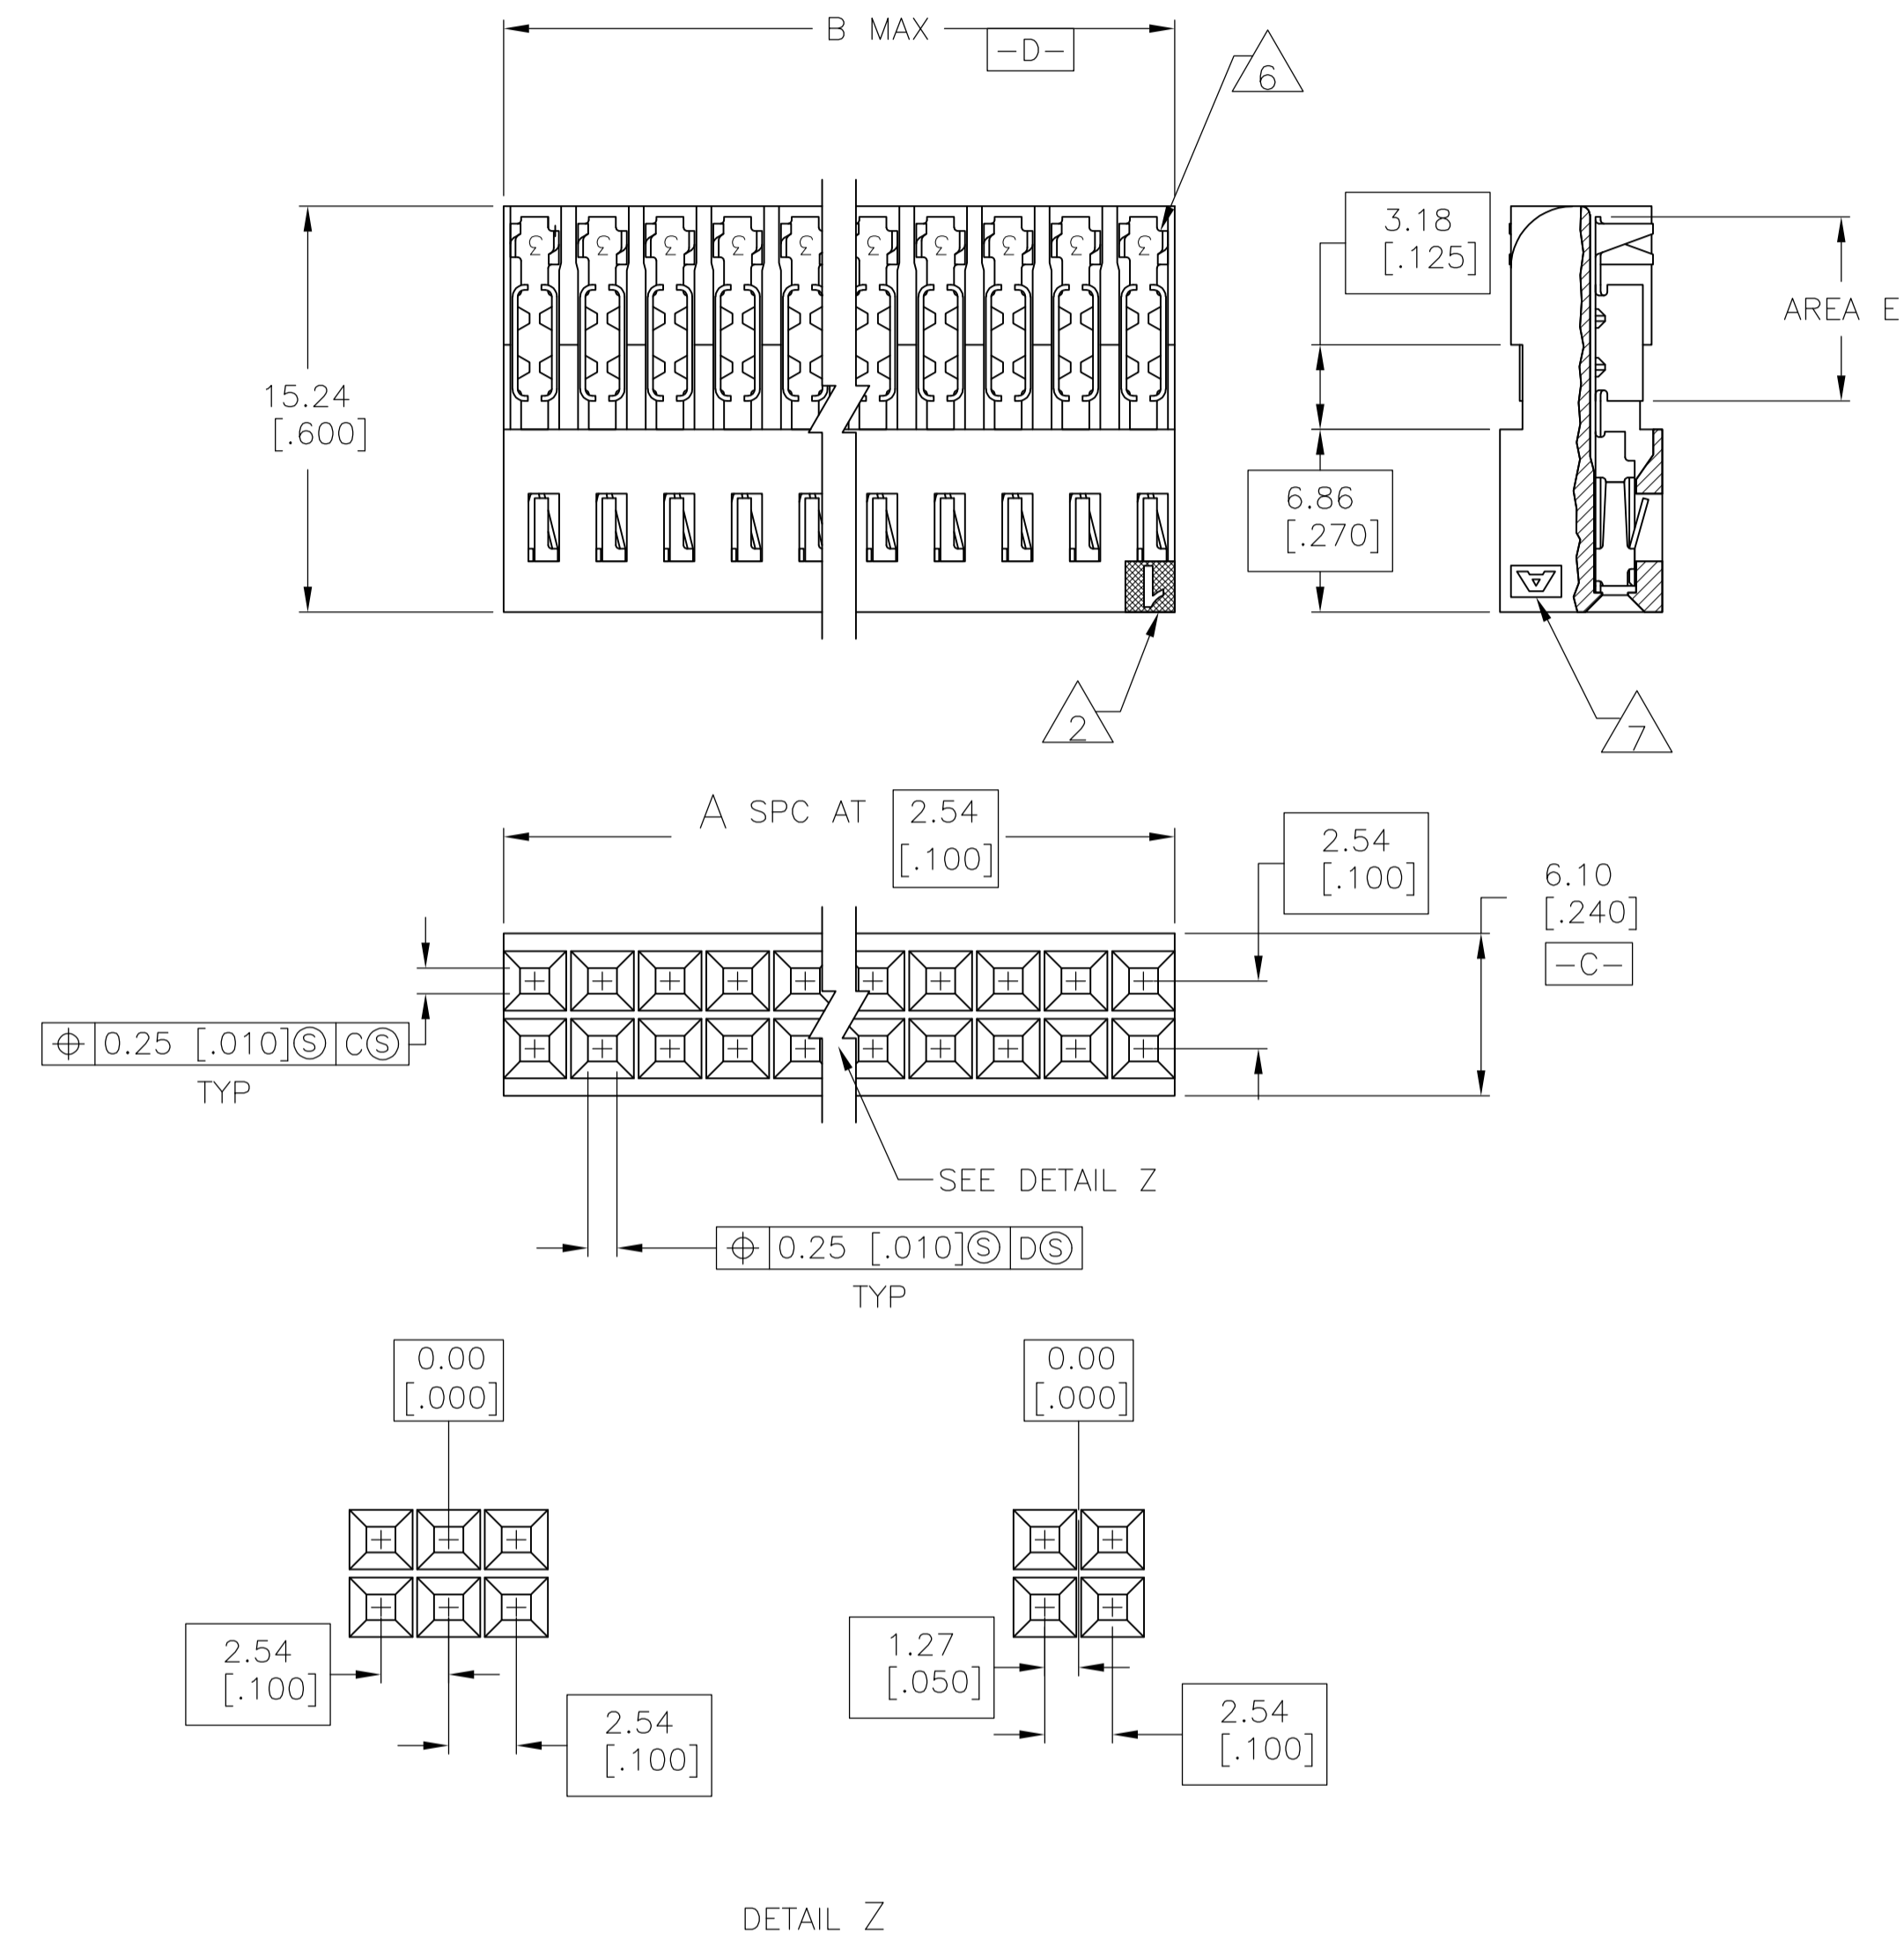

- 1 HOUSING: PBT, UL 94V-0 RATED, COLOR-BLACK
CONTACTS: COPPER ALLOY PER ASTM B103
- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] TIN-LEAD IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 4 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] TIN IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 5. USE WITH #20-#22 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 6 CONTACT IDENTIFICATION NUMBER "3" LOCATED IN THIS AREA.
- 7 AMP TRADEMARK (EITHER SIDE).
- 8 OBSOLETE PART NUMBER.
- 9 ROHS 2002/95/EC COMPLIANT.
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

FINISH	B	A	NO. OF POSN	PART NO.	FINISH	B	A	NO. OF POSN	PART NO.
3	91.44	35	72	8	3-102448-4				
3	88.90	34	70	8	3-102448-3				
3	86.36	33	68	8	3-102448-2				
3	83.82	32	66	8	3-102448-1				
3	81.28	31	64	8	3-102448-0				
3	78.74	30	62	8	2-102448-9				
3	76.20	29	60	8	2-102448-8				
3	73.66	28	58	8	2-102448-7				
3	71.12	27	56	8	2-102448-6				
3	68.58	26	54	8	2-102448-5				
3	66.04	25	52	8	2-102448-4				
3	63.50	24	50	8	2-102448-3				
3	60.96	23	48	8	2-102448-2				
3	58.42	22	46	8	2-102448-1				
3	55.88	21	44	8	2-102448-0				
3	53.34	20	42	8	1-102448-9				
3	50.80	19	40	8	1-102448-8				
3	48.26	18	38	8	1-102448-7				
3	45.72	17	36	8	1-102448-6				
3	43.18	16	34	8	1-102448-5				
3	40.64	15	32	8	1-102448-4				
3	38.10	14	30	8	1-102448-3				
3	35.56	13	28	8	1-102448-2				
3	33.02	12	26	8	1-102448-1				
3	30.48	11	24	8	1-102448-0				
3	27.94	10	22	8	102448-9				
3	25.40	9	20	8	102448-8				
3	22.86	8	18	8	102448-7				
3	20.32	7	16	8	102448-6				
3	17.78	6	14	8	102448-5				
3	15.24	5	12	8	102448-4				
3	12.70	4	10	8	102448-3				
3	10.16	3	8	8	102448-2				
3	7.62	2	6	8	102448-1				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	± .005
1. PLC	± .005
2. PLC	± .005
3. PLC	± .005
4. PLC	± .005
ANGLES	± .005

MATERIAL: 1 SEE TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

APPROVED: S. SHUEY 30DEC91

CHK: M. RIDER 06JAN92

NAME: R. FELLIX 07JAN92

PRODUCT SPEC: 108-25015

APPLICATION SPEC: 114-25032

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1

SHEET 1 OF 1

REV: R2

STE TE Connectivity

AMPMODU MT, RCPT ASSY, STANDARD PRESSURE CONTACTS FOR 20-22 AWG WIRE SIZE