



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION

- Part No. : **FXP14R.A.07.0100A**
- Product Name : FXP14 Hexa-Band Cellular Antenna
850/900/1700/1900/2100 MHz
GSM/GPRS/CDMA/HSPA/UMTS
- Feature : IPEX MHF Connector (U.FL compatible)
100 mm 1.37 Cable
70*20*.01 mm
Flexible
Peel and Stick Mounting
AntD© Shunt 10k Ohm Chip Resistor Inside
Cable and Connector Customizable
RoHS compliant

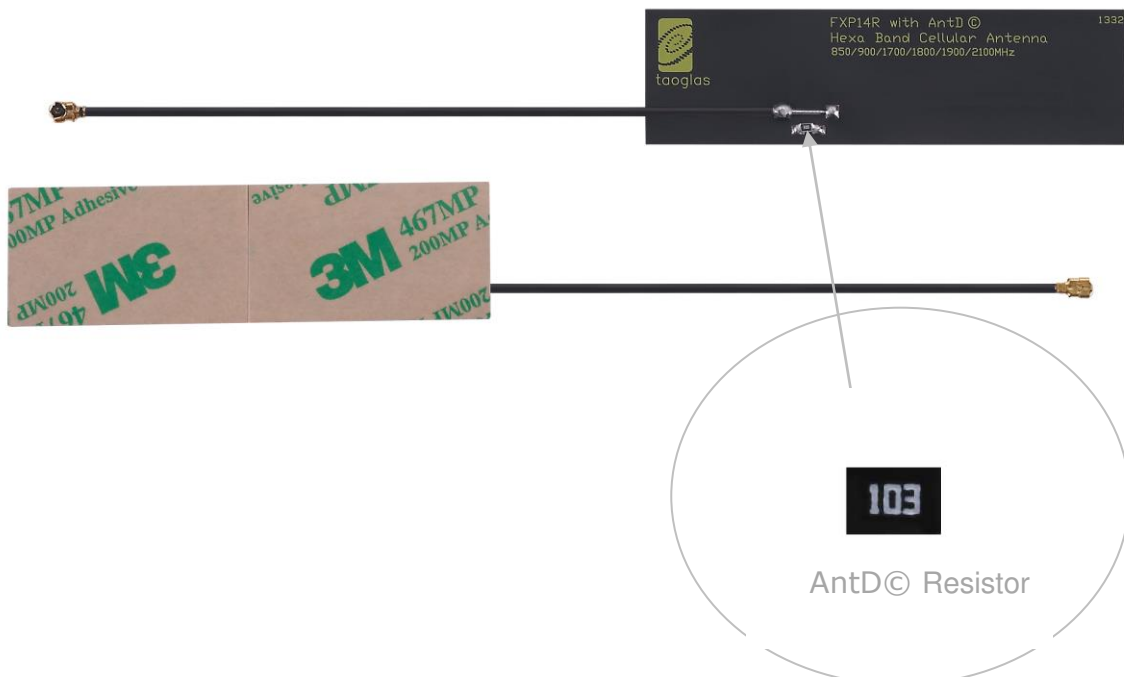

1. Introduction

The Taoglas FXP14R Hexa Band Cellular Antenna with Integrated AntD© Resistor covers all world-wide 2G/3G bands (850 / 900 / 1700 / 1800 / 1900 / 2100 MHz). Common applications are in GSM / CDMA / DCS / PCS / WCDMA / UMTS/ HSPA / GPRS / EDGE.

The antenna has been designed using a super thin flexible polymer substrate with a rectangular form-factor and cable connection for ease of installation. The antenna radiates well on different plastic materials and thickness. We have selected ABS plastic mounting with 2 mm of thickness as a baseline for testing. Best in class efficiency on lower and upper bands (above 40%) make it an ideal antenna for devices where space for onboard SMT cellular antennas is not available. The antenna is mounted via automotive quality 3M 467MP adhesive and has excellent reliability. The FXP14 has its own ground-plane, therefore it does not need to connect to the ground-plane of the main-board of the device for improved radiation efficiency.


Taoglas unique AntD© technology allows connected radio products to perform diagnostics on the antenna. This includes detection that the proper antenna is connected and that the connection isn't shorted or broken. Contact Taoglas engineering for examples on how to implement AntD© antenna diagnostics in your product. Cable length and connector types are also customizable. Like all such antennas, care should be taken to mount the antenna at least 10mm from metal components or surfaces, and ideally 20mm for best radiation efficiency.

2. Specification


ELECTRICAL						
Frequency (MHz)	850	900	1700	1800	1900	2100
Return Loss (dB)	-7	-11	-12	-16	-12	-12
Efficiency (%)	42	42	70	75	78	70
Gain (dBi)	-1.5	-3.0	1.5	2.5	2.5	2.5
Impedance	50 Ω					
Integrated AntD [©] Resistor						
Resistor	Shunt 10K Ohm (+/- 5%) to Ground					
Polarization	Linear					
Power Handled	50 W					
MECHANICAL						
Dimensions	70*20*01mm					
Connector	MHFII (U.FL Compatible)					
Cable Standard	Mini-Coax 1.13mm					
Cable Length and color	100 mm,Black					
ENVIRONMENTAL						
Temperature Range	-40°C to 85°C					
Storage Temperature	-40°C to 85°C					

3. Antenna Parameters


3.1 Return Loss

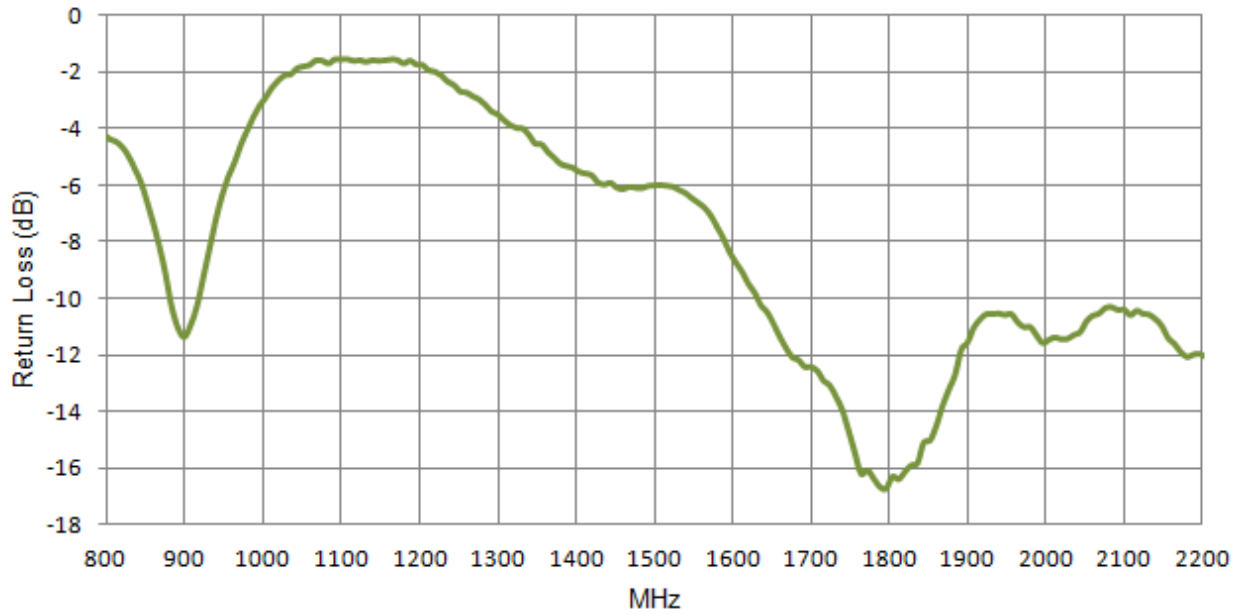

3.2 Antenna Efficiency

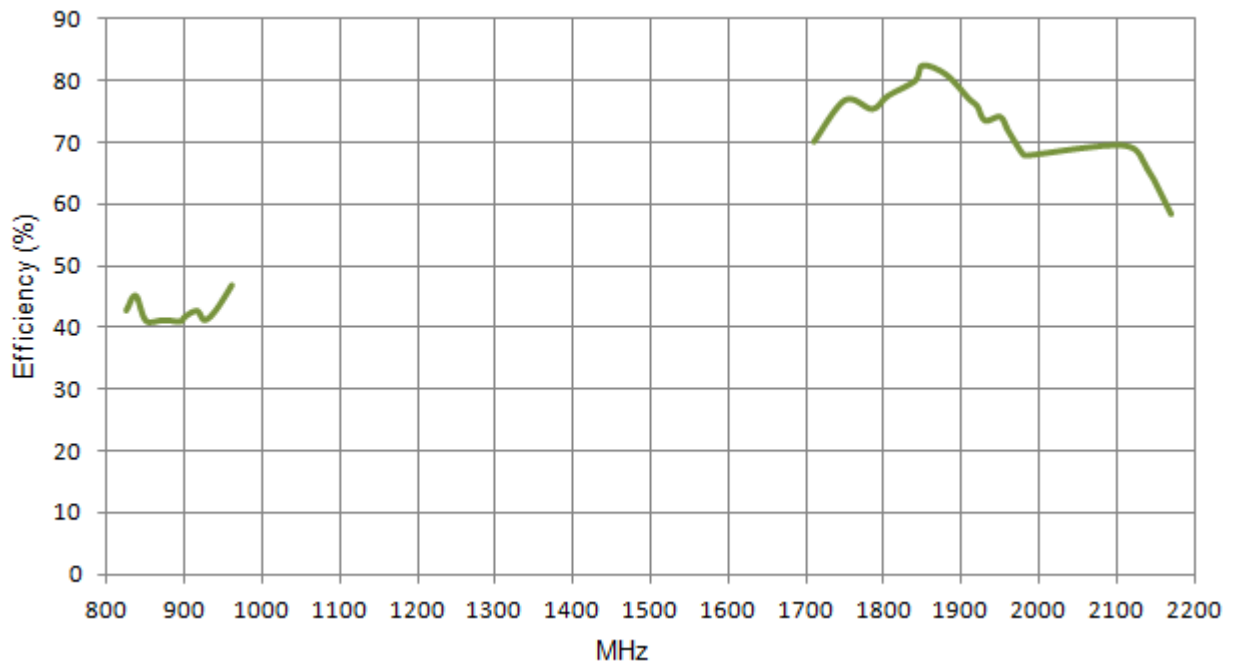

3.3 Peak Gain

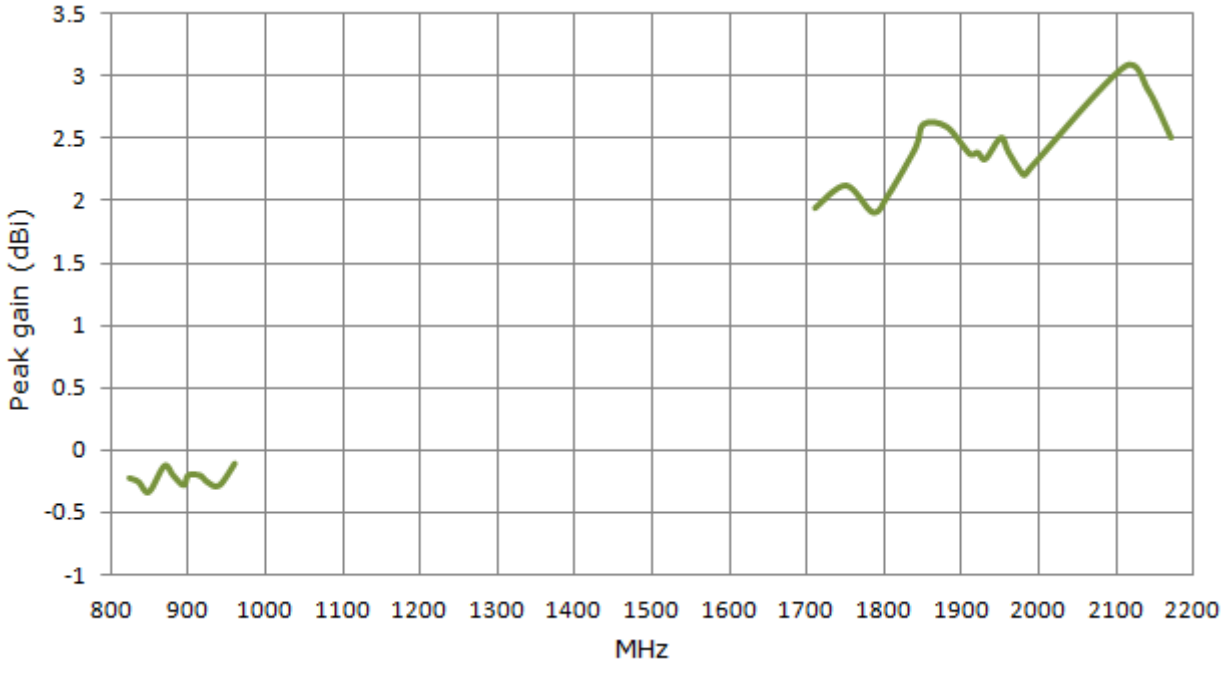

4. Radiation patterns

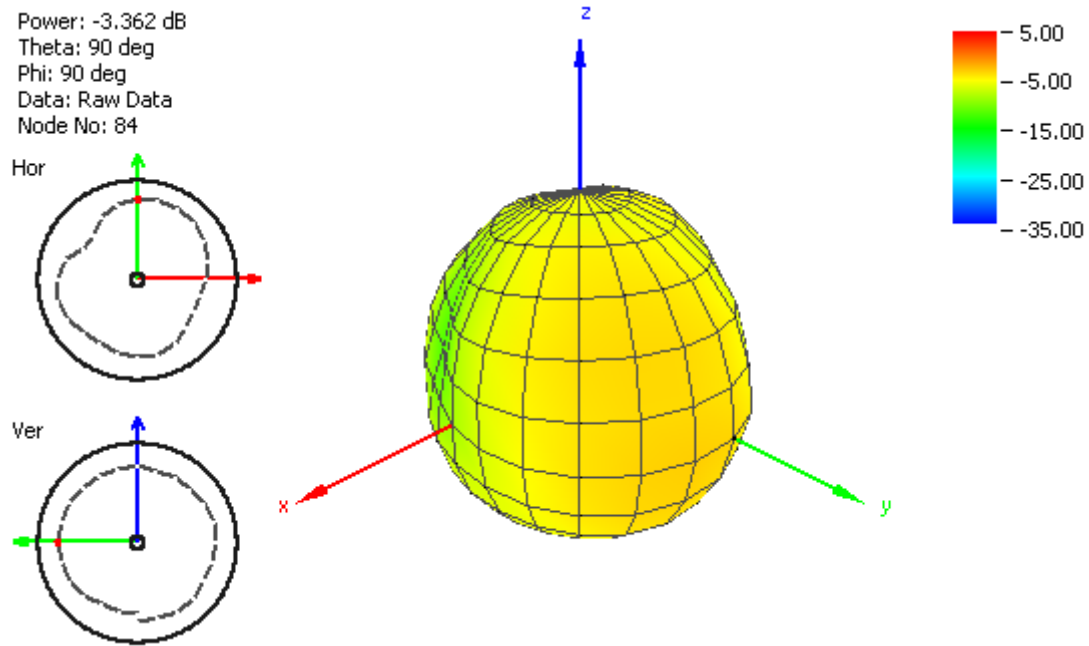


Figure 4. Radiation Pattern at 849 MHz.

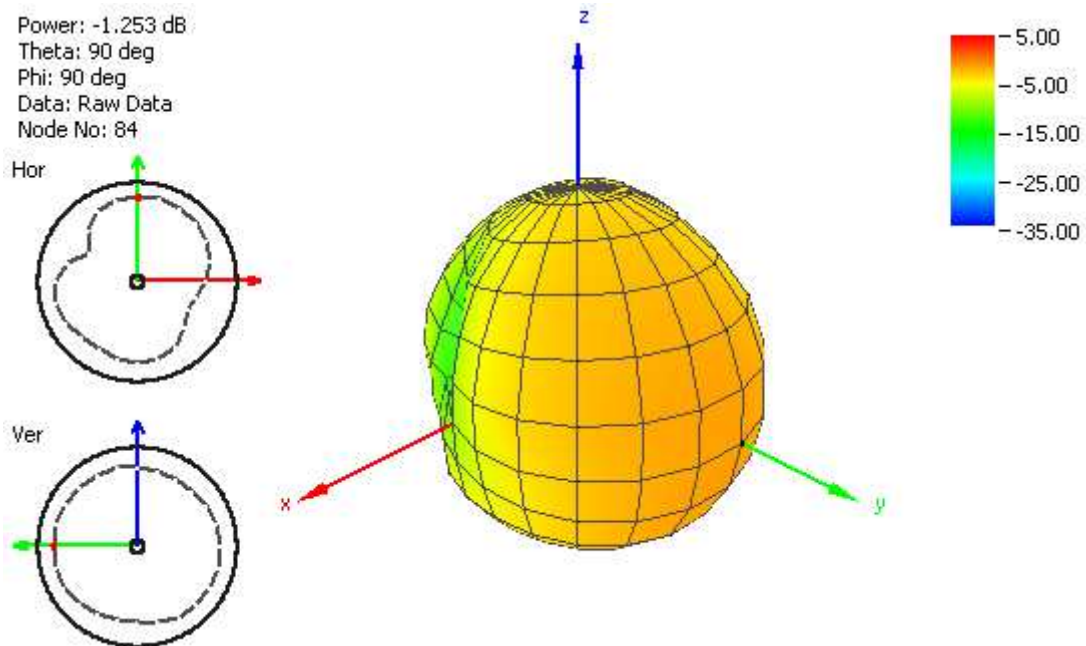


Figure 5. Radiation Pattern at 925 MHz.

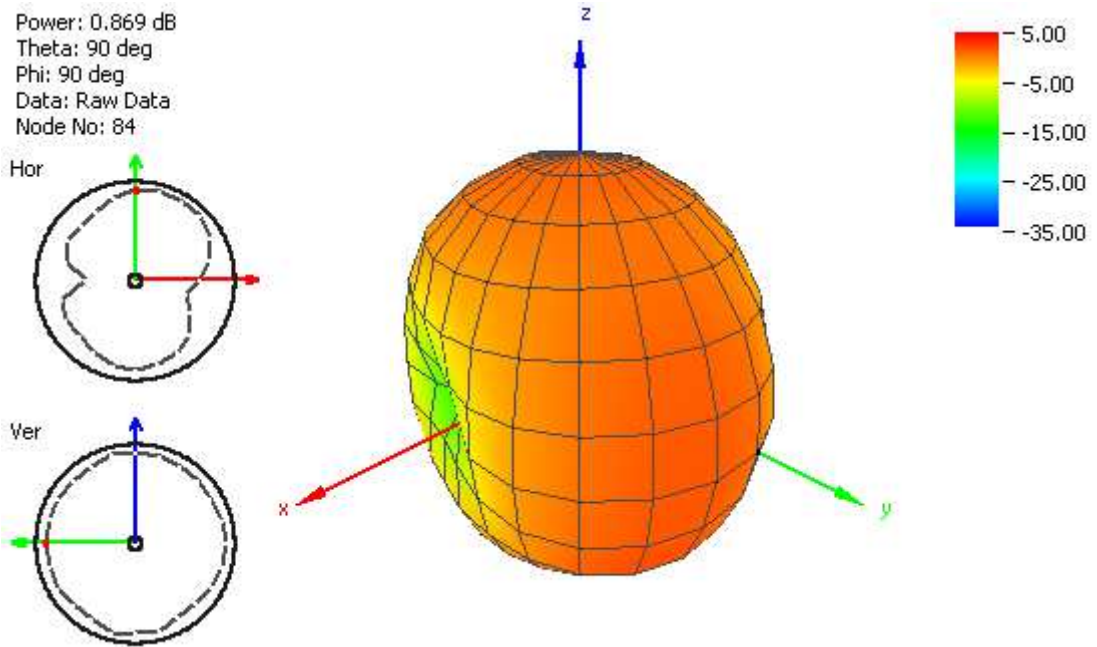


Figure 6. Radiation Pattern at 1750 MHz.

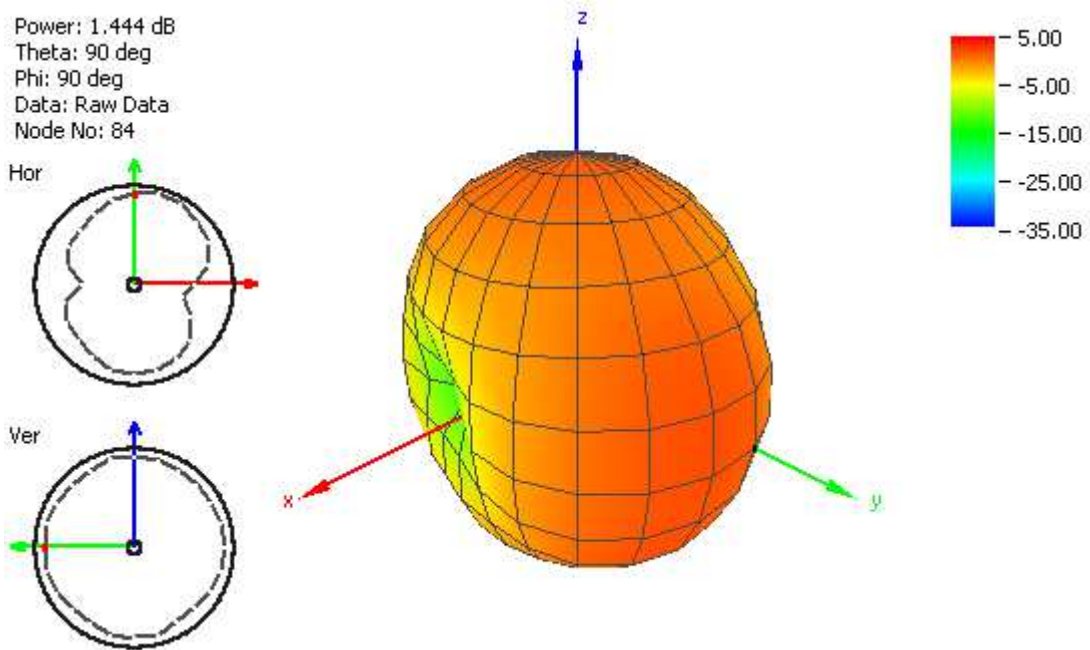


Figure 6. Radiation Pattern at 1805 MHz.

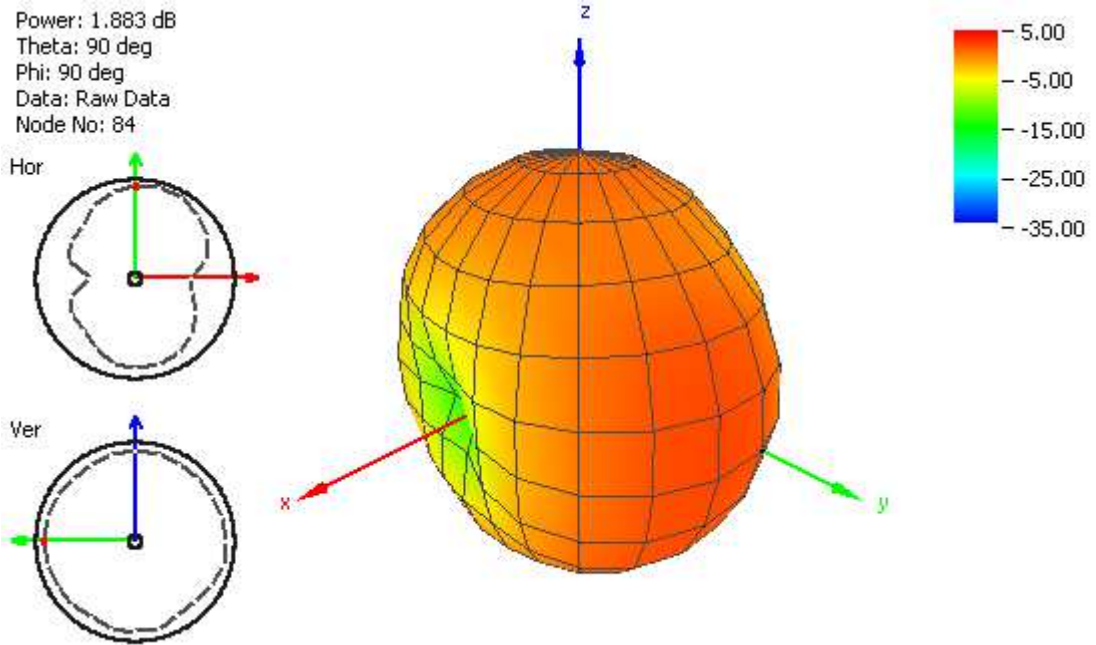


Figure 7. Radiation Pattern at 1920 MHz.

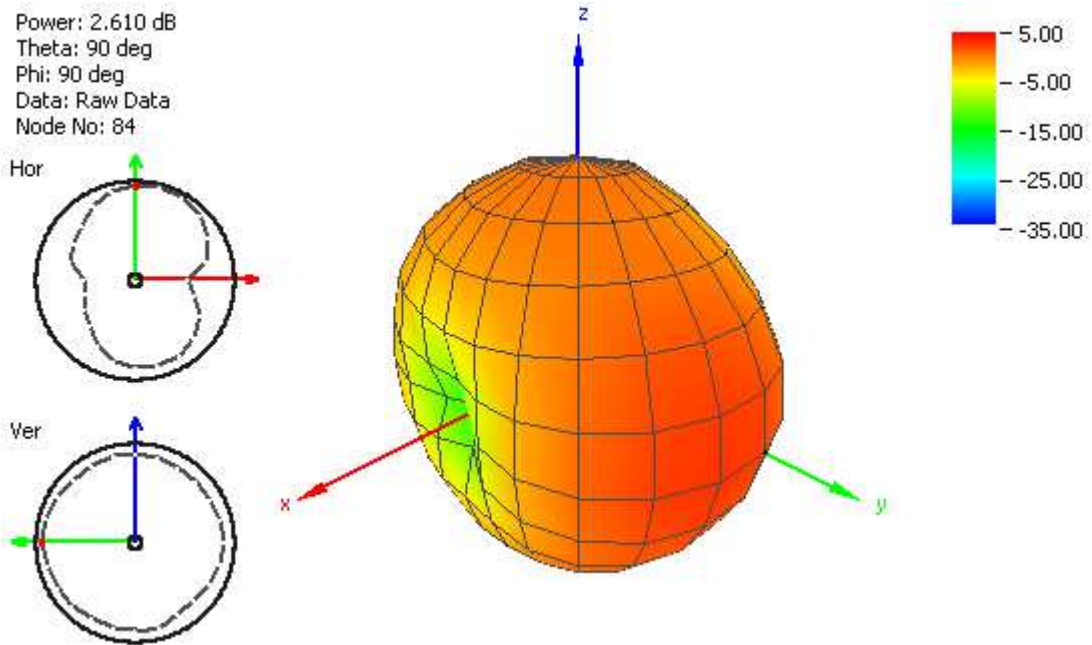


Figure 8. Radiation Pattern at 2110 MHz.

5 Drawing

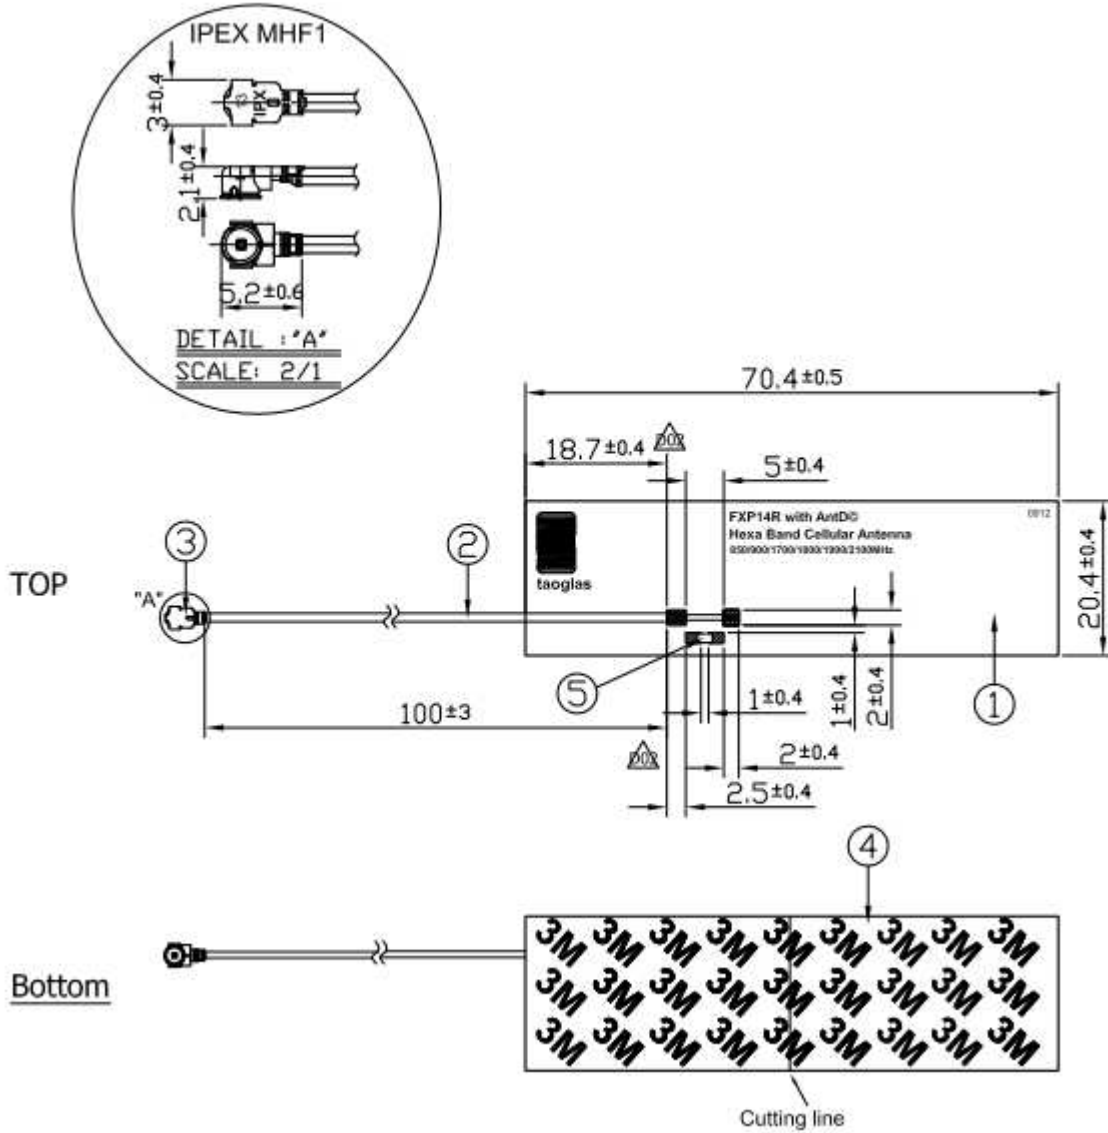


Figure 9. Mechanical Drawing for the FXP14 Antenna

	Name	Material	Finish	QTY
①	FXP14R FPCB	FPCB 0.1t	Black	1
②	1.13 Coaxial Cable	FEP	Black	1
③	IPEX MHF1	Brass	Gold	1
④	Double-Sided Adhesive	3M 467	Brown Liner	1
⑤	Resistor (R=10k Ohm)	Ceramic	N/A	1