



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Gap Filler 4000

Thermally Conductive, Liquid Gap Filler Material

## Features and Benefits

- Thermal Conductivity: 4.0 W/m-K
- Extended working time for manufacturing flexibility
- Ultra-conforming with excellent wet-out
- 100% solids - no cure by-products
- Excellent low and high temperature chemical and mechanical stability

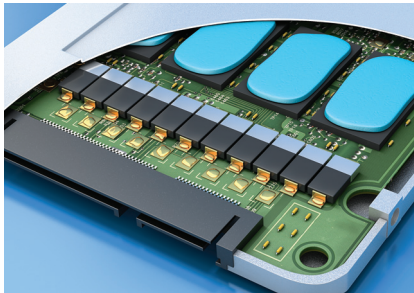

Gap Filler 4000 is a two-part, high performance, thermally conductive, liquid gap filling material. The mixed material will cure at room temperature and can be accelerated with the addition of heat. Gap Filler 4000 offers an extended working time to allow greater flexibility in the customer's assembly process.

Liquid dispensed thermal materials offer infinite thickness variations and impart little to no stress on sensitive components during assembly. Gap Filler 4000 exhibits low level natural tack characteristics and is intended for use in applications where a strong structural bond is not required.

As cured, Gap Filler 4000 provides a soft, thermally conductive, form-in-place elastomer that is ideal for fragile assemblies or for filling unique and intricate air voids and gaps.

## Typical Applications:

- Automotive electronics
- Computer and peripherals
- Between any heat-generating semiconductor and a heat sink
- Telecommunications


## TYPICAL PROPERTIES OF GAP FILLER 4000

PROPERTY	IMPERIAL VALUE	METRIC VALUE	TEST METHOD
Color / Part A	Blue	Blue	Visual
Color / Part B	White	White	Visual
Viscosity, High Shear (Pa-s) (1)	50	50	ASTM D5099
Density (g/cc)	3.1	3.1	ASTM D792
Mix Ratio	1:1	1:1	—
Shelf Life @ 25°C (months)	5	5	—
<b>PROPERTY AS CURED</b>			
Color	Blue	Blue	Visual
Hardness (Shore 00) (2)	75	75	ASTM D2240
Heat Capacity (J/g-K)	0.8	0.8	ASTM D1269
Continuous Use Temp (°F) / (°C)	-76 to 392	-60 to 200	—
<b>ELECTRICAL AS CURED</b>			
Dielectric Strength (V/mil)	450	450	ASTM D149
Dielectric Constant (1000 Hz)	7.9	7.9	ASTM D150
Volume Resistivity (Ohm-meter)	10 <sup>10</sup>	10 <sup>10</sup>	ASTM D257
Flame Rating	V-O	V-O	U.L. 94
<b>THERMAL AS CURED</b>			
Thermal Conductivity (W/m-K)	4.0	4.0	ASTM D5470
<b>CURE SCHEDULE</b>			
Working Time @ 25°C (3)	240 min (4 hrs)	240 min (4 hrs)	-
Cure @ 25°C (hrs) (3)	24	24	-
Cure @ 100°C (min) (3)	30	30	-
1) Capillary Viscosity, 1500/sec, Part A and B measured separately. 2) Thirty second delay value Shore 00 hardness scale. 3) Parallel plate rheometer, see reactivity application note.			

## Configurations Available:

- Supplied in cartridge or kit form

## Building a Part Number

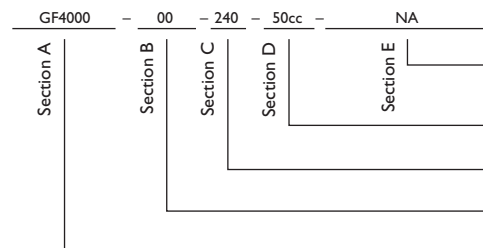

## Standard Options

◀ example

NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.

Cartridges: 50cc = 50.0cc, 400cc = 400.0cc  
Kits: 1200cc = 1200.0cc, or 6G = 6 gallon

Pot Life: 240 = 240 minutes

00 = No spacer beads

07 = 0.007" spacer beads

10 = 0.010" spacer beads

GF4000 = Gap Filler 4000 Material

Note: To build a part number, visit our website at [www.bergquistcompany.com](http://www.bergquistcompany.com).



[www.bergquistcompany.com](http://www.bergquistcompany.com)

The Bergquist Company -  
North American Headquarters  
18930 West 78th Street  
Chanhassen, MN 55317  
Phone: 800-347-4572  
Fax: 952-835-0430

The Bergquist Company -  
European Headquarters  
Netherlands  
Phone: 31-35-5380684  
Fax: 31-35-5380295

The Bergquist Company -  
Asia Headquarters  
Hong Kong  
Phone: 852-2690-9296  
Fax: 852-2690-3408

All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.

PDS\_GF4000\_0513