imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Breakout for Linklt Smart 7688 SKU: 103100002



(https://www.kickstarter.com/projects/seeed/wio-link-3-steps-5-minutes-build-your-iot-applicat/description?ref=banner_depot)

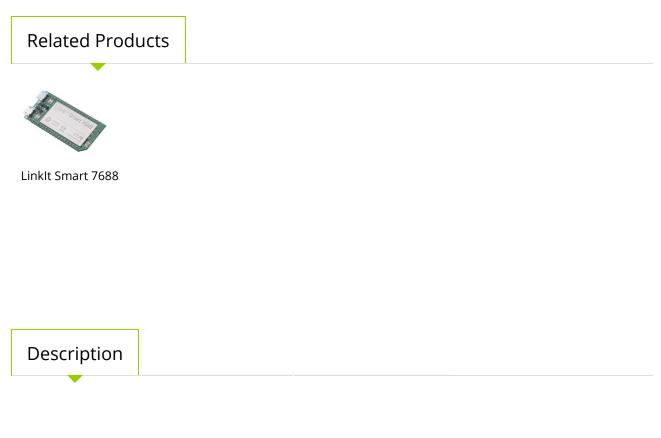

Description

Breakout for LinkIt Smart 7688 is a Grove port integrated expansion board for LinkItTM Smart 7688 development board. This breakout board will save a lot of work and makes prototyping easier through simplified wiring. It will assist a beginner to get started fast. It supports serial buses like I2C, UART. It comes with USB, Ethernet and 3.5mm Audio ports.

LinkIt Smart 7688 (a compact controller board) is an open development board, based on the OpenWrt Linux distribution, MT7688. The board is designed especially to enable the prototyping of Rich IoT Application for Smart-Home.

Features

- 3.5mm headphone Jack(with Mic) for multimedia
- 1 x Ethernet to connect to internet
- 1 x USB 2.0 for more peripherals
- Grove interface: 2 x UART, 1 x I2C
- Stereo and AUX are supported

Specification

- Input voltage: 5.0V (With USB Power port)
- Operating voltage: 3.3V
- Debug pins, Ethernet pins and USB type-A host pins connect with MT7688

DEMO



Demo – Smart WiFi Audio

It is a WiFi Audio which allows your mobile phone to connect to its WiFi and play the music in your phone. If you connect the Linklt Smart 7688 to your Router, the Audio will show the IP on the Grove RGB Backlight LCD, and also the song title. Learn more at our Recipe (http://www.seeedstudio.com/recipe/1076-diy-a-wi-fispeaker-with-linkit-7688.html).