



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Raspberry PI VGA666 DPI dtoverlays Module

SKU 103990143

- This Module has another name: Gert-VGA-adapter, or Passive VGA adapter 666 for Raspberry Pi A+/B+/2B/3B/Zero
- The Raspberry Pi has an HDMI port to connect a display.
- If your monitor only has VGA, you have to use an adapter

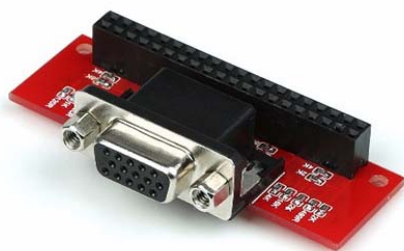

Description

This Module has another name: Gert-VGA-adapter, or Passive VGA adapter 666 for Raspberry Pi A+/B+/2B/3B/Zero

The Raspberry Pi has an HDMI port to connect a display.

If your monitor only has VGA, you have to use an adapter.

Because this requires a digital-to-analogue conversion, those adapters can be quite pricey, and they can draw lots of power.

As well as just allowing you to connect a VGA monitor natively.

And unlike composite video, the DPI interface can be run independent of the HDMI.

The software for dual screens is still under development.

Running two screens at maximum resolution will depend on the speed of GPIO.

This wasn't possible on the Model A or B.

And there's a catch: as the board uses most of your GPIO pins, you lose access to them.

All above are from [raspberry pi official website](#).

Features

- Support for Raspberry Pi A+, Raspberry Pi B+, Raspberry Pi Zero, Raspberry Pi 2,model B, Raspberry Pi 3 model B
- The VGA output supports resolution:from 800x600 up to 30fps.
- With 6 bits per channel you have a maximum of 262144 colours.
- Easy to setup.
- Easy to configure.
- Dimension: 64.00mm x 32.24mm
- Weight: 16.48 g

Part List

1 x VGA666 module