

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

























#### ■ Features

- · 2 pole USA AC plug, Class Ⅱ power unit
- Medical safety approved (2 x MOPP) accroding to ANSI/AAMI ES60601-1
- · Extremely low leakage current
- · No load power consumption< 0.3W
- Energy efficiency Level V
- Protections: Short circuit / Overload / Over voltage
- · Fully enclosed plastic case
- 3 years warranty

# Applications


- · Blood glucose meter
- · Blood pressure meter
- Nebulizer
- · Inhaler
- · Portable medical device

#### Description

GSM06U is a highly reliable, 6W wall-mounted style single-output green medical adaptor series. This product is equipped with a 2-pin (no FG) standard USA AC power plug, adopting the input range from 85VAC to 264VAC. The entire series supplies different output voltages between 5VDC and 24VDC that can satisfy the demands for various kinds of miniature medical devices. The circuitry design meets the international medical standards (2 x MOPP), having an ultra low leakage current (<50 $\mu$ A), fitting the medical devices in direct electrical contact with the patients.

With the efficiency up to 82% and the extreme low no-load power consumption below 0.3W. GSM06U is compliant with USA EISA 2007. The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case, providing the double insulation that effectively prevents electrical shock. GSM06U is approved with the international medical safety certificates.

# Model Encoding

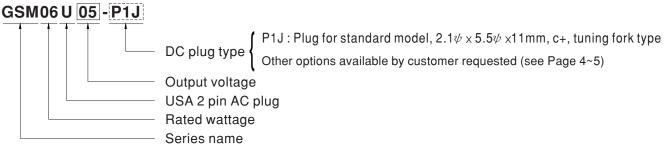






## **SPECIFICATION**

ORDER NO.		GSM06U05-P1J	GSM06U06-P1J	GSM06U07-P1J	GSM06U09-P1J	GSM06U12-P1J	GSM06U15-P1J	GSM06U18-P1J	GSM06U24-P1J	
	SAFETY MODEL NO.	GSM06U05	GSM06U06	GSM06U07	GSM06U09	GSM06U12	GSM06U15	GSM06U18	GSM06U24	
ОИТРИТ	DC VOLTAGE Note.2	5V	6V	7.5V	9V	12V	15V	18V	24V	
	RATED CURRENT	1.2A	1.0A	0.8A	0.66A	0.5A	0.4A	0.33A	0.25A	
	CURRENT RANGE	0 ~ 1.2A	0 ~ 1.0A	0 ~ 0.8A	0~0.66A	0 ~ 0.5A	0~0.4A	0 ~ 0.33A	0 ~ 0.25A	
	RATED POWER	6W	6W	6W	6W	6W	6W	6W	6W	
	RIPPLE & NOISE (max.) Note.3		50mVp-p	80mVp-p	80mVp-p	100mVp-p	120mVp-p	150mVp-p	180mVp-p	
	VOLTAGE TOLERANCE Note.4		±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±4.0%	
		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
		±5.0%	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	
	SETUP, RISE, HOLD UP TIME				= 0.070	= 0.070	= 0.070	= 0.070	= 2.070	
	VOLTAGE RANGE	85 ~ 264VAC 120 ~ 370VDC								
	FREQUENCY RANGE	47 ~ 63Hz								
	EFFICIENCY (Typ.)	68%	74%	74%	76%	77%	79%	80%	82%	
INPUT	AC CURRENT	0.18A / 100VAC		1470	1070	1170	1 3 70	0070	02 /0	
	INRUSH CURRENT (max.)	Cold start 15A / 115VAC 30A / 230VAC								
	LEAKAGE CURRENT(max.)	Touch current < 50µA/264VAC								
	LETHOLOGO GOLINGALI	>105% rated ou								
	OVERLOAD		<del> </del>	recovers autom	atically after fau	ılt condition is re	moved			
PROTECTION		Protection type: Hiccup mode, recovers automatically after fault condition is removed >120% rated output voltage								
	OVER VOLTAGE	Protection type: Clamp by zener diode								
	WORKING TEMP.	0 ~ +50°C (Refer to "Derating Curve")								
	WORKING HUMIDITY	20% ~ 90% RH non-condensing								
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH non-condensing								
	TEMP. COEFFICIENT	±0.04% / °C (0~40°C)								
	VIBRATION			period for 60min.	each along X, Y,	Zaxes				
	SAFETY STANDARDS	ANSI/AAMI ES60601-1(3.1 version),CAN/CSA-C22 3rd edition, EAC TP TC 004 approved								
	WITHSTAND VOLTAGE	I/P-O/P:5656VDC								
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH								
SAFETY &		Parameter		Standard Test Level / Note				Level / Note		
EMC (Note. 7)	EMC EMISSION	Conducted en	nission	FCC PART 15 & 18 / CISPR22, CAN ICES-3(B)/NMB-3(B)			MB-3(B) Clas	Class B		
		Radiated emis	ssion	FCC PART 15 & 18 / CISPR22, CAN ICES-3(B)/NMB-3(B)				Class B		
	MTBF	500Khrs min. MIL-HDBK-217F(25°C)								
OTHERS	DIMENSION	32*66*42.5mm	(L*W*H)							
	PACKING	100g; 110pcs/1	100g; 110pcs/12Kg/CARTON							
	PLUG	See page 4~5; Other type available by customer requested								
CONNECTOR	CABLE		•	able by custome	•					
	1.All parameters are specified at 115VAC input, rated load, 25°C 70% RH ambient.									
	2.DC voltage: The output voltage set at point measure by plug terminal & 50% load.									
NOTE	3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µf & 47µf capacitor.									
	4.Tolerance: includes set up tolerance, line regulation, load regulation.									
	5.Line regulation is measured from low line to high line at rated load.									
	6.Load regulation is measured from 10% to 100% rated load.									
	7. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the									
	EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."									
	(as available on http://www.meanwell.com)									
	\(\text{\tint{\text{\tint{\text{\tin}\text{\tex{\tex									



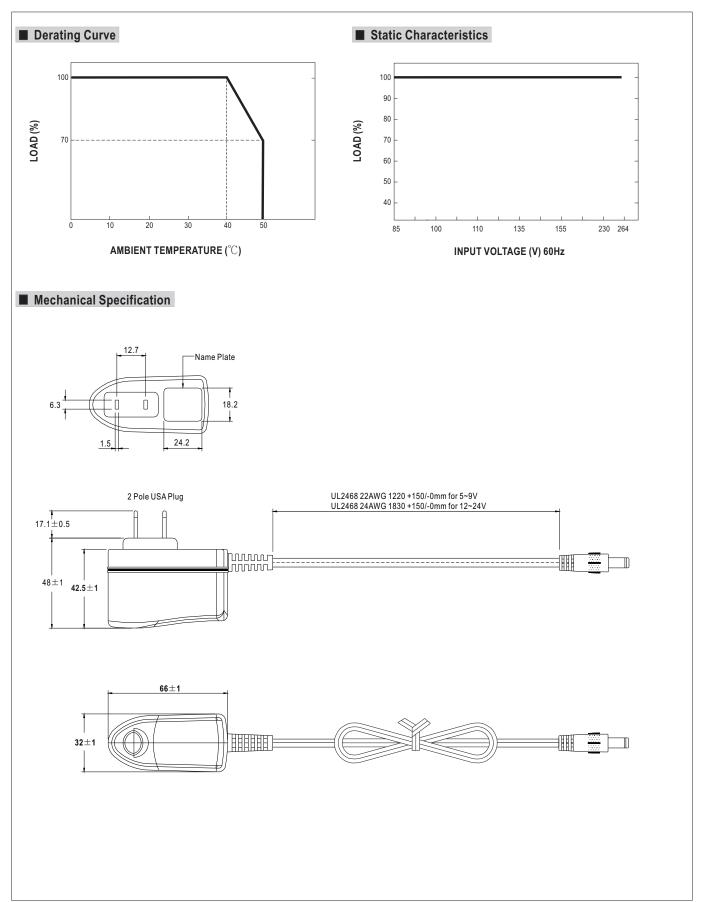



### ■ DC output plug

### O Standard plug: P1J

Unit:mm

P1J		Pin Assignment
5.5	11±0.5mm	Outside ⊖—⊕ Inside

# Optional DC plug:

Tuning For	Type No.	А	В	С	
Tulling For	Type No.	OD	ID	L	
	C	P1I	5.5	2.1	9.5
	(Straight)  (Right-angled)	P1L	5.5	2.5	9.5
A <sub>-</sub> A		P1M	5.5	2.5	11.0
A B		P1IR	5.5	2.1	9.5
→ T+P		P1JR	5.5	2.1	11.0
		P1LR	5.5	2.5	9.5
		P1MR	5.5	2.5	11.0
Barre	Type No.	Α	В	С	
Daile	туре по.	OD	ID	L	
	. C .	P2I	5.5	2.1	9.5
	(Straight)	P2J	5.5	2.1	11.0
^		P2L	5.5	2.5	9.5
A		P2M	5.5	2.5	11.0
A B		P2IR	5.5	2.1	9.5
		P2JR	5.5	2.1	11.0
		P2LR	5.5	2.5	9.5
	(Right-angled)	P2MR	5.5	2.5	11.0
1 1 .	Type No.	Α	В	С	
Lock	Style	турстчо.	OD	ID	L
. A	Locking C	P2S(S761K)	5.53	2.03	12.06
B B	SWITCHCRAFT original or equivalent		5.53	2.54	12.06
B			5.53	2.03	9.52
SI	P2D(760K)	5.53	2.54	9.52	
Min. Pin	Type No.	Α	В	С	
IVIIII. I III	1,700.101	OD	ID	L	
ı,A,	A. +C		2.35	0.7	11.0
A B		P3B	4.0	1.7	11.0
— — — — — — — — — — — — — — — — — — —	P3C	4.75	1.7	11.0	



Center Pin Style	Type No.	A OD	В	С	D Center Pin	
	P4A	5.5	3.4	11.0	1.0	
	P4B	6.5	4.4	11.0	1.4	
	P4C	7.4	5.1	11.0	0.6	
EIAJ equivalent			Pin Assignment			
Min. DIN 3 Pin with Lock (male)	Type No.	PIN No		Output		
	R6B	1	-	+Vo		
		2		-Vo		
KYCON KPPX-3P equivalent		3		+Vo		
M: 501/45: (11.1.1/4.1.)	T N	Pin Assignment				
Min. DIN 4 Pin with Lock (male)	Type No.	PIN No	).	Output		
	R7B	1		+Vo		
		2		-Vo		
KYCON KPPX-4P equivalent		3		-Vo		
KTOON KIT X-41 equivalent		4		+Vo		
Min. DIN 4 Pin with Lock (female)	Type No.	Pin Assignment				
Will. Bill 41 ill with Lock (Iomaic)	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	PIN No	).	Output		
	R7BF	1		+Vo		
2 3 [100000]		2		-Vo		
		3		-Vo		
KYCON KPJX-CM-4S equivalent		4		+Vo		
Stripped and tinned leads	Type No.	Pin Assignment				
Otripped and timied leads	турстчо.	PIN No	).	Output		
1	by customer	1 (Ribbed	i)	+Vo		
L1 Length of Land L1 by request (MW's standard length, L: <u>25</u> mm, L1: <u>10</u> mm)		2 ( Letter	.)	-Vo		

### **■** Installation Manual

Please refer to : http://www.meanwell.com/manual.html