



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Component Housings

**Weidmuller DK 4 and DKT 4 modular terminals** are suitable for the installation of electronic components with a maximum diameter or width of 4.5 mm. Four independent clamping yoke screw connections are available for this purpose. A snap-on contour frame expands the installation space in the DK 4 by 6 mm. Depending on type, these modular terminals are suitable for mounting on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails according to European Standards EN 50035 and EN 50022.

**Weidmuller WDK 2.5 modular terminals** are suitable for the installation of electronic components with a maximum width of 4 mm. Up to four independent clamping yoke screw connections or four 6.3 x 0.8 tab connections are available for this purpose. These modular terminals are suitable for mounting on TS 35 x 7.5 or TS 35 x 15 mounting rails.

**Weidmuller EG 1 housings** have four screw connections and, as accessories, up to four 0.8 x 2.8 or 0.8 x 4.8 mm solder/tab connections on a width of 18 mm. The screw clamp busbar ends with a solder ring inside the housing. Two end plates seal the module. Depending on type, the modules are mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails.

**Weidmuller EG 2 housings** — The external shape of these housings corresponds to Type EG 1. Four screw connections or up to eight 0.8 x 6.3 mm / 0.8 x 2.8 mm tab connectors are connected with a printed circuit board in the housing. They can be mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails.

**Weidmuller EG 3 housings** provide six screw connections or twelve 0.8 x 6.3 mm / 0.8 x 2.8 mm tab connections on a width of 22.5 mm. As an accessory, Weidmuller offers a speed printed circuit board with a 2.54 mm hole pitch or fully copper-coated. The engageable combination foot allows the terminals to be mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails. The MPL mounting plate is used to mount the housing directly (without mounting rail). Due to the sliding foot construction, the EG 3 can be turned through 180° in all types of assembly (e.g. exchanging input and output).

**Weidmuller EG 4 housing**, like Type EG 3, offers a width of 22.5 mm. However, the greater installation depth (75 mm) and height (109 mm) allow the installation of more complex circuit configurations. The installed circuit can be connected via six screw connections.

The engageable combination foot allows the terminals to be mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails. Due to the sliding foot construction, the EG 4 can be slid 6 mm forwards or backwards on the engaging foot and can be turned through 180° (e.g. exchanging input and output).

**Weidmuller EG 5 housings** — The external dimensions of these housings correspond to Type EG 4. The EG 5 has twelve screw connections which can be wired with solder lugs inside the housing. The engageable combination foot allows the terminals to be mounted on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails. Due to the sliding foot construction, the EG 4 can be slid 6 mm forwards or backwards on the engaging foot and can be turned through 180° (e.g. exchanging input and output).

**Weidmuller RS 70 individual parts for rail mounting** — The end sections can be engaged to form units up to 20 mm wide. Any desired intermediate spacers or feet can be connected between two side pieces (fixing feet) at intervals of 5 mm. In this way, a carrier module is constructed for a printed circuit board on which various components can be soldered. The module snaps onto TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails.

**Weidmuller rail-mounted profiles** — The RS 45, RS 80 and RS 100 profiles are available as 2 m long strips. The extruded profiles can be easily cut to any length with a saw. In this way, a carrier module is constructed for a printed circuit board on which various components can be soldered. The fixing feet can be slid into these profiles for mounting on TS 32, TS 35 x 7.5 or TS 35 x 15 mounting rails. The sliding foot construction of the RS 80 also allows the fixing foot to be turned through 180°.

**The Wavebox is characterized by:**

- Optimal width for any application (12.5 mm, 17.5 mm, 22.5 mm, 45 mm)
- Large component assembly
- UL94 Flammability class V2
- No tools required for assembly
- Plug-in printed circuit board
- Plug-in cross-connection via ZQV 2.5 N
- Hinged, transparent cover
- BLZ 5.08 screw/plug and socket connector
- BLZF 5.08 optional tension clamp/plug and socket connector
- Marking option with WS tags
- Suitable for snap-fitting on TS 35

# Modular Terminals

**Dimensions**

Terminal width (+ 0.2 assembly tolerance)
Insulation stripping length

**Connection Data**




Screw connection, solid strand
Screw connection, flexible strand
Conductor cross-section

**VDE rated Data**

Rated wire size
Rated voltage
Rated current
Power loss

**Connection diagram**


**Ordering Data**

Modular terminal used to widen component area	For TS 32		<b>Type Part No.</b>
Contour frame used to widen component area (6 mm width)	For TS 32		<b>Type Part No.</b>
	For TS 35		<b>Type Part No.</b>


**Accessories**

Mounting rail (2 m long)	
End bracket (thickness mm)	For TS 32 For TS 35
End plate (thickness mm)	
Small partition	
Socket for test plug	
Test plug (pin diameter)	
Jumpers (preassembled)	2-pole 3-pole 4-pole 10-pole
Switchable jumper bracket	
Connection sleeve	
Screw	
Cover plate (4 terminals)	
Screw (plastic)	
Jumper bridge	

**DK 4**



**DKT 4**



**WDK 2.5**



**WDK 2.5 F**



**WDK 2.5 FF**




6 mm	6 mm	5 mm	5 mm	5 mm	5 mm
9 mm	9 mm	10 mm	10 mm	10 mm	-
0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	
0.5...4 mm <sup>2</sup>	0.5...4 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>	
AWG #22...12	AWG #22...17	AWG #26...4	AWG #26...4	AWG #26...4	
4 mm <sup>2</sup>	4 mm <sup>2</sup>	2.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	1 mm <sup>2</sup>	
380 VAC	380 VAC	380 VAC	380 VAC	380 VAC	
10 A	10 A	26 A	12 A (2 x 6A)	12 A (2 x 6 A)	
0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	
DK 4 PA <b>204988</b>	DK 4 PA <b>111546</b>	DKT 4 PA <b>68736</b>	DKT 4 PA <b>111566</b>		
DK 4/35 PA <b>202684</b>	DK 4/35 PA <b>111556</b>	DKT 4 /35PA <b>68746</b>	DKT 4/35 PA <b>111576</b>	WDK 2.5 <b>102320</b>	WDK 2.5 <b>102310</b>
DK 4 RA <b>69096</b>	DK 4 RA <b>69096</b>			WDK 2.5 F <b>102160</b>	WDK 2.5 FF <b>102170</b>
DK 4 RA/35 <b>69106</b>	DK 4 RA/35 <b>69106</b>				
<b>Type</b>	<b>Part No.</b>	<b>Type</b>	<b>Part No.</b>	<b>Type</b>	<b>Part No.</b>
TS 32	<b>12280</b>	TS 32	<b>12280</b>	TS 35 x 7.5	<b>38340</b>
TS 35 x 7.5	<b>38340</b>	TS 35 x 7.5	<b>38340</b>	Slotted	<b>51450</b>
TS 35 x 15	<b>49800</b>	TS 35 x 15	<b>49800</b>	TS 35 x 15	<b>49800</b>
EWK 1 (8.5)	<b>20616</b>	EWK 1 (8.5)	<b>20616</b>	TS 35 x 15	<b>49800</b>
EW 35 (8.5)	<b>38356</b>	EW 35 (8.5)	<b>38356</b>	TS 35 x 15	<b>49800</b>
AP PA (1.5)	<b>35926</b>	AP PA (1.5)	<b>68756</b>	TS 35 x 15	<b>49800</b>
TSch 4	<b>36336</b>	TSch 4	<b>36336</b>	WAP	<b>105910</b>
StB 8.5	<b>21570</b>			WAP	<b>105910</b>
PS (ø 2.3)	<b>18040</b>			WAP	<b>105910</b>
Q 2	<b>33640</b>			WQV 2.5	<b>105366</b>
Q 3	<b>33650</b>			WQV 2.5	<b>105376</b>
Q 4	<b>33660</b>			WQV 2.5	<b>105386</b>
Q 10	<b>36860</b>			WQV 2.5	<b>105446</b>
VL 2	<b>44670</b>			WQV 2.5	<b>105446</b>
VH 10	<b>44660</b>				
BS M 2.5 x 14	<b>26680</b>				
AD 4	<b>30340</b>				
BSK M 2.5 x 18	<b>30330</b>				
QB 2*	<b>48270</b>	QB 2*	<b>48270</b>		
QB 3*	<b>48280</b>	QB 3*	<b>48280</b>		
QB 4*	<b>48290</b>	QB 4*	<b>48290</b>		
QB 75 bare*	<b>52640</b>	QB 75 blank*	<b>52640</b>		
Insulation prof.	<b>52670</b>	Insulation prof.	<b>52670</b>		

\*When using QB: conductor connection = max. 2.5 mm<sup>2</sup>

APPLICATION SPECIFIC  
SIGNAL INTERFACE

# W-Series

## WDK...N for electronic components

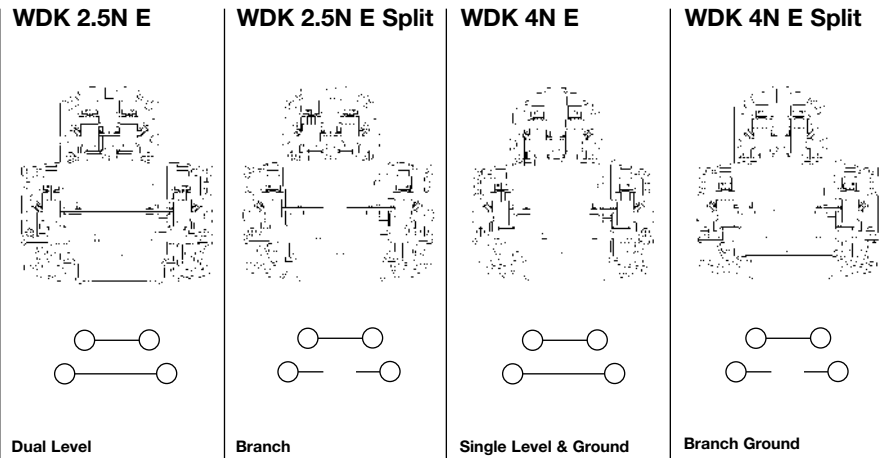

Available Options	Version	Part No.	Part No.	Part No.	Part No.	
	Wemid	<b>1041630000</b>	<b>1041640000</b>	<b>1041930000</b>	<b>1041940000</b>	
<b>Dimensions</b>						
Width/length/height mm (in.)	with TS 35 x 7.5	5/60/62 (0.20/2.36/2.44)	5/60/62 (0.20/2.36/2.44)	6/60/64 (0.24/2.36/2.52)	6/60/64 (0.24/2.36/2.52)	
Insulation stripping length	mm (in.)	8 (.31)	8 (.31)	8 (.31)	8 (.31)	
<b>Technical Data</b>						
Rated voltage / rated current / wire size (AWG)	UL	300 V / 10 A / #22...12	300 V / 10 A / #22...12	300 V / 10 A / 22...10	300 V / 10 A / 22...10	
	CSA	300 V / 20 A / #26...12	300 V / 20 A / #26...12	300 V / 20 A / 26...10	300 V / 20 A / 26...10	
	VDE	- / - / 2.5 mm <sup>2</sup>	- / - / 2.5 mm <sup>2</sup>	- / - / 4 mm <sup>2</sup>	- / - / 4 mm <sup>2</sup>	
Torque	Nm (lb. in.)	0.51 (4.5)	0.51 (4.5)	1 (9.0)	1 (9.0)	
Clamping Screw	M	2.5	2.5	3	3	
<b>End plate/partition</b>						
	(Thickness 1.5 mm)	Wemid	WAP	<b>1084000000</b>	WAP	<b>1084000000</b>
		Blue Wemid	WAP	<b>1084080000</b>	WAP	<b>1084080000</b>
	(Thickness 3.0 mm)	Wemid	WAP	<b>105880</b>	WAP	<b>105880</b>
<b>Jumpers</b>						
	2-pole	ZQV 2.5N/2	<b>169380</b>	ZQV 2.5N/2	<b>169380</b>	
	3-pole	ZQV 2.5N/3	<b>169381</b>	ZQV 2.5N/3	<b>169381</b>	
	4-pole	ZQV 2.5N/4	<b>169382</b>	ZQV 2.5N/4	<b>169382</b>	
	10-pole	ZQV 2.5N/10	<b>169388</b>	ZQV 2.5N/10	<b>169388</b>	
	2-pole			ZQV 4N/2	<b>1758250000</b>	
	3-pole			ZQV 4N/3	<b>1762630000</b>	
	4-pole			ZQV 4N/4	<b>1762620000</b>	
	10-pole			ZQV 4N/10	<b>1758260000</b>	
	LS2.8	<b>105640</b>	LS2.8	<b>105640</b>	LS2.8	<b>105640</b>
	WQB B/24	<b>157906</b>	WQB B/24	<b>157906</b>	WQB B/24	<b>053520</b>
				QB 75	<b>052670</b>	
				QB 75	<b>052670</b>	
<b>Tools</b>						
	Screwdriver	SD	<b>903701</b>	SD	<b>903701</b>	
<b>Marking tags</b>						
	Print					
	Consecutive horizontal	DEK 5/5	<b>473460001</b>	DEK 5/5	<b>473460001</b>	
	Consecutive vertical	DEK 5/5	<b>473560001</b>	DEK 5/5	<b>473560001</b>	

Note: Part numbers shown are for a single card of pre-printed tags numbered 1-50.