

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







REVISIONS				
REV	DESCRIPTION	DATE	ISSUED BY	
_	ISSUED DRAWING	05/10/06	Y. SEKIGUCHI	

FILE NAME: ACAD\MXFMR\A313620C.DWG	SCALE: NONE	REV: -	COVER SHEET	
TITLE: HBL-0334 PIEZOELECTRIC INVERTER	DOCUMENT NUM	BER: P-A3-	-13620	
TAMURA CORPORATION OF AMERICA	PREPARED BY:	K. BRENNAN	05/09/06	
43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	ENGINEERING:	M. PITCHAI	05/10/06	
TEL: (951)699−1270 • FAX: 9516769482  CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	APPROVED:	Y. SEKIGUCHI	05/10/06	
PROPRIETY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMLE				

#### 1. Scope

This applies to the CCFT Inverter (Cold—Cathode Flourescent Tube Inverter) HBL-0334 (RoHS Compliant)

#### 2. Electrical Characteristics

a. Absolute Maximum Rating

		6.0V		
Max.	output	power	0.8W	MAX.



### b. Input/Output Characteristics


The measuring circuit and measuring method shall be as set forth in Section 4. (Unless otherwise specified,  $Ta = 25^{\circ}C$ )

Values are those obtained 3 minutes after the power is turned on.

Item	Specification
Input Voltage	3.0V ~ 5.5V
Input current	280mA MAX (Vin = 3.0V)
Output open voltage	1100Vrms MIN (at ambient temperature 0°C)
Output current	1.4mArms ±10%
Frequency	100KHz ±10%
ON/OFF function	ON: ON/OFF terminal signal HIGH (2.5V ~ Vin) OFF: ON/OFF terminal signal LOW (0V ~ 0.5V)


#### c. Duty Dimming

The duty dimming must be possible by applying the following signal to the ON/OFF terminal,

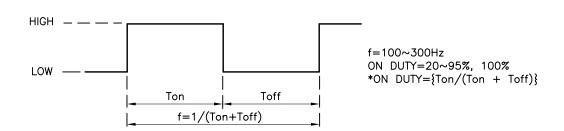


FILE NAME: ACAD\MXFMR\A3136201.DWG	SCALE: NONE	REV: -	DATE: 05/09/06	SHEET 1	OF 4
TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	TITLE: HB	0334	PIEZOELECTRIC	INVERT	ER
TEL: (951)699-1270 • FAX: 9516769482	DOCUMENT	NUMBER:	P-A3-1	3620	
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANCE WITHOUT PRIOR NOTICE			1 /(0 1	5020	

d. Input Sequence and the rise rate of voltage (ON/OFF)

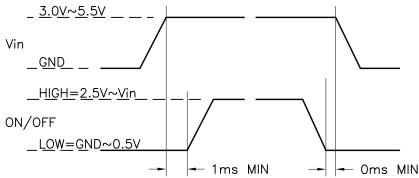

Until Vin voltage reaches the spec voltage, it does not change ON/OFF function from LOW to HIGH.

When the terminal Vin is turned off, it is necessary to ON/OFF=LOW.

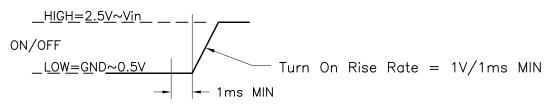

The start up rise rate must be 1V/1ms or faster. If the minimum slow rate requirement is not met then the inverter output may not start.

## 3. Input/Output Interface Connection

Input CN2: SMO3B-SRSS-TB (LF) (JST) or SMO3B-SRSS-TB (LF) (SN) (JST)


Pin No.	Function	
1	Vin	
2	ON/OFF	
3	GND	

Output CN1: SM02B-BHSS-1-TB (LF) (JST) or SM02B-BHSS-1-TB (LF) (SN) (JST)

Pin No.	Function	
1	НОТ	
2	COLD	

FILE NAME: ACAD\MXFMR\A3136202.DWG	SCALE: NONE	REV: -	DATE: 05/09/06	SHEET 2 OF 4
TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	TITLE: HBI	0334	PIEZOELECTRIC	INVERTER
TEL: (951)699−1270 • FAX: 9516769482	DOCUMENT	NUMBER:	P-A3-13	3620
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANCE WITHOUT PRIOR NOTICE				

4. Measuring Circuit and Method for Electrical Characteristic

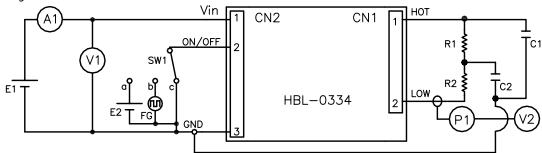

E1: DC regulated power supply

E2: DC regulated power supply

V1: DC voltmeter

V2: Effective value voltmeter

A1: DC ammeter

P1: Probe

FG: Function generator

<Equivalent load for inspection>

R1: 133kΩ, 1W R2: 133kΩ, 1W C1: 2pF, 3kV C2: 3pF, 3kV  $3.0V \sim 5.5V$ 

2.5V

TR6851 (ADVANTEST) or equivalent

3400B (YHP) or equivalent

Type 2011 Class 0.5 (YEW) or equivalent

P6021 (Tektronix) or equivalent

3314A (HP) or equivalent

#### 5. Ambient Conditions

a. Temperature

Operating temperature: 0°C ~ 50°C Storage temperature: -20°C ~ 70°C

b. Humidity

Operating humidity: 20% ~ 80% (No condensation) Storage humidity: 5% ~ 90% (No condensation)

6. Reliability

The reliability is verified on the following items

Item	Specification	Sample Qty
Left at high temp.	Ambient temperature 70°C, 240H	4
Left at low temp.	Ambient temperature —20°C, 240H	4
Left at High temp. and high humidity	Ambient temperature 40°C, Humidity 90%, 240H	4
Temperature Cycle	−20°C ~ 70°C, 5 cycles	4
High temperature power on	Ambient temperature 50°C, input voltage 5.5V, output current 1.4mArms, 500H (Equivalent load resistance)	11
ON/OFF test	5 sec:ON, 5 sec:OFF, 50000 times (Input voltage 5.5V, output current 1.4mArms, Equivalent load resistance)	5
Vibration	Acceleration 3G, frequency sweep 10~55Hz for 45 min. Once in each of X, Y, and Z directions.	3
Shock	Acceleration 80G, acting time 11ms, 3 times in each of X, Y, and Z directions.	3

After the end of each test. leave the product at room temperature and humidity for 24 hours. The Electrical and Mechanical characteristics shall remain within spec.


FILE NAME: ACAD\MXFMR\A3136203.DWG	SCALE: NONE REV: -	DATE: 04/10/06 SHEET 3 OF 4
TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	TITLE: HBL-0334	PIEZOELECTRIC INVERTER
TEL: (951)699-1270 • FAX: 9516769482  CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANCE WITHOUT PRIOR NOTICE	DOCUMENT NUMBER:	P-A3-13620

#### 7. Precautions for static electricity

When transporting this product, use materials that will not develop an electrical charge. When handling this product, be sure to wear antistatic wrist bands or other protective equipment to prevent the product from being damaged by any electric charge. Please make sure neither excessive impact nor bending occurs to the part during handling and transportation. This could cause the part to malfunction.

- 8. An input fuse is built into this inverter.
- 9. Dimensions and Connectors:

Dimensions are in mm[Inches]

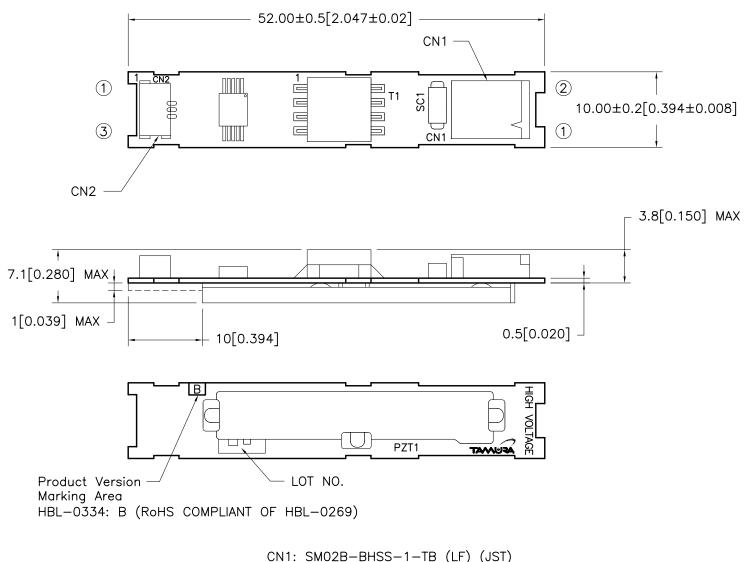

1 HOT (2) COLD

CN2: SM03B-SRSS-TB (LF) (JST)

(1) VIN

② ON/OFF

3 GND

FILE NAME: ACAD\MXFMR\A3136204.DWG	SCALE: NONE REV: - DATE: 05/09/06 SHEET 4 OF 4
TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE • TEMECULA • CA • 92590	TITLE: HBL-0334 PIEZOELECTRIC INVERTER
TEL: (951)699-1270 • FAX: 9516769482	DOCUMENT NUMBER: P-A3-13620
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANCE WITHOUT PRIOR NOTICE	