



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REVISONS		DATE	BY	APPV
G	EC 0G3C 0124 05	19MAR05	BSV	JLG
G1	REVISED PER ECO-09-020935	28AUG09	KK	AEG

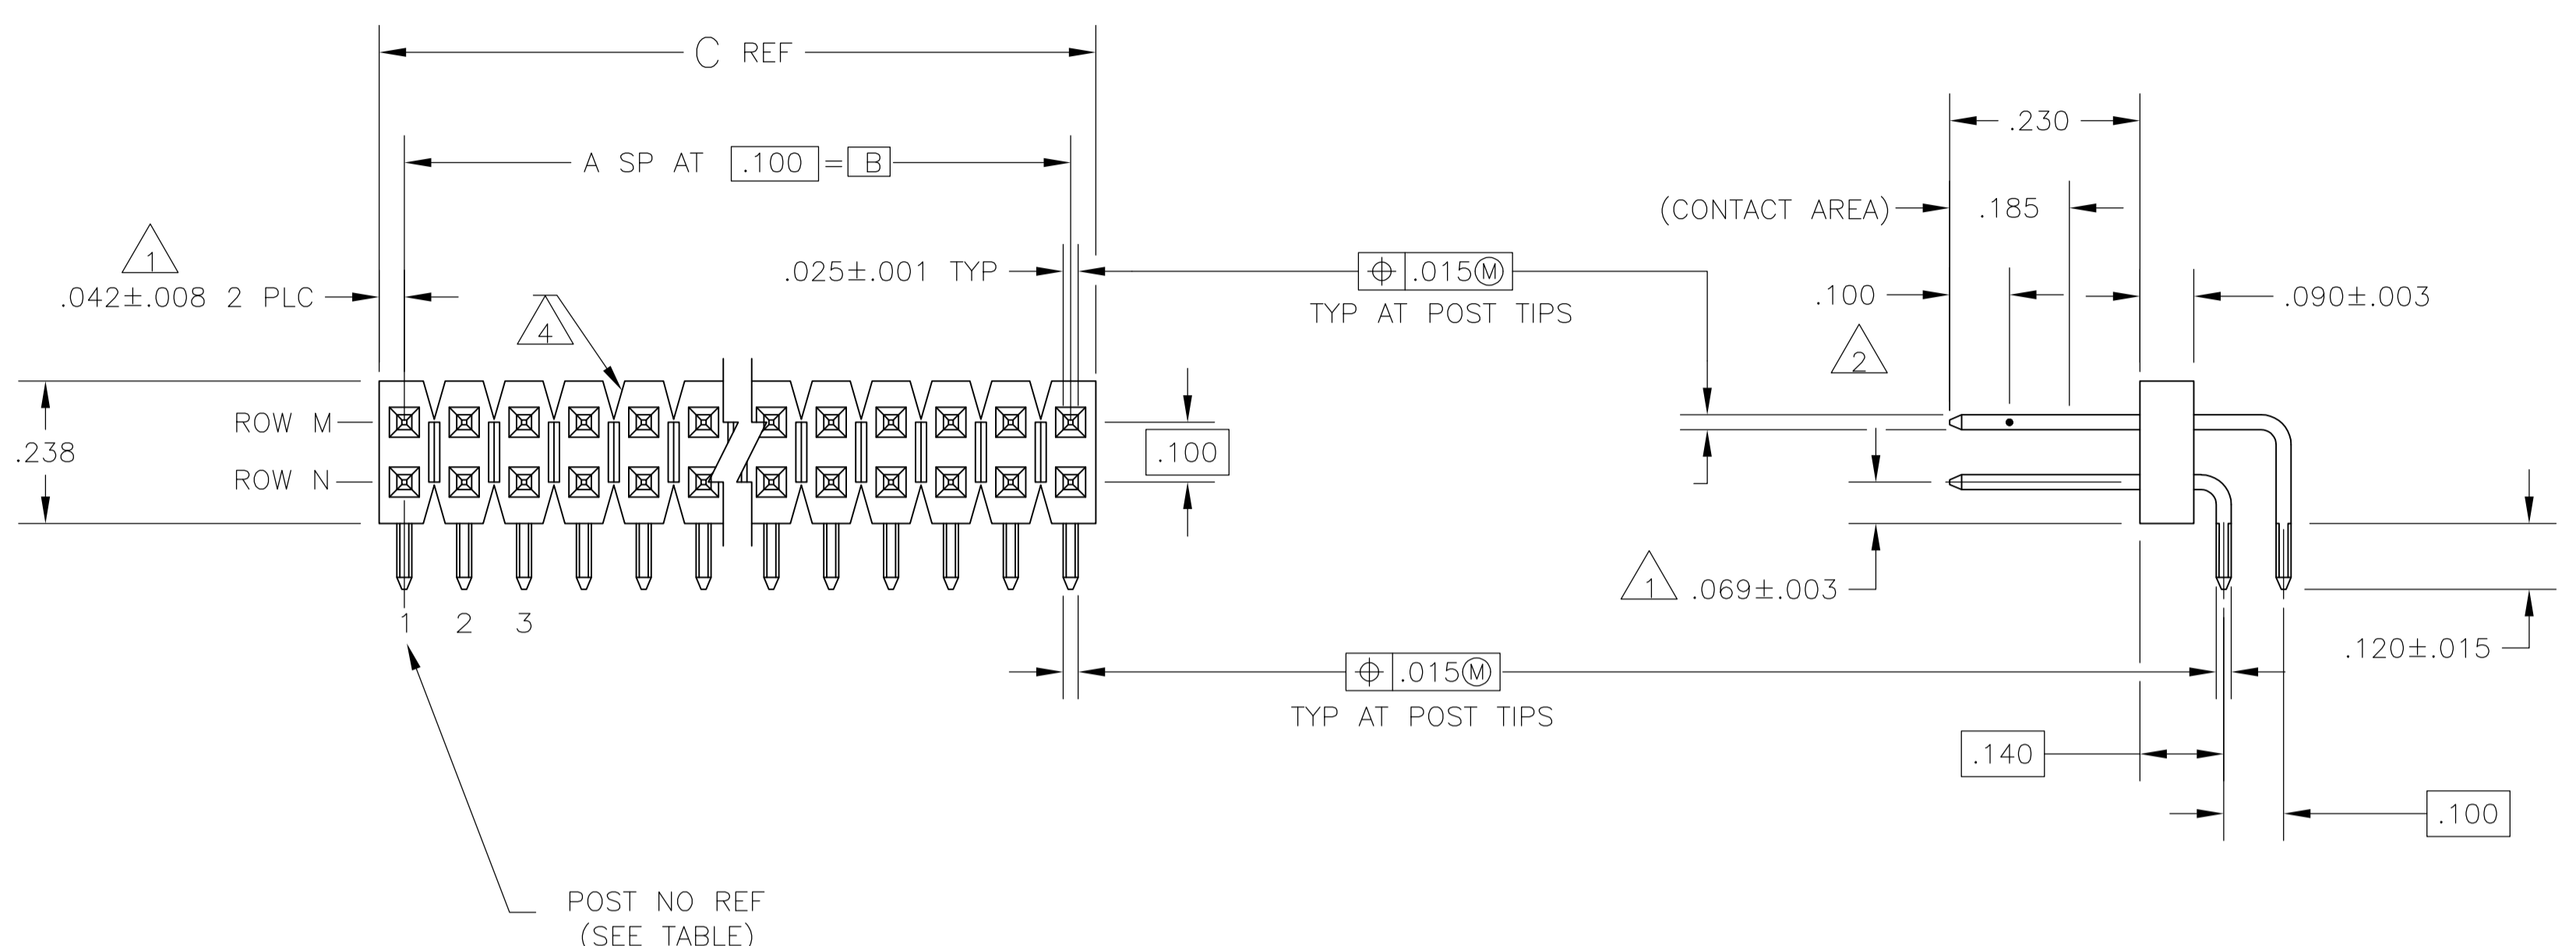

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3. FOR ACTIVE POSITION SIZES 4 AND ABOVE, POSTS WILL BE SELECTIVELY SWAGED TO PROVIDE CONNECTOR RETENTION TO THE PC BOARD UNTIL SOLDERED. FOR POSITION SIZE 2, POSTS WILL BE KINKED.(SEE TABLE FOR RETENTION FEATURE LOCATION)
- 4 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5 POSTS: .000015 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 6 POSTS: .000015 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 7 HIGH TEMPERATURE CONFIGURATION
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

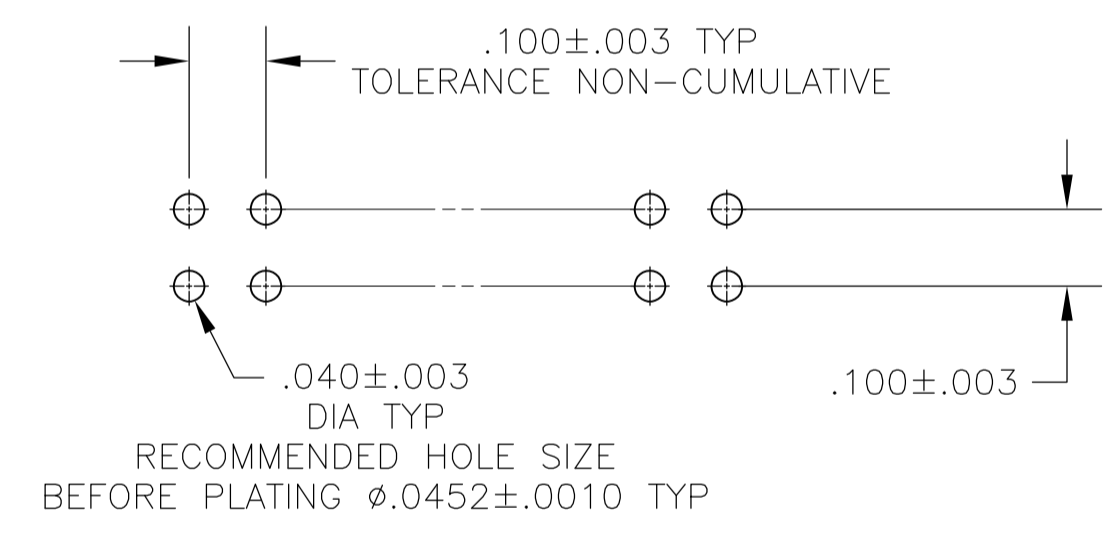

RECOMMENDED HOLE LAYOUT

7	6	1,2,39,40	1,2,39,40	3.984	3.900	39	80	7-104354-0
7	6	1,2,29,30	1,2,29,30	2.984	2.900	29	60	6-104354-9
7	6	1,2,24,25	1,2,24,25	2.484	2.400	24	50	6-104354-8
7	6	1,2,19,20	1,2,19,20	1.984	1.900	19	40	6-104354-7
7	6	1,2,16,17	1,2,16,17	1.684	1.600	16	34	6-104354-6
7	6	1,2,14,15	1,2,14,15	1.484	1.400	14	30	6-104354-5
7	6	1,2,13,14	1,2,13,14	1.384	1.300	13	28	6-104354-4
7	6	1,2,12,13	1,2,12,13	1.284	1.200	12	26	6-104354-3
7	6	1,2,11,12	1,2,11,12	1.184	1.100	11	24	6-104354-2
7	6	1,2,10,11	1,2,10,11	1.084	1.000	10	22	6-104354-1
7	6	1,2,9,10	1,2,9,10	.984	.900	9	20	6-104354-0
7	6	1,2,8,9	1,2,8,9	.884	.800	8	18	5-104354-9
7	6	1,2,7,8	1,2,7,8	.784	.700	7	16	5-104354-8
7	6	1,2,6,7	1,2,6,7	.684	.600	6	14	5-104354-7
7	6	1,2,5,6	1,2,5,6	.584	.500	5	12	5-104354-6
7	6	1,2,4,5	1,2,4,5	.484	.400	4	10	5-104354-5
7	6	1,2,3,4	1,2,3,4	.384	.300	3	8	5-104354-4
7	6	1,2,3	1,2,3	.284	.200	2	6	5-104354-3
7	6	1,2	1,2	.184	.100	1	4	5-104354-2
8	5	1,2,39,40	1,2,39,40	3.984	3.900	39	80	2-104354-0
8	5	1,2,29,30	1,2,29,30	2.984	2.900	29	60	1-104354-9
8	5	1,2,24,25	1,2,24,25	2.484	2.400	24	50	1-104354-8
8	5	1,2,19,20	1,2,19,20	1.984	1.900	19	40	1-104354-7
8	5	1,2,16,17	1,2,16,17	1.684	1.600	16	34	1-104354-6
8	5	1,2,14,15	1,2,14,15	1.484	1.400	14	30	1-104354-5
8	5	1,2,13,14	1,2,13,14	1.384	1.300	13	28	1-104354-4
8	5	1,2,12,13	1,2,12,13	1.284	1.200	12	26	1-104354-3
8	5	1,2,11,12	1,2,11,12	1.184	1.100	11	24	1-104354-2
8	5	1,2,10,11	1,2,10,11	1.084	1.000	10	22	1-104354-1
8	5	1,2,9,10	1,2,9,10	.984	.900	9	20	1-104354-0
8	5	1,2,8,9	1,2,8,9	.884	.800	8	18	104354-9
8	5	1,2,7,8	1,2,7,8	.784	.700	7	16	104354-8
8	5	1,2,6,7	1,2,6,7	.684	.600	6	14	104354-7
8	5	1,2,5,6	1,2,5,6	.584	.500	5	12	104354-6
8	5	1,2,4,5	1,2,4,5	.484	.400	4	10	104354-5
8	5	1,2,3,4	1,2,3,4	.384	.300	3	8	104354-4
8	5	1,2,3	1,2,3	.284	.200	2	6	104354-3
8	5	1,2	1,2	.184	.100	1	4	104354-2
8	5	1	1	.084	-	-	2	104354-1

REMARKS	PLATING	ROW N	ROW M	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
		HOLD-DOWN POST CONFIG LOCATION						
THIS DRAWING IS A CONTROLLED DOCUMENT.		DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR: BLACK POSTS: PHOS BRONZE		FINISH: SEE TABLE
DIN M PASTAL 2-4-88		CIR R FEIDT 2-9-88		APVD R FEIDT 2-9-88		NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, RIGHT ANGLE, DOUBLE, ROW, .100X.100 CL, .025 SQ POSTS WITH HOLD-DOWN CONFIGURATIONS		SCALE: 4:1 SHEET 1 OF 1 REV G1
CUSTOMER DRAWING		SIZE: A1		WEIGHT: -		DRAWING NO: 00779		SCALE: 4:1 SHEET 1 OF 1 REV G1