



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!






Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



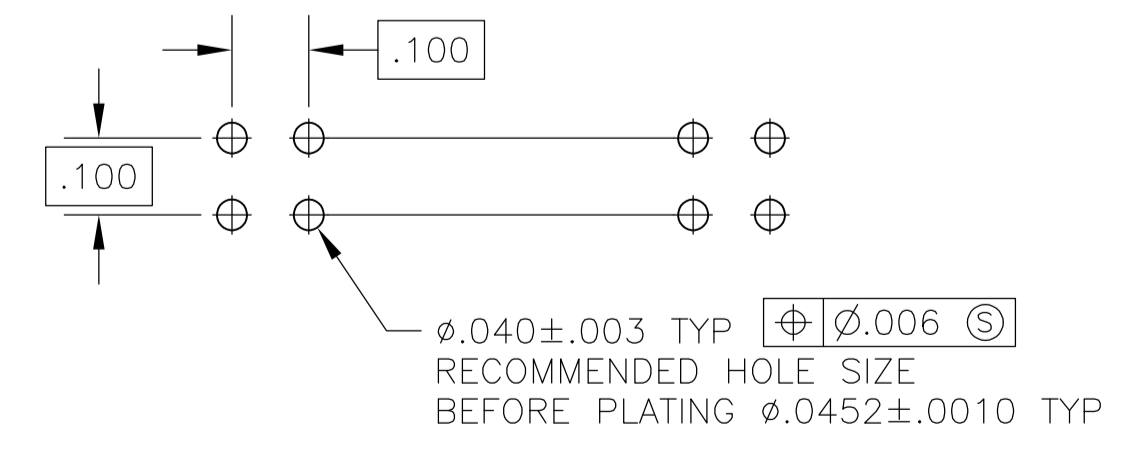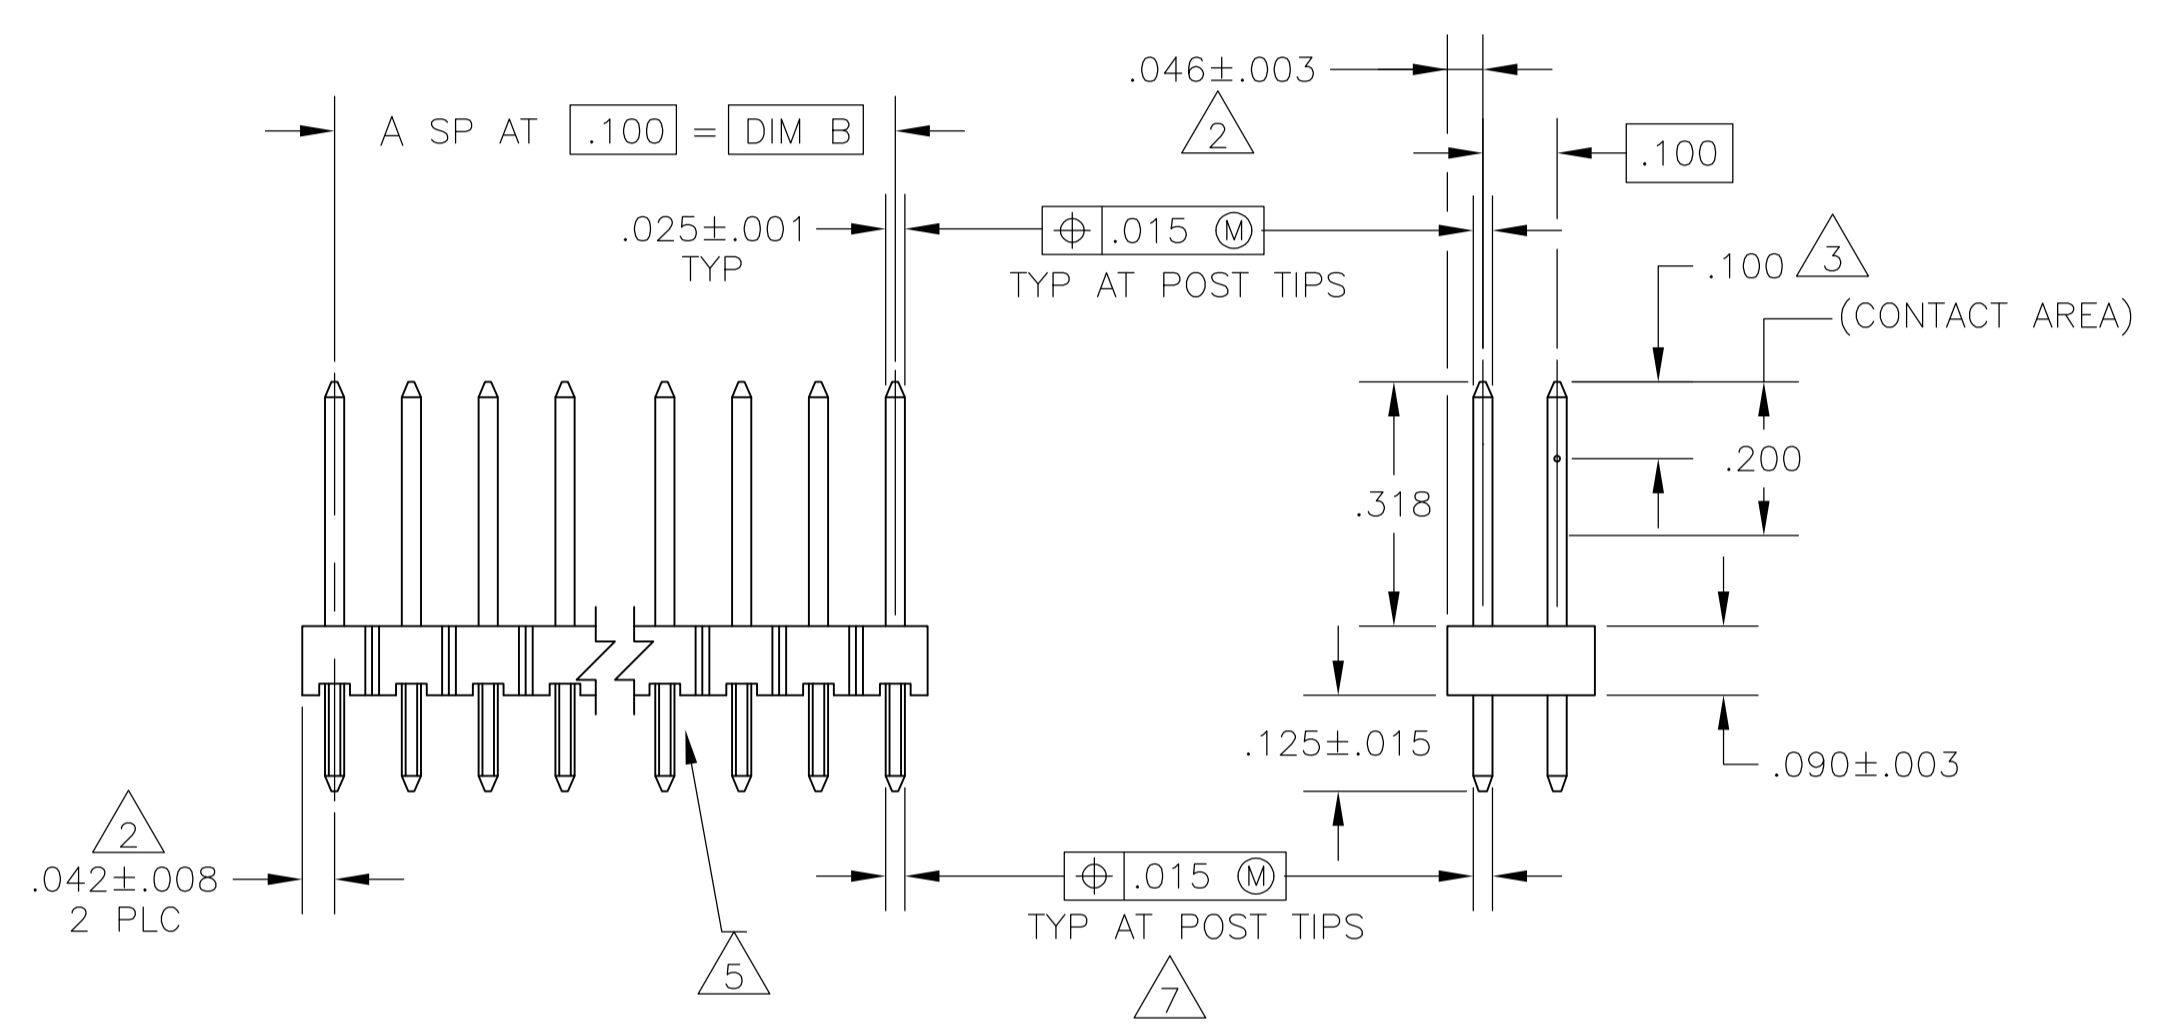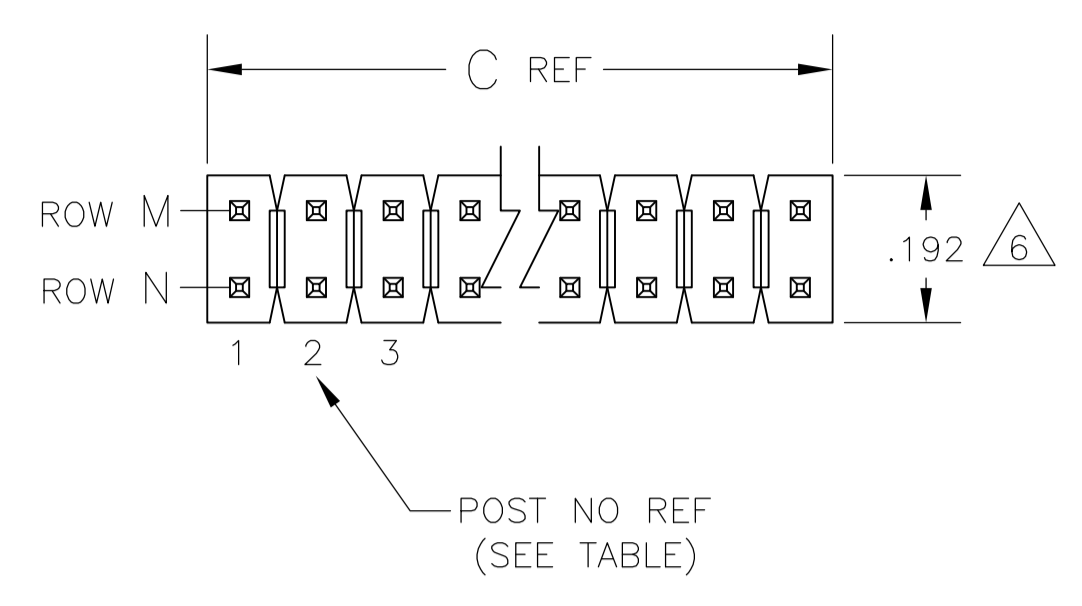

RECOMMENDED HOLE LAYOUT

1. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
2. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
3. POINT OF MEASUREMENT FOR PLATING THICKNESS.
4. OBSOLETE PART NUMBER.
5. RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
6. FOR 2 POSITION PART ONLY, THE NOTED DIMENSION IS .184
7. $\varnothing .020 \text{ (M)}$ FOR KINKED TAILS
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	3.284	3.200	32	66	2-104433-4
	1.784	1.700	17	36	2-104433-3
	3.484	3.400	34	70	2-104433-2
	2.184	2.100	21	44	2-104433-1
	3.984	3.900	39	80	2-104433-0
	2.484	2.900	29	60	1-104433-9
OBSOLETE	2.484	2.400	24	50	1-104433-8
	1.984	1.900	19	40	1-104433-7
OBSOLETE	1.684	1.600	16	34	1-104433-6
	1.484	1.400	14	30	1-104433-5
OBSOLETE	1.384	1.300	13	28	1-104433-4
	1.284	1.200	12	26	1-104433-3
OBSOLETE	1.184	1.100	11	24	1-104433-2
	1.084	1.000	10	22	1-104433-1
OBSOLETE	.984	.900	9	20	1-104433-0
	.884	.800	8	18	1-104433-9
OBSOLETE	.784	.700	7	16	1-104433-8
	.684	.600	6	14	1-104433-7
	.584	.500	5	12	1-104433-6
	.484	.400	4	10	1-104433-5
	.384	.300	3	8	1-104433-4
	.284	.200	2	6	1-104433-3
	.184	.100	1	4	1-104433-2
	.084	—	—	2	1-104433-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H MOLL	23JUN88	 TE Connectivity
DIMENSIONS: INCHES		CHK	R FEJDT	23JUN88	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R FEJDT	23JUN88	NAME
0. PLC	± -	PRODUCT SPEC			HEADER ASSY, MOD II,
1. PLC	± -	APPLICATION SPEC			BREAKAWAY, DBL ROW, 100X.100 C
2. PLC	± -	WEIGHT			VERT. .025 SQ POSTS, WITH RETENTION FEATURE
3. PLC	± .005	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
4. PLC	± -	A1	00779	104433	—
ANGLES	± -	CUSTOMER DRAWING		SCALE	4:1
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR: BLACK	FINISH: POSTS: .00015 GOLD IN CONTACT AREA .00100-.00200 WHITE TIN LEAD ON SOLDER TAIL, ALL OVER .00050 NICKEL	SHEET		1	REV
POST: PHOSPHOR BRONZE		SHEET		1	REV