



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





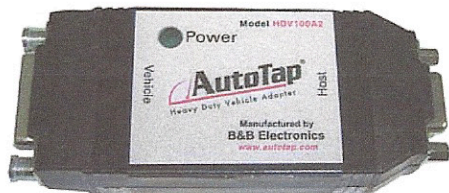

## **Model HDV100A2 J1708 and J1939 RS-232 Converter**

The B&B Electronics AutoTap™ Model HDV100A2 connects your PC or laptop to the J1708/J1587 and J1939 bus found on most heavy-duty vehicles.

The HDV100A2 follows a simple operational protocol to communicate to the J1708 and J1939 bus. The HDV100A2 solves timing problems encountered when operating in the Windows environment. An embedded microprocessor handles buffering and timing for the bus, thereby reducing bus collisions. This allows your data to access the bus with a much greater degree of precision than a non-intelligent interface adapter.

The HDV100A2 also features a "dumb mode". In this mode the HDV100A2 operates simply as a byte shifter and uses the CTS line to signal a bus idle condition. This feature allows software applications designed to run with non-intelligent adapters, such as B&B Electronics model 232SAER, to work with the HDV100A2.

Accessory cabling is available (see the following B&B cable models) for the HDV100A2 to make connections to the PC or laptop as well as the J1708/J1587 bus.

Model D6D15M ..... DB15 male to Deutsch 6-pin cable, 40 in (1.0 m)  
Model D9D15M ..... DB15 male to Deutsch 9-pin cable, 40 in (1.0 m)  
Model 9PAMF6B ..... DB9 male to DB9 female cable, 6 ft (1.8 m)

### **Specifications**

Dimensions:	4.1 x 1.7 x 0.8 in (104.1 x 43.2 x 20.3 mm)
RS-232 Connection:	DB9 female, DCE
Bus Connection:	DB15 female
Pins 6, 7:	Ground
Pin 8:	Power
Pins 12, 13:	CAN low, CAN high
Pins 14, 15:	J1708-, J1708+
Operating Temperature:	-40 to 85 °C (-40 to 185 °F)
Input Voltage:	10 to 42 VDC
Input Current @12 VDC:	50 mA typical, 134 mA max