



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HE1G Basic Grip Enabling Switch

Key features:

- 3 position functionality (Off – On – Off) as required for manual robotic control
- Ideally suited for use as an enabling (aka “deadman”) switch for robotic cells
- Provides a high level of safety based on human behavioral studies that determine personnel may squeeze OR let go when presented with a panic situation
- Contacts will not re-close when released from Off → On (3 → 1) (per IEC60204-1; 9.2.5.8)
- Optional E-Stop switch built in
- Connection for conduit and cable strain relief built in
- IP66 waterproof sealing
- Meets ANSI RIA 15.06 robotics standards
- Optional momentary pushbutton or E-Stop built in




Part Numbers


Contact Configuration			Rubber Boot	Part No.
3-position Switch	Monitor Switch	Pushbutton		
2 contacts	With (1NC)	–	Silicon Rubber / yellow	HE1G-21SM
		–	NBR/PVC Polyblend / gray	HE1G-21SM-1N
	Without	Momentary Pushbutton (1NO) (1NO: AB6M-M1PB)	Silicon Rubber / yellow	HE1G-21SMB
			NBR/PVC Polyblend / gray	HE1G-21SMB-1N
		Emergency Stop Switch (2NC) (2NC: HA1E-V2S2R)	Silicon Rubber / yellow	HE1G-20ME
			NBR/PVC Polyblend / gray	HE1G-20ME-1N
Momentary Pushbutton (2NO) (2NO: AB6M-M2PB)	Silicon Rubber / yellow	HE1G-20MB		
	NBR/PVC Polyblend / gray	HE1G-20MB-1N		

Accessories

Replacement Rubber Cover

Appearance	Part Number	Material	Color
	HE9Z-GBK1	Silicon Rubber	Yellow
	HE9Z-GBK1-1N	NBR/PVC	Gray

Mounting Plate (secures grip switch)

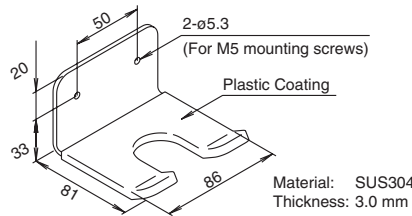Appearance	Part Number	Material
	HE9Z-GH1	Metal

Specifications

Conforming to Standards	UL508 (UL listed), CSA C22.2, No. 14 (c-UL listed), IEC/EN 60947-5-1 (TÜV/BG approval), GS-ET-22 (TÜV/BG approval)
Applicable Standards	ISO 12100-1, -2, EN12100-1, -2, IEC 60204-1 / EN 60204-1, ISO11161 / prEN11161, ISO 10218 / EN 775, ANSI/RIA R15.06, ANSI B11.19
Operating Temperature	–25 to +60°C (no freezing)
Operating Humidity	45 to 85% RH maximum (no condensation)
Storage Temperature	–40 to +80°C (no freezing)
Pollution Degree	3
Contact Resistance	100mΩ maximum
Insulation Resistance	Between live & dead metal parts: 100MΩ maximum Between positive & negative live parts: 100MΩ minimum

Specifications con't

Impulse Withstand Voltage		2.5kV
Operating Frequency		1200 operations/hour
Mechanical Life		Position 1→2→1: 1,000,000 operations minimum
		Position 1→2→3→1: 100,000 operations minimum
Electrical Life		100,000 minimum at rated load
Shock Resistance	Operating Extremes	150m/s ² (15 G)
	Damage Limits	1000m/s ² (100 G)
Vibration Resistance	Operating Extremes	5 to 55Hz, amplitude 0.5mm minimum
	Damage Limits	16.7Hz, amplitude 1.5mm minimum
Recommend Wire Size		0.14 to 1.5mm ² (24AWG - 16AWG)
Recommend Cable Size		ø7 to 13mm
Conduit Size		M20
Terminal Pulling Strength		20N minimum
Terminal Screw Torque		0.5 to 0.6Nm
Degree of Protection		HE1G-21SM: IP66, HE1G-20MB: IP65
		HE1G-20ME: IP65, HE1G-21SMB: IP65
Conditional Short Circuit Current		50A (250V)
Recommended Short Circuit Protection		250V/10A fast blow fuse (IEC 60127-1)
Weight (approx.)		HE1G-21SM: 210g
		HE1G-20ME: 250g
		HE1G-20MB/HE1G-21SMB: 220g

Contact Ratings

Rated Insulation Voltage (Ui)		250V				
Thermal Current (Ith)		3A				
Rated Operating Voltage (Ue)		30V	125V	250V		
Rated Operating Current (Ie)	3 Position Switch (Terminal No.1-2, 3-4)	AC	Resistive Load (AC-12)	–	3A	1.5A
			Inductive Load (AC-15)	–	1.5A	0.75A
		DC	Resistive Load (DC-12)	2A	0.4A	0.2A
			Inductive Load (DC-13)	1A	0.22A	0.1A
	Monitor Switch (Terminal No. 5-6 of HE1G-21SM)	AC	Resistive Load (AC-12)	–	2A	1A
			Inductive Load (AC-15)	–	1A	0.5A
		DC	Resistive Load (DC-12)	2A	0.4A	0.2A
			Inductive Load (DC-13)	1A	0.22A	0.1A
	Emergency Stop Pushbutton (Terminal No. 5-6, 7-8 of HE1G-20ME)	AC	Resistive Load (AC-12)	–	–	–
			Inductive Load (AC-15)	–	–	0.5A
		DC	Resistive Load (DC-12)	–	–	–
			Inductive Load (DC-13)	–	–	0.1A
Contact Configuration	3 Position Switch		2 Contacts			
	Monitor Switch		0 or 1 Contact			
	Emergency Stop Pushbutton		0 or 2 Contacts			
	Momentary Pushbutton		0 to 2 contacts			



The minimum load (reference) = AC/DC3V • 5mA (for reference only).

Operating Characteristics
Contact Movement

Overview

XW Series E-Stops





Interlock Switches

Enabling Switches

Safety Control Relays

Light Curtains

AS-Interface Safety at Work

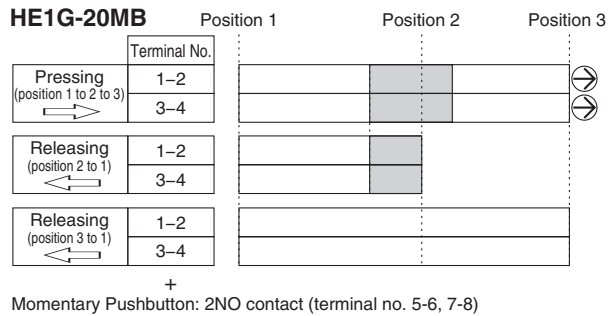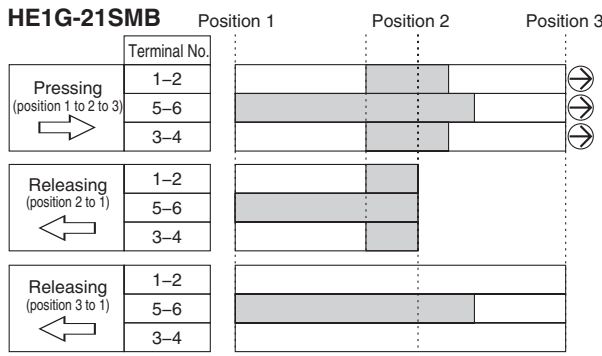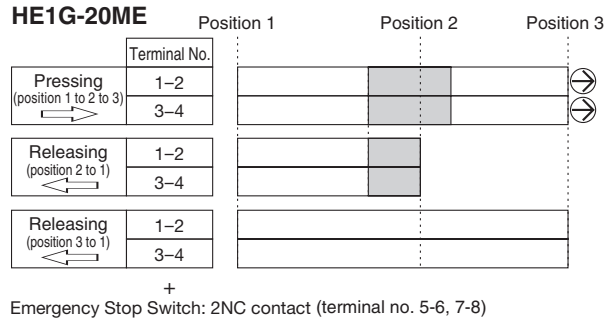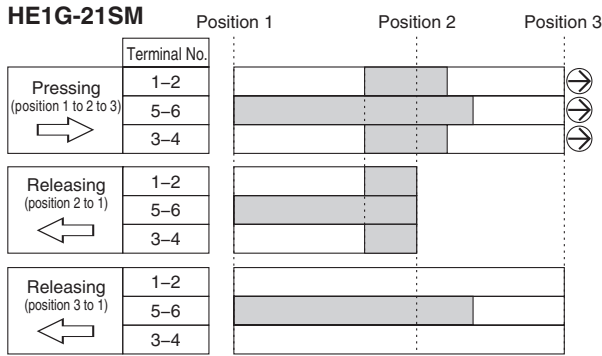

+
Momentary Pushbutton: 1NO contact (terminal no. 7-8)


■ : contact ON (closed) □ : contact OFF (open)



Notes:

1. 3-position switches operate with direct opening action (↻) when shifting from position 2 to position 3.
2. For the output of the enabling device, use terminals 1-2 and 3-4.
3. The above operation characteristics show when the center of the button is pressed. Pressing the edge of a button turns on one contact earlier than the other contact, causing a delay in operation.

Dimensions (mm)

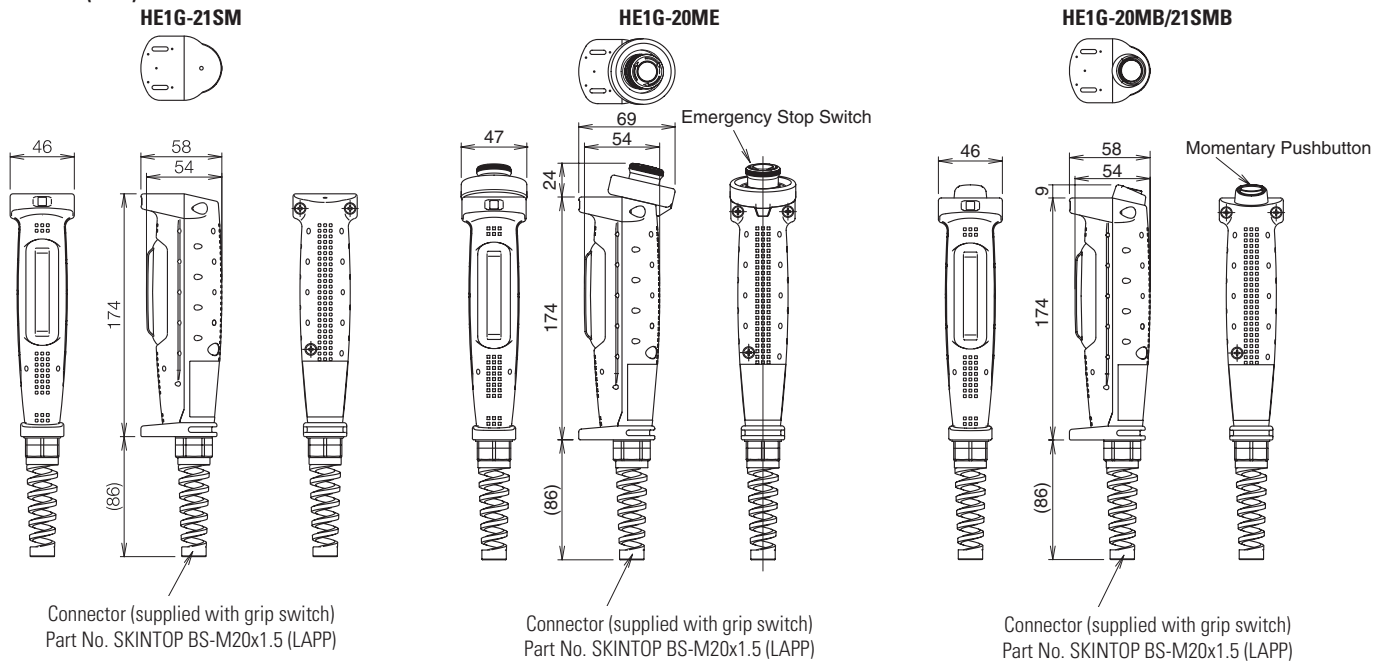


Wiring Precautions

HE1G


- Wire Stripping Information

Wire Length	Terminal Number 1-4	Terminal Number 5-8
L1, L2 (mm)	L1=40mm	L2=27mm
L3 (mm)	L3=6mm	

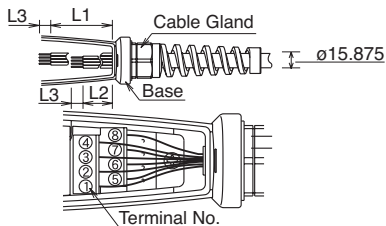

- Applicable Wire Size: 0.14 to 1.5mm² (24 - 16AWG, one wire per terminal)

- Recommended Torque

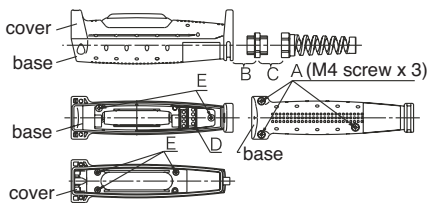

	See Drawing Above	Recommended Torque
Rubber Boot & Base	A	1.2±0.1Nm
Connector & Grip Switch	B	4.0±0.3Nm
Connector	C	4.0±0.3Nm
Terminal Screw	D	0.5±0.6Nm
Do Not Remove	E	