



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!







## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



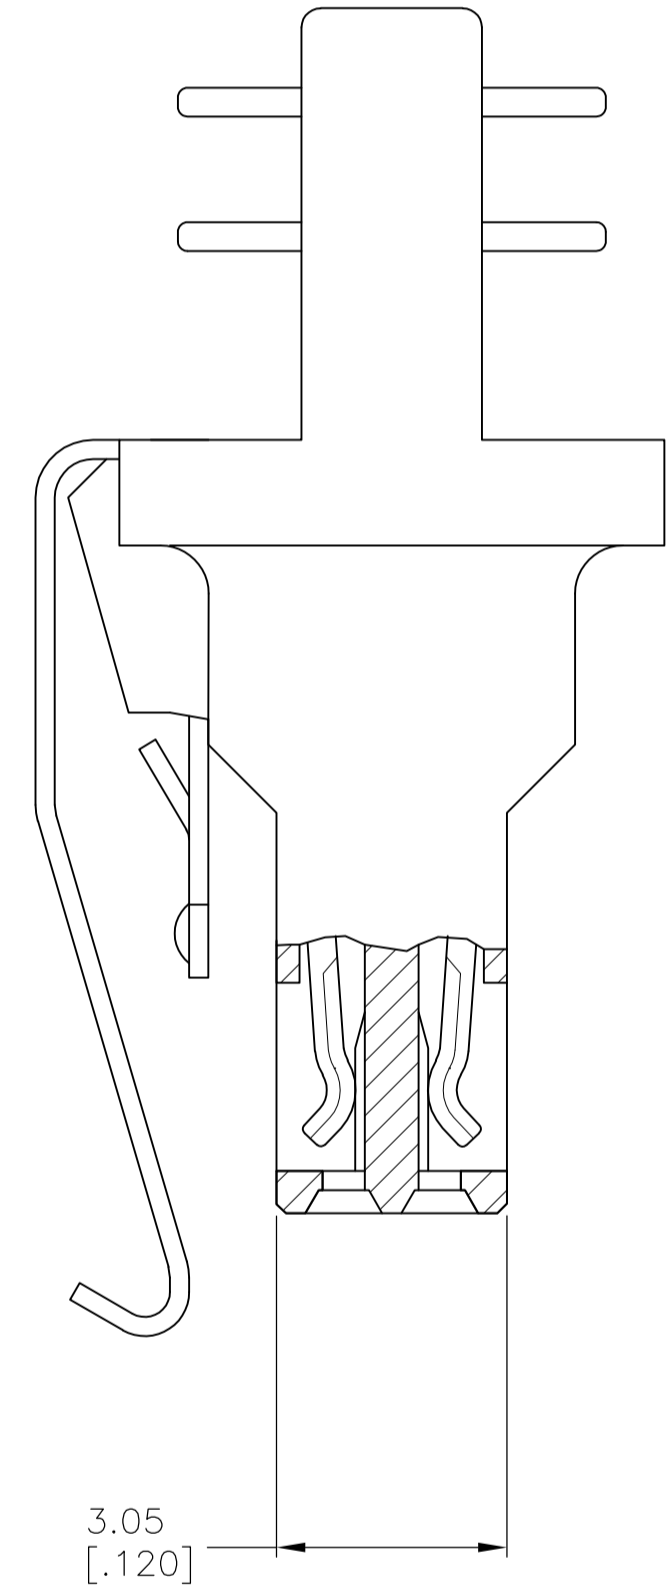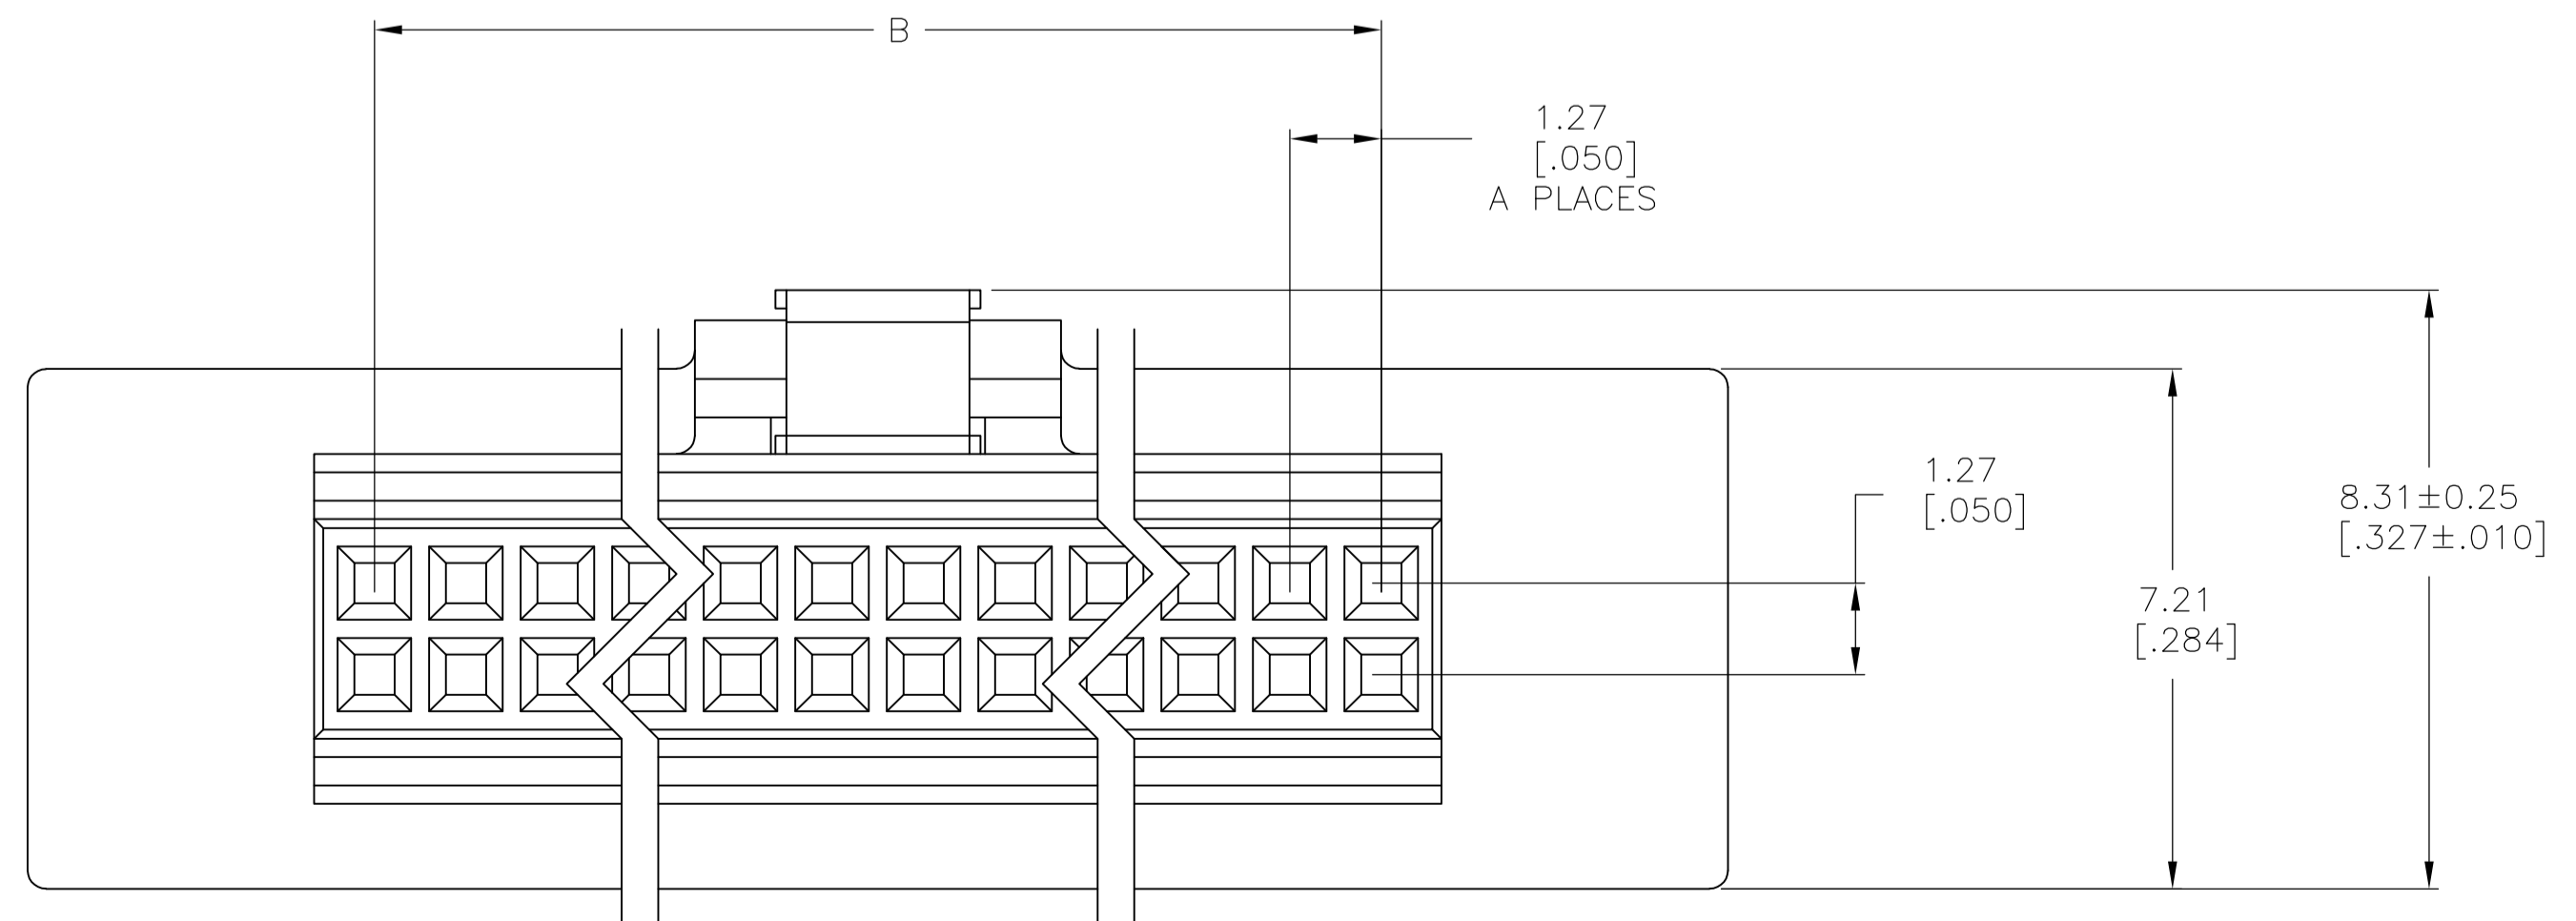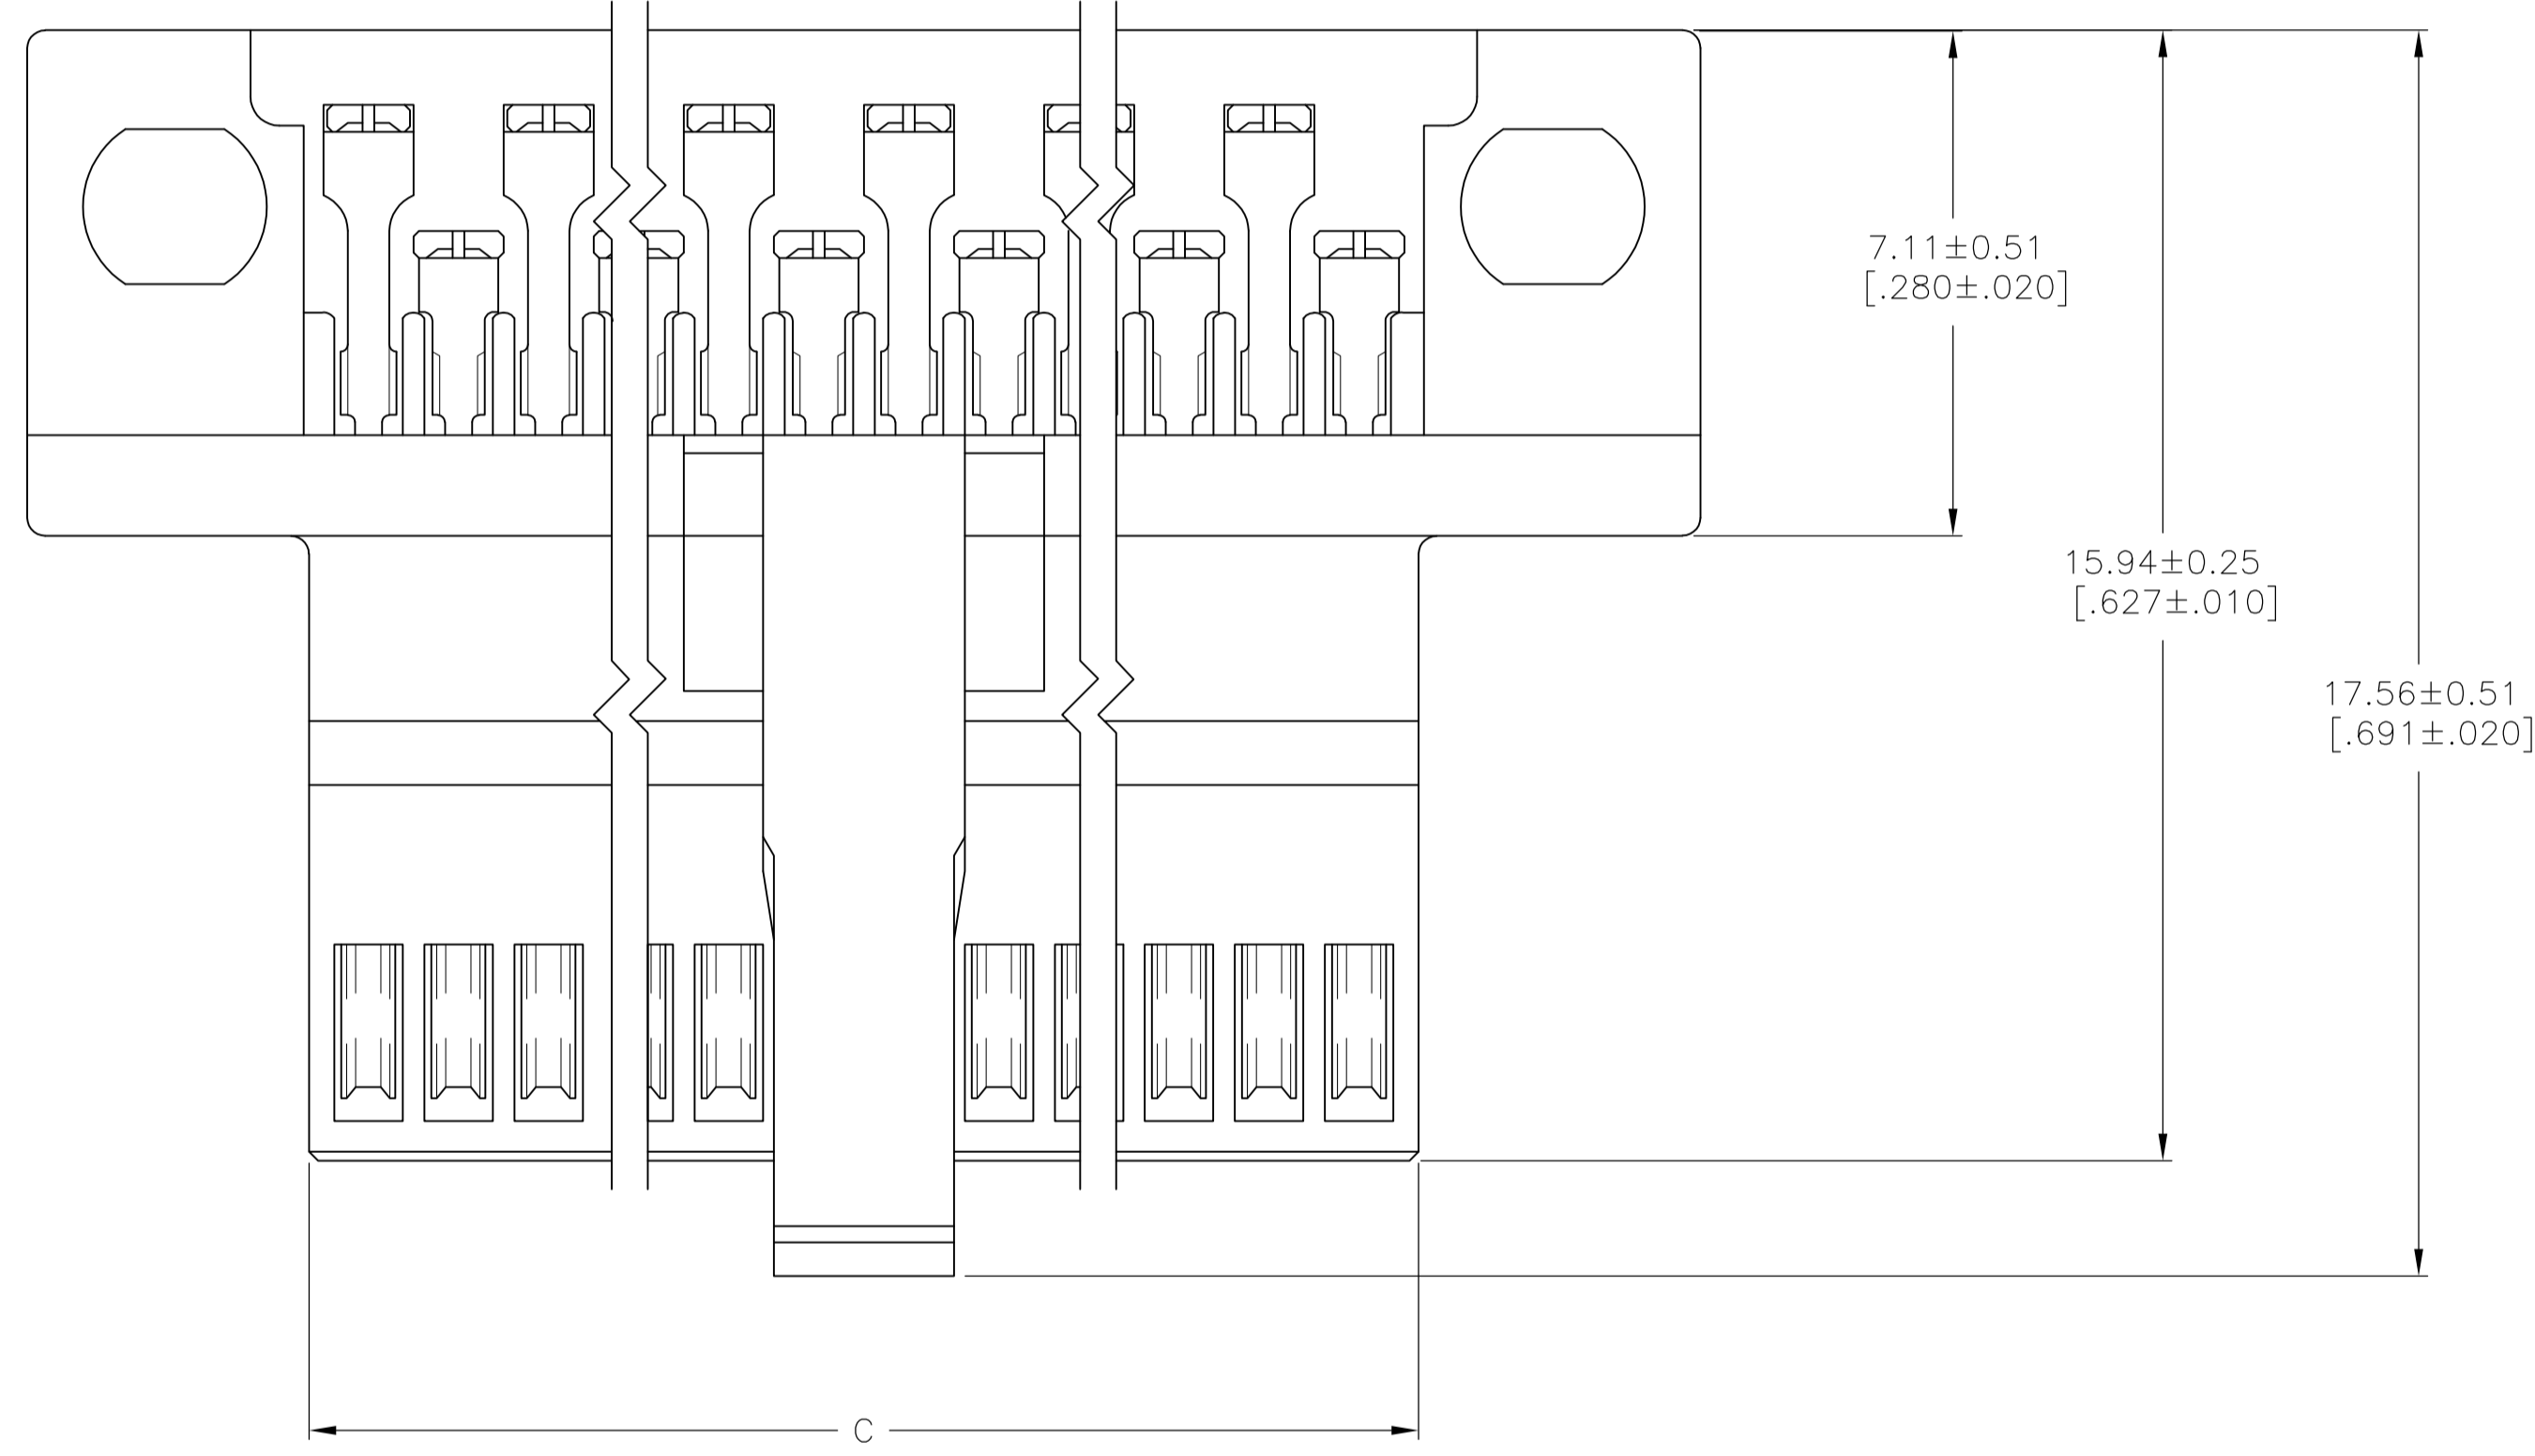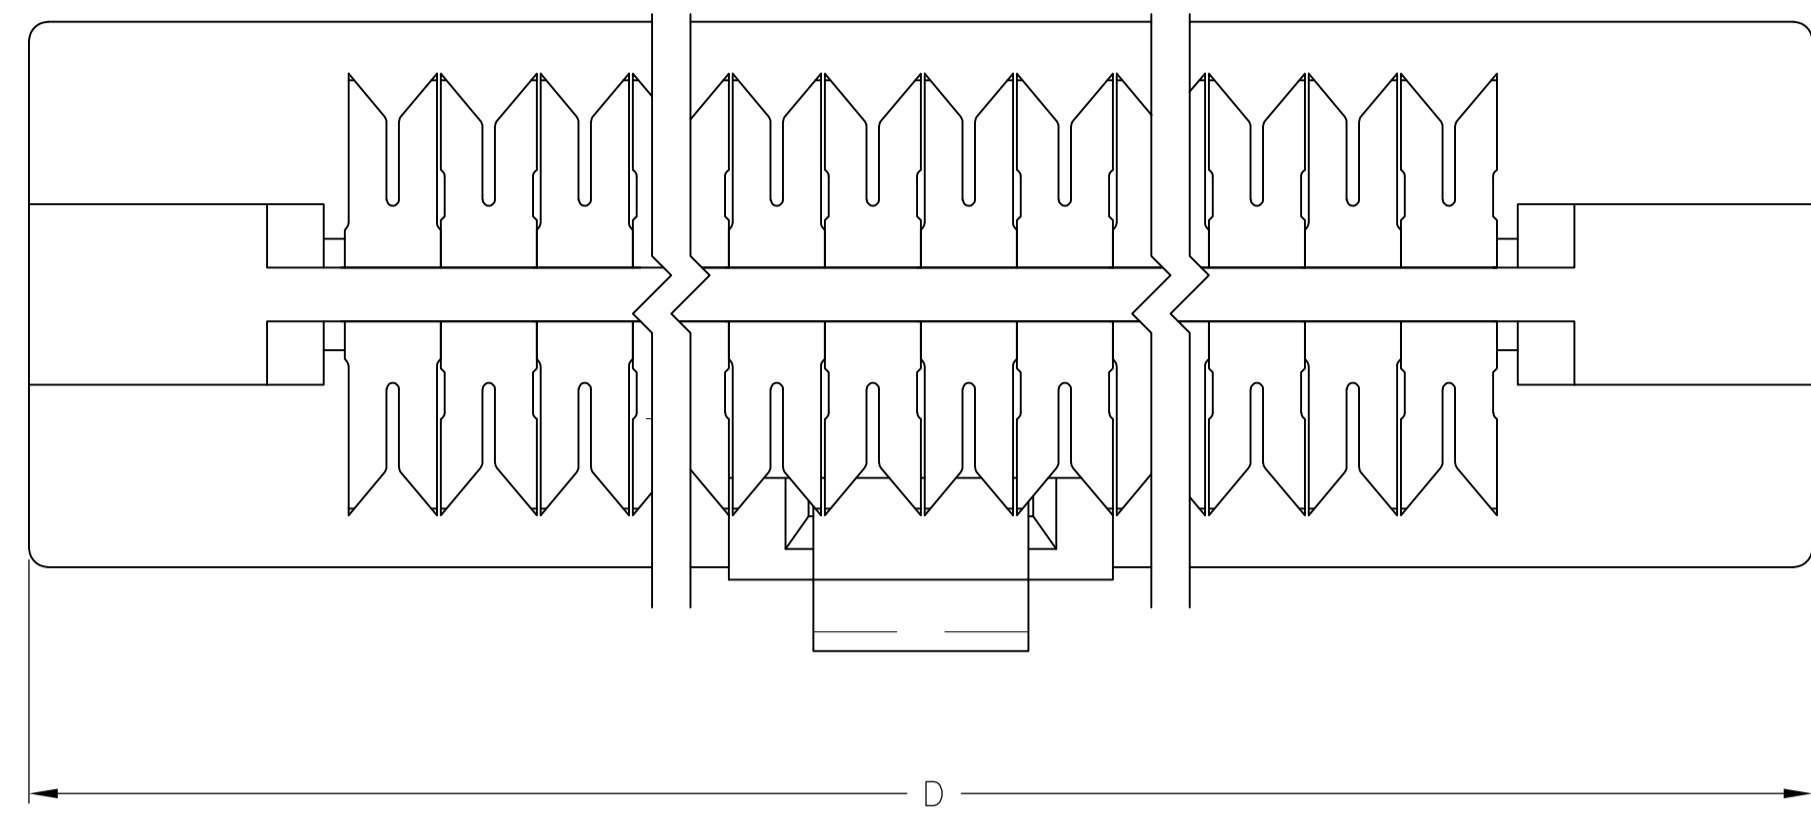

- 1 MATERIAL:  
RECEPTACLE CONTACTS- PHOSPHOR BRONZE  
RECEPTACLE HOUSING AND TERMINATING COVERS- THERMOPLASTIC,  
COLOR: BLACK.
- 2 PLATING:  
RECEPTACLE CONTACTS- 0.00076 [.000030] MINIMUM GOLD PLATE IN CONTACT AREA,  
0.00127 [.000050] MINIMUM BRIGHT TIN-LEAD PLATE IN TERMINATION AREA,  
ALL OVER 0.00127 [.000050] MINIMUM NICKEL.
- 3 RECOMMENDED WIRE:  
28 AWG- 0.91 [.036] MAX O.D. PVC OR POLYETHYLENE INSULATION.
- 4 SHORT-LONG CONTACT SEQUENCE MUST ALTERNATE BUT MAY BEGIN WITH EITHER  
A SHORT OR LONG CONTACT.
- 5 PLATING:  
RECEPTACLE CONTACTS- 0.00076 [.000030] MINIMUM GOLD PLATE IN CONTACT AREA,  
0.00127 [.000050] MINIMUM MATTE TIN PLATE IN TERMINATION AREA,  
ALL OVER 0.00127 [.000050] MINIMUM NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE 6 5	71.83 [2.828]	63.91 [2.516]	62.23 [2.450]	49	100	-6-104892-0
OBSOLETE 6 5	65.48 [2.578]	57.56 [2.266]	55.88 [2.200]	44	90	-5-104892-9
5	59.13 [2.328]	51.21 [2.016]	49.53 [1.950]	39	80	5-104892-8
5	52.78 [2.078]	44.86 [1.766]	43.18 [1.700]	34	70	5-104892-7
OBSOLETE 6 5	46.43 [1.828]	38.51 [1.516]	36.83 [1.450]	29	60	-5-104892-6
5	40.08 [1.578]	32.16 [1.266]	30.48 [1.200]	24	50	5-104892-5
5	33.73 [1.328]	25.81 [1.016]	24.13 [.950]	19	40	5-104892-4
5	27.38 [1.078]	19.46 [.766]	17.78 [.700]	14	30	5-104892-3
5	21.03 [.828]	13.11 [.516]	11.43 [.450]	9	20	5-104892-2
OBSOLETE 6 5	14.68 [.578]	6.76 [.266]	5.08 [.200]	4	10	-5-104892-1
OBSOLETE 6	71.83 [2.828]	63.91 [2.516]	62.23 [2.450]	49	100	1-104892-0
OBSOLETE 6	65.48 [2.578]	57.56 [2.266]	55.88 [2.200]	44	90	104892-9
	59.13 [2.328]	51.21 [2.016]	49.53 [1.950]	39	80	104892-8
	52.78 [2.078]	44.86 [1.766]	43.18 [1.700]	34	70	104892-7
OBSOLETE 6	46.43 [1.828]	38.51 [1.516]	36.83 [1.450]	29	60	104892-6
	40.08 [1.578]	32.16 [1.266]	30.48 [1.200]	24	50	104892-5
	33.73 [1.328]	25.81 [1.016]	24.13 [.950]	19	40	104892-4
	27.38 [1.078]	19.46 [.766]	17.78 [.700]	14	30	104892-3
	21.03 [.828]	13.11 [.516]	11.43 [.450]	9	20	104892-2
OBSOLETE 6	14.68 [.578]	6.76 [.266]	5.08 [.200]	4	10	104892-1
	D	C	B	A	NO OF POSN	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: J. HERRINGTON 6-18-93  
CHK: P. SREMCICH 6-24-93

STE TE Connectivity

PRODUCT SPEC: AMPMODU 108-1443  
APPLICATION SPEC: 50/50 GRID CABLE CONN. ASSY WITH LATCH

SIZE: A1 CAGE CODE: 00779C DRAWING NO: 104892

WEIGHT: -

CUSTOMER DRAWING SCALE: 10:1 SHEET: 1 of 1 REV: G1