



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832




Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER APPROVED:

DATE:

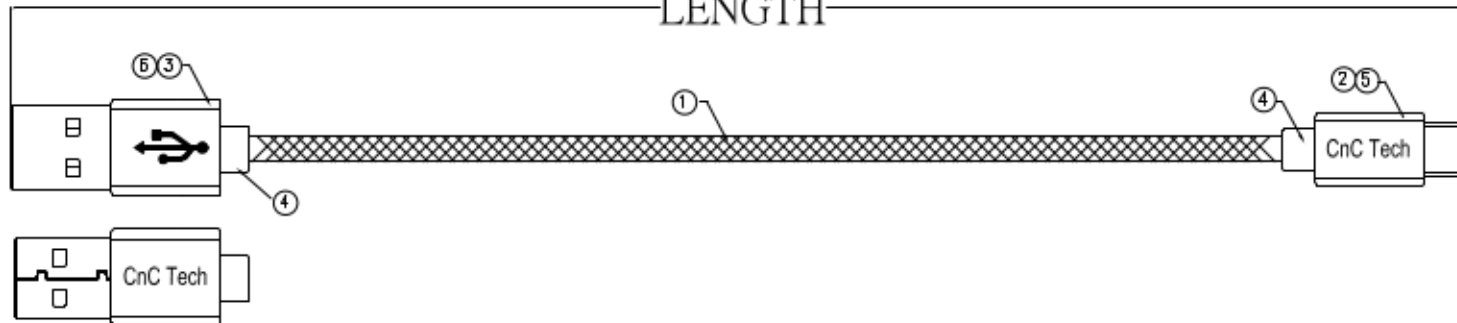


P/N :	SPECIFICATIONS	LENGTH
105-1032-SV-B0050	USB2.0 A TO C, SILVER L=0.5m	500±50
105-1032-SV-B0100	USB2.0 A TO C, SILVER L=1.0m	1000±50
105-1032-SV-B0150	USB2.0 A TO C, SILVER L=1.5m	1500±50
105-1032-SV-B0200	USB2.0 A TO C, SILVER L=2.0m	2000±50

P/N :	SPECIFICATIONS	LENGTH
105-1032-BL-B0050	USB2.0 A TO C, BLACK L=0.5m	500±50
105-1032-BL-B0100	USB2.0 A TO C, BLACK L=1.0m	1000±50
105-1032-BL-B0150	USB2.0 A TO C, BLACK L=1.5m	1500±50
105-1032-BL-B0200	USB2.0 A TO C, BLACK L=2.0m	2000±50

P/N :	SPECIFICATIONS	LENGTH
105-1032-RE-B0050	USB2.0 A TO C, LIGHT RED L=0.5m	500±50
105-1032-RE-B0100	USB2.0 A TO C, LIGHT RED L=1.0m	1000±50
105-1032-RE-B0150	USB2.0 A TO C, LIGHT RED L=1.5m	1500±50
105-1032-RE-B0200	USB2.0 A TO C, LIGHT RED L=2.0m	2000±50

1. Wiring Diagram

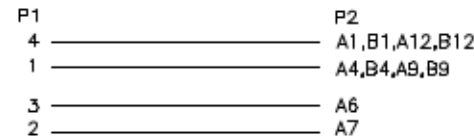

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 3 ohm
- Hi Spot DC 300V / 1 sec

NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	REV	ECN#	DESCRIPTION	DATE
6	COVER	USB AM ALUMINUM SHELL	1			A	20140703 INITIAL RELEASE	2018/04/23
5	COVER	TYPE C ALUMINUM SHELL	1					
4	PVC	30P PVC WHITE INNER MOLD	18.5g					
3	CONN	USB2.0 A/M G/F	1	P1				
2	CONN	TYPE C 2.0 MALE G/F BLACK W/PCB+R+C	1	P2				
1	CABLE	(34/0.1BC)*2C+(7/0.1BC)*2COD:3.8mm cotton net	1	LENGTH				
BILL OF MATERIAL								

CnC Tech, LLC		TITLE	USB 3.1 TYPE C/M to A/M, BRAIDED	
DRAWN	DATE	DWN NO.	E18005-B	
edwin	4/22	CUSTOMER P/N:	105-1032-B-0XXX	
CHECKED		CUSTOMER:		
APPROVAL		SHEET 1 OF 1		