



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



GaAs MMIC FUNDAMENTAL MIXER, 7 - 14 GHz




Typical Applications

The HMC-C049 is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios
- Test Equipment & Sensors
- Military End-Use

Functional Diagram

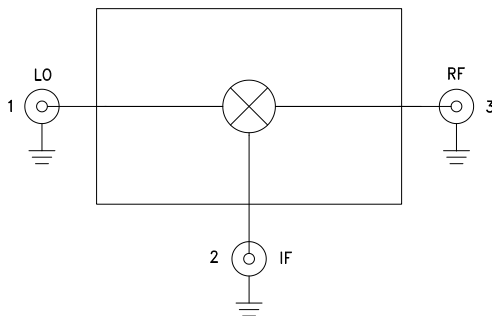

Features

- Passive Double Balanced Topology
- High LO/RF Isolation: 48 dB
- Low Conversion Loss: 7 dB
- Wide IF Bandwidth: DC - 5 GHz
- Robust 1,000V ESD, Class 1C
- Hermetic Module

General Description

The HMC-C049 is a 7 - 14 GHz double balanced mixer which provides a low conversion loss, high isolation, and a wide IF bandwidth. This mixer does not require a DC bias and can operate with an LO power level of +9 dBm. The package is a hermetically sealed module that is assembled and tested to meet MIL-883-STD qualifications.

This product comes standard with three female SMA field replaceable connectors that can also be interchanged with blind mate SMP connectors or detached to allow direct connection of the I/O Pins to a microstrip or coplaner circuit.

Electrical Specifications, $T_A = +25^\circ \text{C}$, $IF = 100 \text{ MHz}$, $LO = +13 \text{ dBm}^*$

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range, RF & LO	7 - 11		11 - 14				GHz
Frequency Range, IF	DC - 5		DC - 5				GHz
Conversion Loss		7	9.5		8	11	dB
Noise Figure (SSB)		7			8		dB
LO to RF Isolation	37	48		35	45		dB
LO to IF Isolation	27	35		32	40		dB
RF to IF Isolation	12	22		22	30		dB
IP3 (Input)		18			20		dBm
IP2 (Input)		48			47		dBm
1 dB Compression (Input)		11			12		dBm

*Unless otherwise noted, all measurements performed as downconverter, $IF = 100 \text{ MHz}$.

HMC-C049* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

COMPARABLE PARTS

View a parametric search of comparable parts.

DOCUMENTATION

Data Sheet

- HMC-C049 Data Sheet

DESIGN RESOURCES

- HMC-C049 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

DISCUSSIONS

View all HMC-C049 EngineerZone Discussions.

SAMPLE AND BUY

Visit the product page to see pricing options.

TECHNICAL SUPPORT

Submit a technical question or find your regional support number.


DOCUMENT FEEDBACK

Submit feedback for this data sheet.




**GaAs MMIC FUNDAMENTAL
MIXER, 7 - 14 GHz**


**Conversion Gain vs. Temperature
@ LO = +13 dBm**

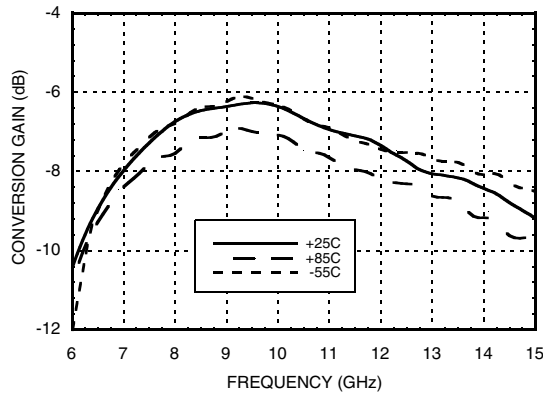


Isolation @ LO = +13 dBm

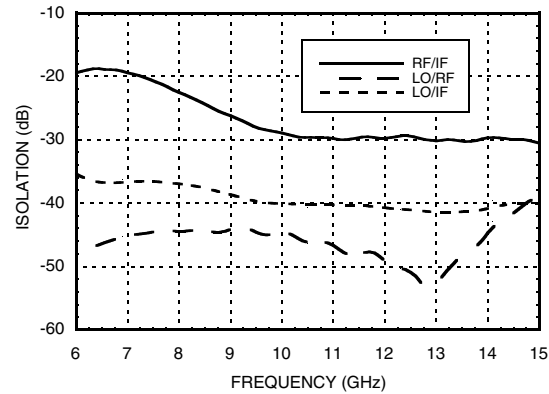


Conversion Gain vs. LO Drive

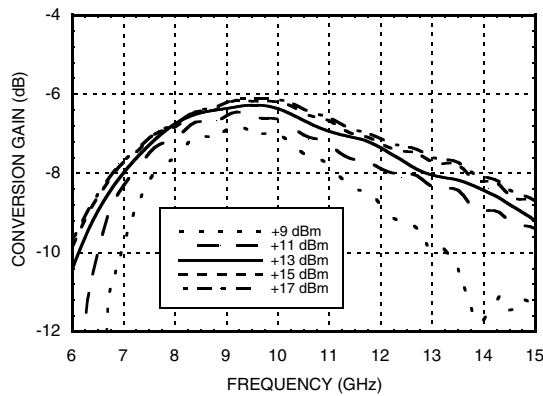


Return Loss @ LO = +13 dBm

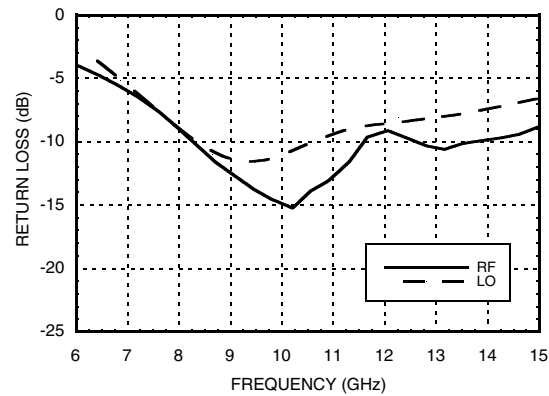

IF Bandwidth @ LO = +13 dBm

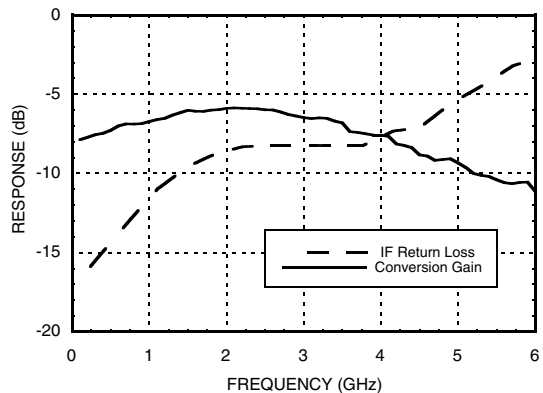

**Upconverter Performance
Conversion Gain vs. LO Drive**

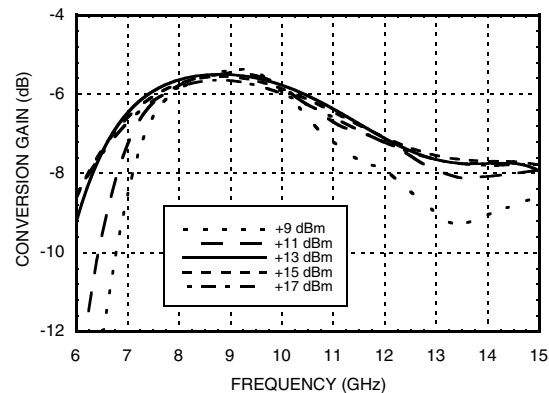


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




GaAs MMIC FUNDAMENTAL MIXER, 7 - 14 GHz


Input IP3 vs. LO Drive *

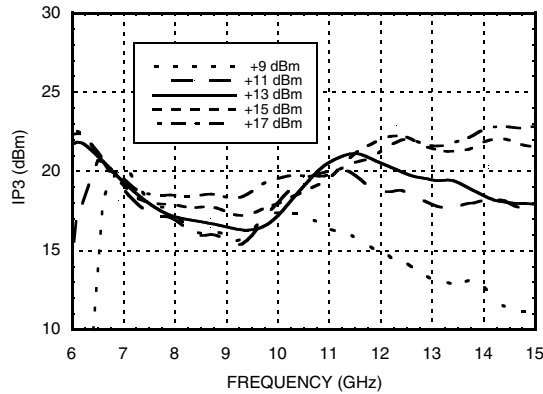


Input IP3 vs. Temperature @ LO = +13 dBm *

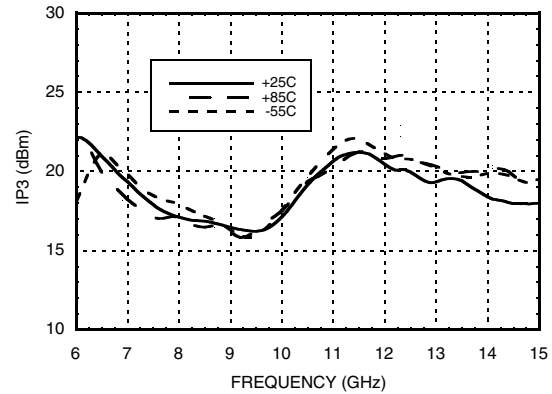


Input IP2 vs. LO Drive *

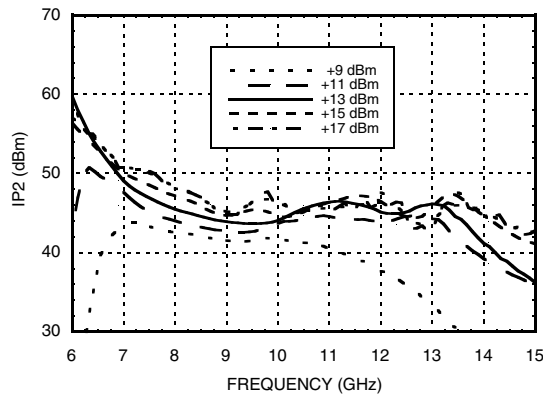

Input IP2 vs. Temperature @ LO = +13 dBm *

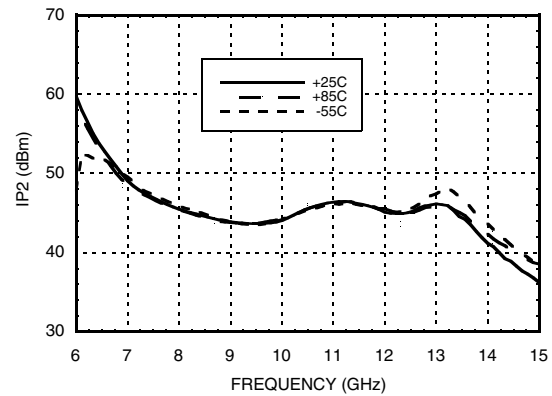

Input P1dB vs. Temperature @ LO = +13 dBm

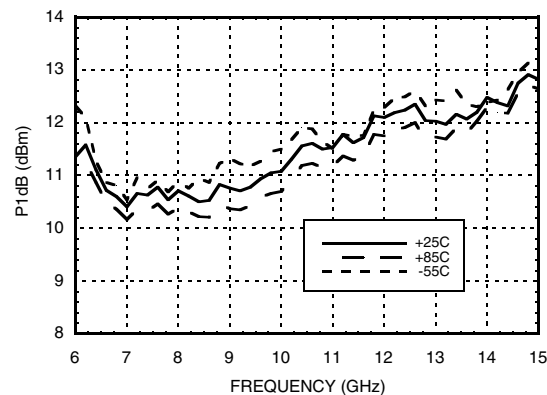

* Two-tone input power = -10 dBm each tone, 1 MHz spacing.

GaAs MMIC FUNDAMENTAL MIXER, 7 - 14 GHz



Absolute Maximum Ratings

RF / IF Input	+25 dBm
LO Drive	+25 dBm
Channel Temperature	150 °C
Continuous Pdiss (T = 85 °C) (derate 2.75 mW/°C above 85 °C)	178 mW
Thermal Resistance (channel to ground paddle)	364 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-55 to +85 °C
ESD Sensitivity (HBM)	Class 1C

MxN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	11	36	24	39
1	23	0	37	37	60
2	88	86	61	80	89
3	97	92	93	71	91
4	>120	>120	>120	>120	111

RF = 10.1 GHz @ -10 dBm
 LO = 10 GHz @ +13 dBm
 All values in dBc below the IF output power level.




**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

LO Freq. (MHz)	nLO			
	1	2	3	4
5.9	47	40	56	85
6.9	95	45	60	99
7.9	44	37	64	71
8.9	44	41	68	75
9.9	44	46	72	75
10.9	47	51	62	76
11.9	48	52	58	74
12.9	47	54	59	xx
13.9	42	57	60	xx
14.9	39	59	61	xx

**GaAs MMIC FUNDAMENTAL
MIXER, 7 - 14 GHz**



Outline Drawing

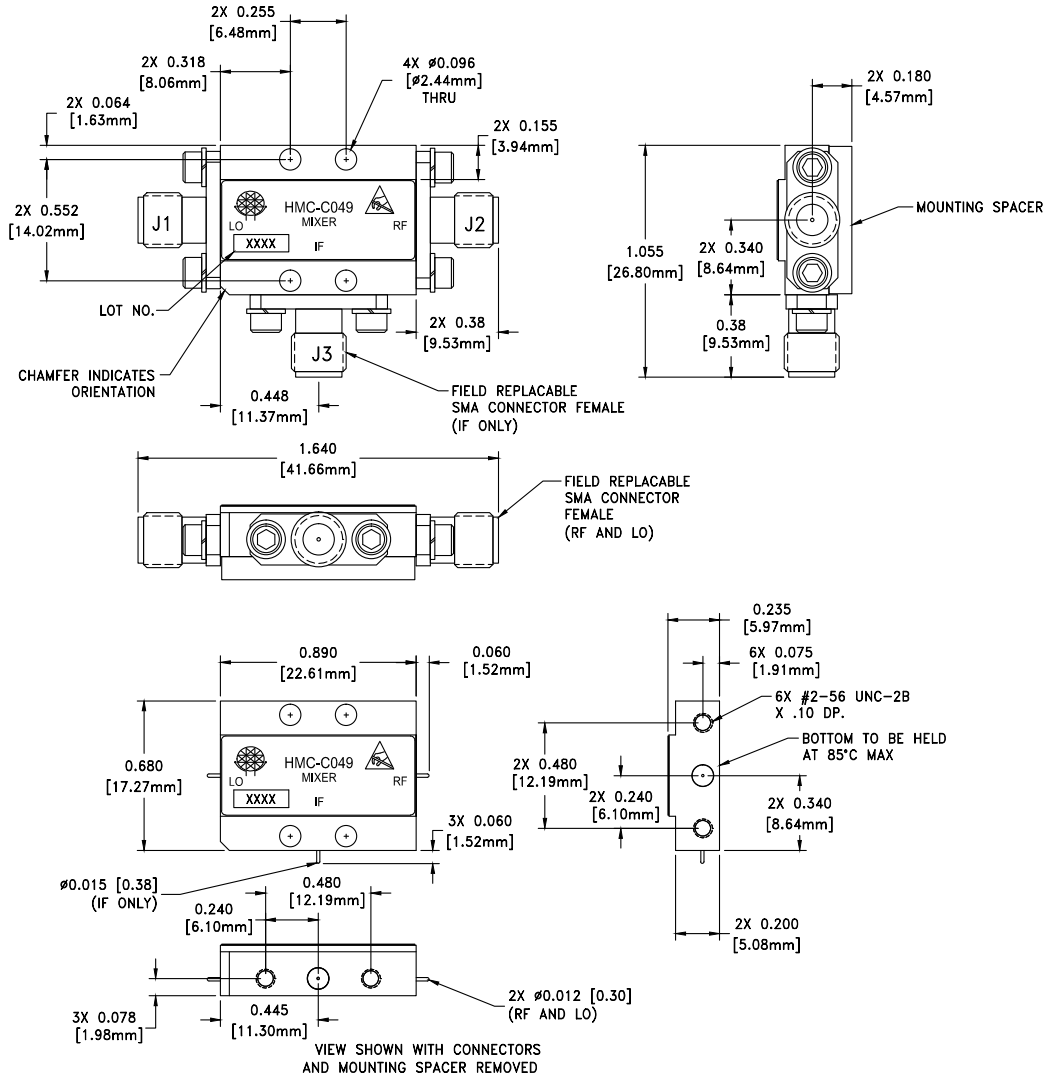

Package Information

Package Type	C-11
Package Weight [1]	20 gms [2]
Spacer Weight	2.6 gms [2]

[1] Includes the connectors



[2] \pm 1 gms Tolerance

NOTES:

1. PACKAGE, LEADS, COVER MATERIAL: KOVART™
2. PLATING: GOLD PLATE OVER NICKEL PLATE.
3. MOUNTING SPACER: NICKEL PLATED ALUMINUM.
4. ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).
5. TOLERANCES: \pm 0.010 [0.23] UNLESS OTHERWISE SPECIFIED
6. FIELD REPLACEABLE 2.92mm CONNECTORS. TENSOLITE 231CCSF OR EQUIVALENT.



Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	LO	This pin is DC coupled and matched to 50 Ohms.	
2	IF	This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source or sink more than 2 mA of current or part non-function and possible part failure will result.	
3	RF	This pin is DC coupled and matched to 50 Ohms.	