



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





**22.5° MMIC 4-BIT DIGITAL  
PHASE SHIFTER MODULE, 8 - 12 GHz**



**Features**

- Low RMS Phase Error: 6°
- Low Insertion Loss: 7 dB
- Excellent Flatness
- 360° Coverage, LSB = 22.5°
- Hermetically Sealed Module
- Field Replaceable SMA Female Connectors

**Typical Applications**


The HMC-C055 is ideal for:

- EW Receivers
- Weather & Military Radar
- Satellite Communications
- Beamforming Modules

**General Description**

The HMC-C055 is a 4-bit digital phase shifter which is rated from 8 to 12 GHz, providing 0 to 360 degrees of monotonic phase coverage, with a LSB of 22.5 degrees. The HMC-C055 features a very low RMS phase error of 6 degrees and a low insertion loss variation of ±1 dB across all phase states. This high accuracy phase shifter requires a single DC voltage of -5V and is internally matched to 50 Ohms. The package is a hermetically sealed module that can utilize field replaceable SMA connectors or be used as a drop-in module.

**Functional Diagram**

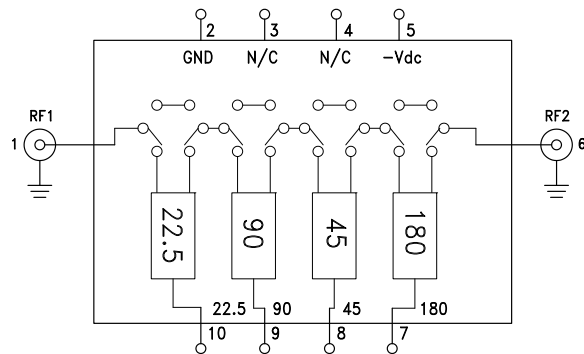

**Electrical Specifications,  $T_A = +25^\circ \text{C}$ , 50 Ohm System, Control Voltage = 0/+5V, -Vdc = -5V**

Parameter	Min.	Typ.	Max.	Units
Frequency Range	8		12	GHz
Insertion Loss*		7	8.5	dB
Input Return Loss*		10		dB
Output Return Loss*		8		dB
Phase Error*		±10	±17	deg
RMS Phase Error		6		deg
Gain Variation*		±1		dB
Input Power for 1 dB Compression		24		dBm
Input Third Order Intercept		38		dBm
Control Voltage Current		2.5		mA

\*Note: All States Shown

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D

# HMC-C055\* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

---

## [COMPARABLE PARTS](#)

View a parametric search of comparable parts.

## [DOCUMENTATION](#)

### Data Sheet

- [HMC-C055 Data Sheet](#)

## [DESIGN RESOURCES](#)

- [HMC-C055 Material Declaration](#)
- [PCN-PDN Information](#)
- [Quality And Reliability](#)
- [Symbols and Footprints](#)

## [DISCUSSIONS](#)

View all HMC-C055 EngineerZone Discussions.

## [SAMPLE AND BUY](#)

Visit the product page to see pricing options.

## [TECHNICAL SUPPORT](#)

Submit a technical question or find your regional support number.

## [DOCUMENT FEEDBACK](#)

Submit feedback for this data sheet.


---






**22.5° MMIC 4-BIT DIGITAL  
PHASE SHIFTER MODULE, 8 - 12 GHz**


**Insertion Loss, All States**

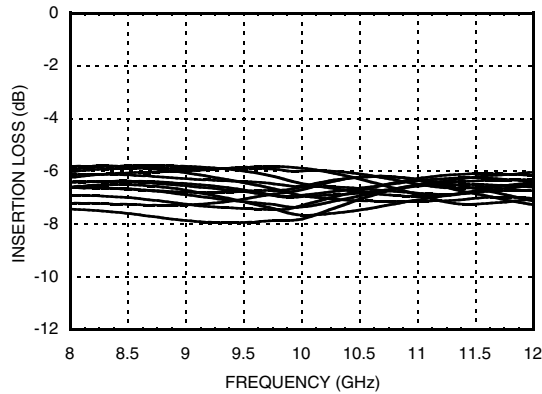


**Normalized Loss, All States**

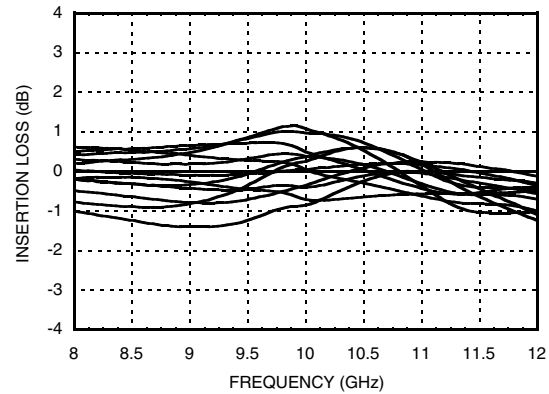


**Input Return Loss, All States**

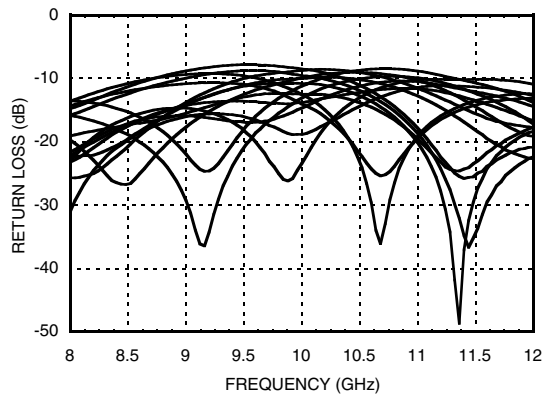


**Phase Error, All States**

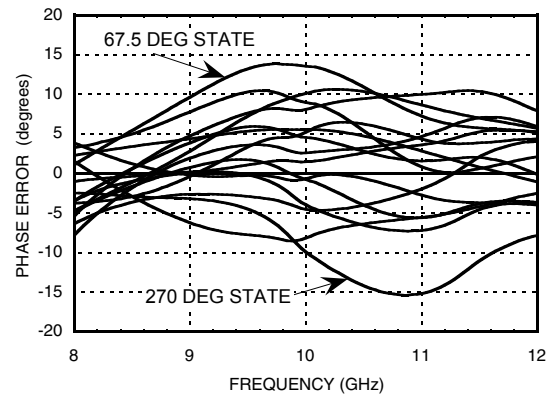

**Output Return Loss, All States**

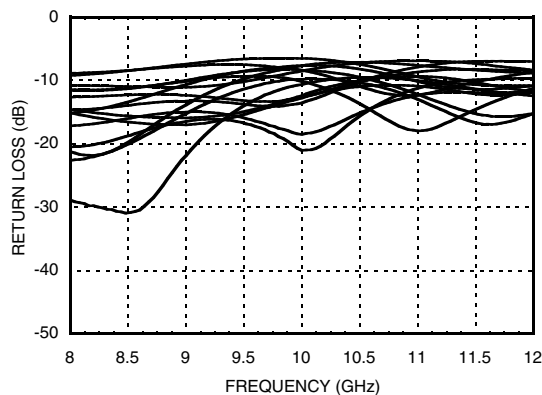

**Relative Phase Shift, All States**

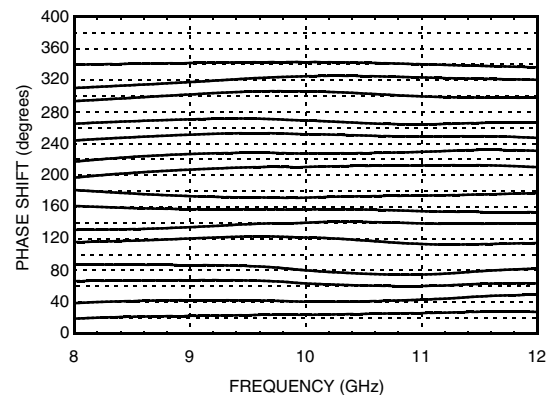


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**22.5° MMIC 4-BIT DIGITAL  
PHASE SHIFTER MODULE, 8 - 12 GHz**


**Relative Phase Shift,  
RMS, Average, Max, All States**

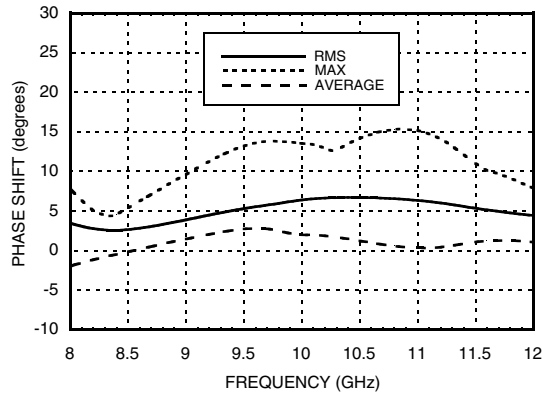


**Input IP3, All States**

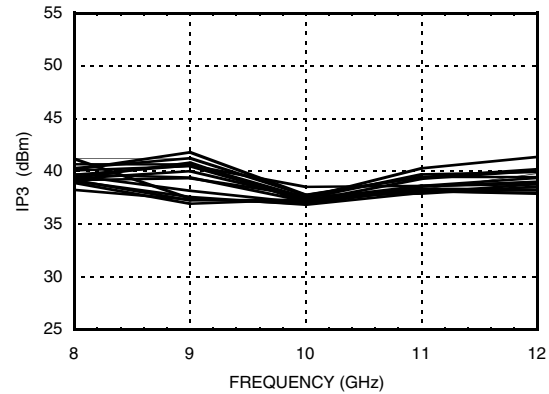


**Input IP2, All States**

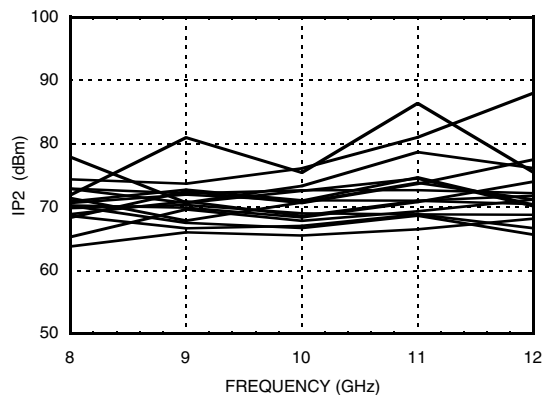


**Input P1dB, All States**

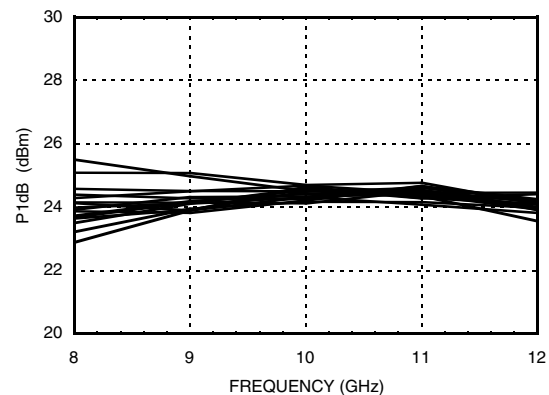

**RMS Phase Error vs. Temperature**

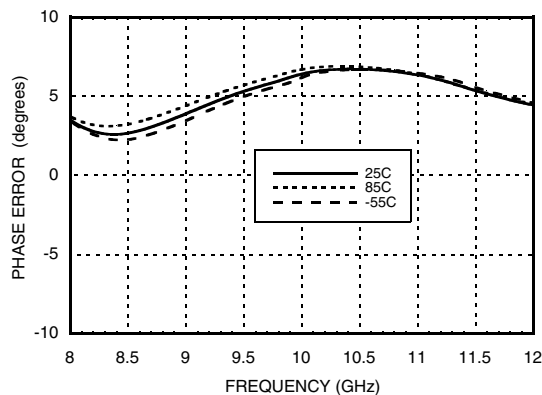

**Insertion Loss vs. Temperature All States**

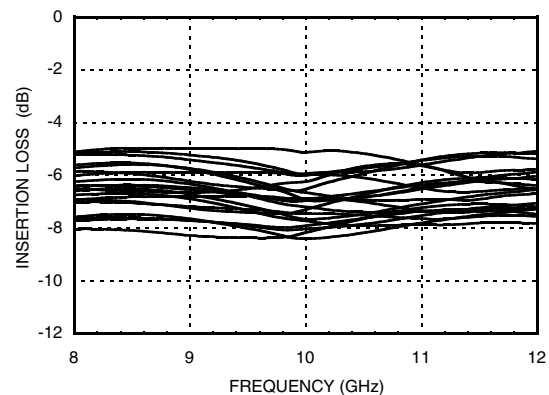


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D

## 22.5° MMIC 4-BIT DIGITAL PHASE SHIFTER MODULE, 8 - 12 GHz



### Phase Error vs. State

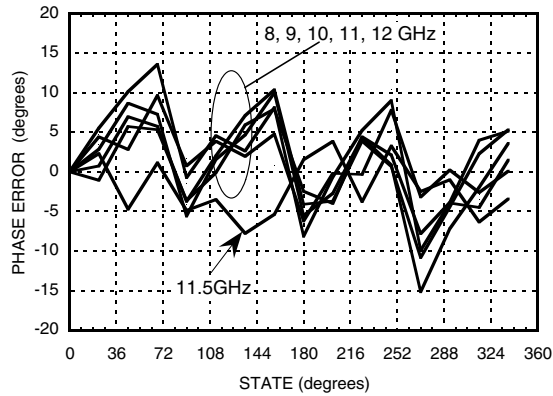

### Absolute Maximum Ratings

Input Power (RF1, RF2) (8-12 GHz)	+27 dBm (T= +85 °C)
Channel Temperature (Tc)	150 °C
Supply Voltage (-Vdc)	-5.5V
Control Voltage	5.5V
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C

### Truth Table

Control Voltage Input				Phase Shift (Degree) RFIN - RFOUT
22.5	45	90	180	
0	0	0	0	Reference
1	0	0	0	22.5
0	1	0	0	45
0	0	1	0	90
0	0	0	1	180
1	1	1	1	337.5

Any combination of the above states will provide a phase shift approximately equal to the sum of the bits selected.

### Control Voltage

State	Bias Condition
Low (0)	0V
High (1)	+5V




**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**



**22.5° MMIC 4-BIT DIGITAL PHASE SHIFTER MODULE, 8 - 12 GHz**

**Outline Drawing**

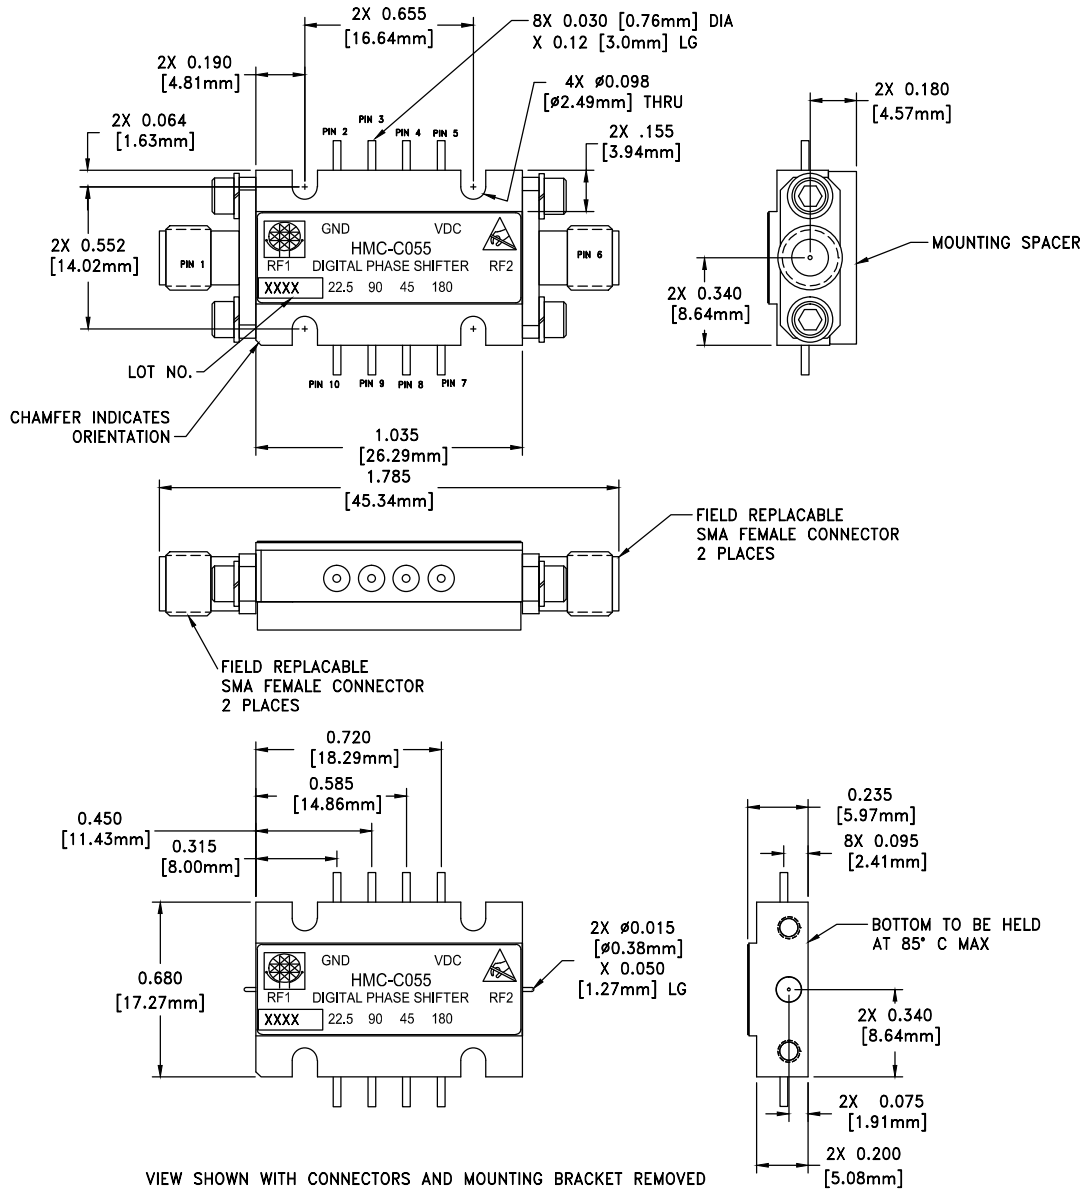

VIEW SHOWN WITH CONNECTORS AND MOUNTING BRACKET REMOVED

**Package Information**

Package Type	C-6
Package Weight [1]	17.4 gms [2]
Spacer Weight	3 gms [2]

[1] Includes the connectors  
 [2] ±1 gms Tolerance

- NOTES:**
1. PACKAGE, LEADS, COVER MATERIAL: KOVAR™
  2. PLATING: ELECTROLYTIC GOLD 50 MICROINCHES MIN., OVER ELECTROLYTIC NICKEL 75 MICROINCHES MIN
  3. MOUNTING SPACER: NICKEL PLATED ALUMINUM
  4. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
  5. TOLERANCES ±0.010 [0.25] UNLESS OTHERWISE SPECIFIED
  6. FIELD REPLACEABLE SMA CONNECTORS TENSOLITE 5602 - 5CCSF OR EQUIVALENT
  7. TO MOUNT MODULE TO SYSTEM PLATFORM REPLACE 0 -80 HARDWARE WITH DESIRED MOUNTING SCREWS

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D

## 22.5° MMIC 4-BIT DIGITAL PHASE SHIFTER MODULE, 8 - 12 GHz



### Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	RF1 & RF Ground	RF input connector, coaxial female, field replaceable. This pin is AC coupled and matched to 50 Ohms.	
2	GND	This pin must be connected to RF/DC ground.	
3, 4	N/C	The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.	
5	-Vdc	-5V DC Voltage	
6	RF2 & RF Ground	RF input connector, coaxial female, field replaceable. This pin is AC coupled and matched to 50 Ohms.	
7 - 10	180, 45, 90, 22.5	Control voltage input. See truth table and control voltage tables.	