



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

DESIGNED FOR USE WITH RD316 CABLES	
CABLE ENTRY DIAMETER MINIMUM	
FERRULE	.137
HOUSING	.062
CONTACT	.041

LOC	DIST	REVISIONS					
AJ	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B1		REVISED PER ECO-09-026299	25Nov2009	AM	BOB

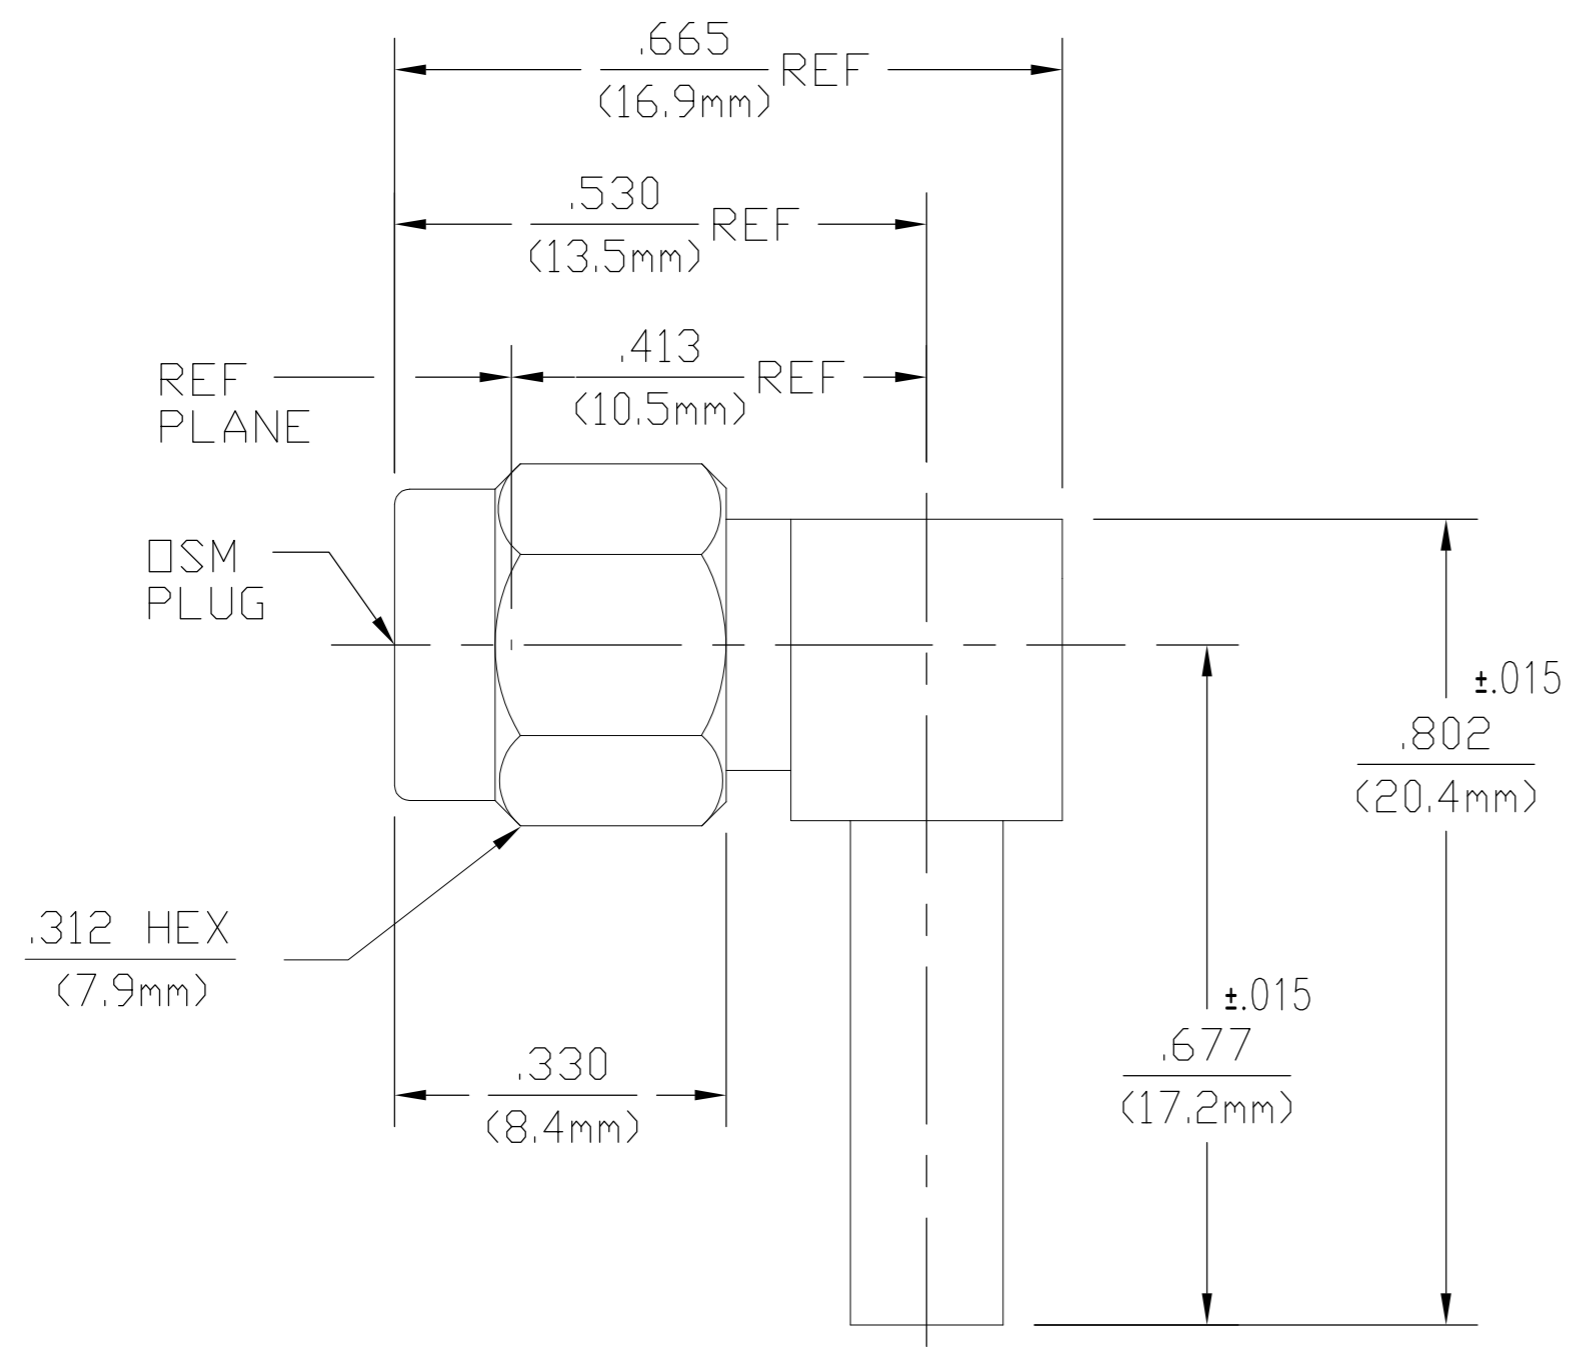

- 1 BRASS
- 2 STAINLESS STEEL
- 3 BERYLLIUM COPPER
- 4 PTFE
- 5 SILICONE RUBBER
- 6 GOLD PLATE
- 7 NICKEL PLATE
- 8 PASSIVATE

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310.1	TEMPERATURE RATING -65°C TO +165°C
Frequency Range (GHz) DC to 12.4	Recommended Mating Torque 7-10 In-Lbs	DURABILITY:500 CYCLES
Volt Rating (VRMS MAX) @ Sea Level 250	Mating Characteristics:	.XXX = in XX.X = mm
VSWR 1.18±.02f(GHz)	Insertion (MAX Lbs) N/A	
Insertion Loss (dB MAX) .07√f(GHz)	Withdrawal (MIN Oz) N/A	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750	Force to Engage and Disengage (In-Lbs MAX) 2.0	
Contact Resistance (Milliohms MAX)	Center Contact Captivation	
Center Contact 3.0	Axial (Lbs) 6.0	
Outer Contact 2.0	Radial (In-Oz) N/A	
Cable to Housing 0.5	Cable Retention	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500	Axial Force (Lbs) 20 Min	
I.R.(Megohms MIN) 5,000	Torque (In-Oz) N/A	
	Weight (Grams) TBD	

1 7	1 7	1 7	4	1 6	1 7	3	5	1056456-3
2 8	2 8	2 8	4	1 6	1 7	3	5	1056456-1
CAP	HOUSING	COUPLING NUT	DIELEC-TRIC	CENTER CONTACT	FERRULE	RETAINING RING	GASKET	TE PN.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN BB 2/1/93	Tyco Electronics Corporation Kunshan, Jiangsu, RPC 215312
CHK -	
APVD DC 2/3/93	NAME
PRODUCT SPEC	OSM RIGHT ANGLE CABLE PLUG CRIMP ATTACHMENT
APPLICATION SPEC	108-112002
WEIGHT -	408-4659
CUSTOMER DRAWING	SIZE A2 CAGE CODE 00779 DRAWING NO. 1056456 RESTRICTED TO -
	SCALE 4:1 SHEET 1 of 1 REV B1