



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





### Typical Applications

The HMC182S14 / HMC182S14E is ideal for:

- 800 - 1000 MHz Basestation


### Features

Low Insertion Loss: 0.8dB

Integrated 2:4 Decoder

14 Lead SOIC Package

### Functional Diagram

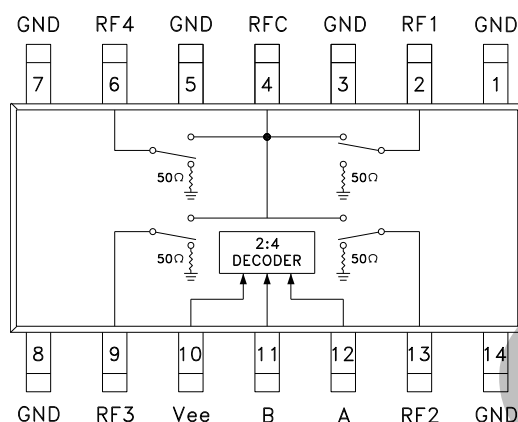

### General Description

The HMC182S14 & HMC182S14E are low-cost terminated SP4T switches in 14-lead SOIC packages for use in antenna diversity, switched filter banks, gain/attenuation selection, and general channel multiplexing applications. The switch can control signals up to 2 GHz. A 2:4 decoder is integrated on the switch, requiring only 2 control lines and a negative bias to select each RF path. The 2:4 decoder replaces 4 to 8 control lines normally required by GaAs SP4T switches. The HMC182S14(E) are drop-in replacements for the HMC165S14 in applications requiring low "off state" VSWR. See positive bias / TTL SP4T HMC241QS16.

10

SWITCHES - SMT

### Electrical Specifications,

$T_A = +25^\circ\text{C}$ , For 0/-5V Control and Vee = -5V in a 50 Ohm System


| Parameter  | Frequency                | Min.                             | Typ. | Max. | Units |
|--|--------------------------|----------------------------------|------|------|-------|
| Insertion Loss   | DC - 1.0 GHz             |                                  | 0.7  | 1.1  | dB    |
|  | DC - 2.0 GHz             |                                  | 0.8  | 1.2  | dB    |
| Isolation  | DC - 0.5 GHz             | 41                               | 45   |      | dB    |
|  | DC - 1.0 GHz             | 36                               | 40   |      | dB    |
|  | DC - 2.0 GHz             | 28                               | 32   |      | dB    |
| Return Loss  | "On State" DC - 1.0 GHz  | 21                               | 25   |      | dB    |
|  | "On State" DC - 2.0 GHz  | 16                               | 20   |      | dB    |
|  | "Off State" DC - 1.0 GHz | 17                               | 21   |      | dB    |
|  | "Off State" DC - 2.0 GHz | 13                               | 17   |      | dB    |
| Input Power for 1 dB Compression   | 50 MHz                   |                                  | 22   |      | dBm   |
|  | 0.5 - 2.0 GHz            |                                  | 24   |      | dBm   |
| Input Third Order Intercept<br>(Two-Tone Input Power = 7 dBm Each Tone). | 50 MHz                   | 25                               | 30   |      | dBm   |
|  | 0.5 - 1.0 GHz            | 41                               | 45   |      | dBm   |
|  | 0.5 - 2.0 GHz            | 37                               | 41   |      | dBm   |
| Switching Characteristics  | DC - 2.0 GHz             | tRISE, tFALL (10/90% RF)         | 25   |      | ns    |
|  |                          | tON, tOFF (50% CTL to 10/90% RF) | 50   |      | ns    |

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.


For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




### Insertion Loss

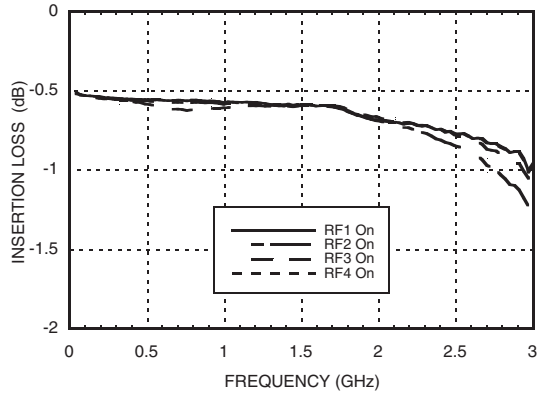


### Isolation

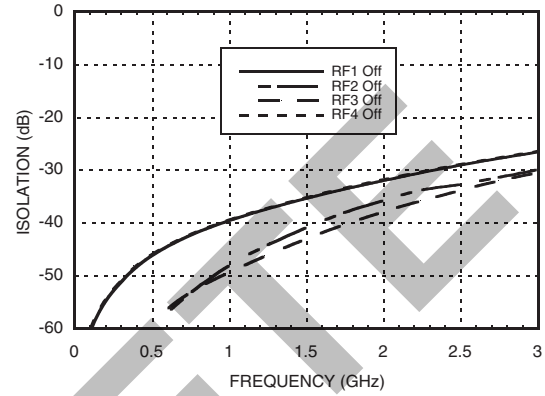

### Return Loss

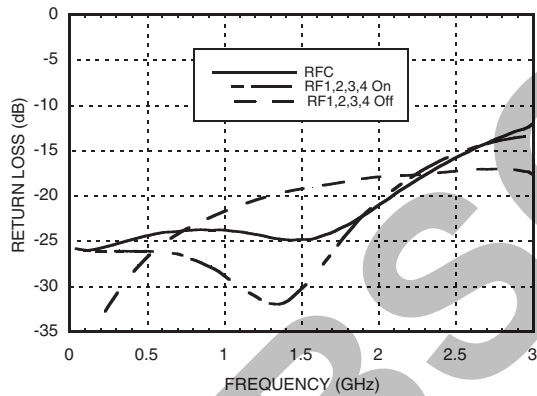

### Isolation Between Several RF I/Os

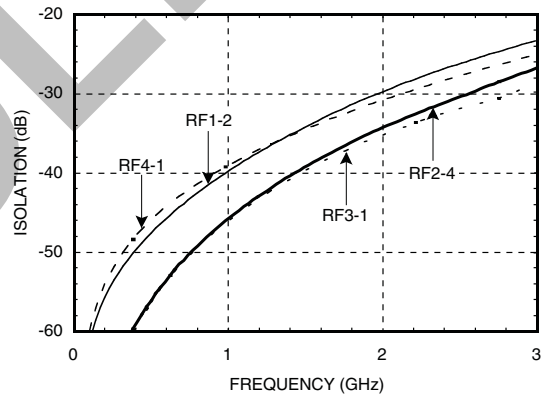

### Bias Voltage & Current

| Vee Range = -5.0 Vdc ± 10% |                 |                 |
|----------------------------|-----------------|-----------------|
| Vee (Vdc)                  | Iee (Typ.) (mA) | Iee (Max.) (mA) |
| -5.0                       | 4.0             | 7.0             |

### Truth Table

| Control Input |      | Signal Path State |
|---------------|------|-------------------|
| A             | B    | RFCOM to:         |
| High          | High | RF1               |
| Low           | High | RF2               |
| High          | Low  | RF3               |
| Low           | Low  | RF4               |

### Control Voltages

| State | Bias Condition             |
|-------|----------------------------|
| Low   | 0 to -3 VDC @ 70 uA Typ.   |
| High  | -5 to -4.2 VDC @ 5 uA Typ. |

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D





### Absolute Maximum Ratings

|  |  |
|--|--|
| Bias Voltage Range (Port Vee)            | -7 Vdc                                   |
| Control Voltage Range (A & B)            | Vee -0.5V to +1.0 Vdc                    |
| Channel Temperature                      | 150 °C                                   |
| Thermal Resistance (Insertion Loss Path) | 123 °C/W                                 |
| Thermal Resistance (Terminated Path)     | 260 °C/W                                 |
| Storage Temperature                      | -65 to +150 °C                           |
| Operating Temperature                    | -40 to +85 °C                            |
| Maximum Input Power                      | +27 dBm (<500 MHz)<br>+30 dBm (>500 MHz) |




ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

10

SWITCHES - SMT

### Outline Drawing

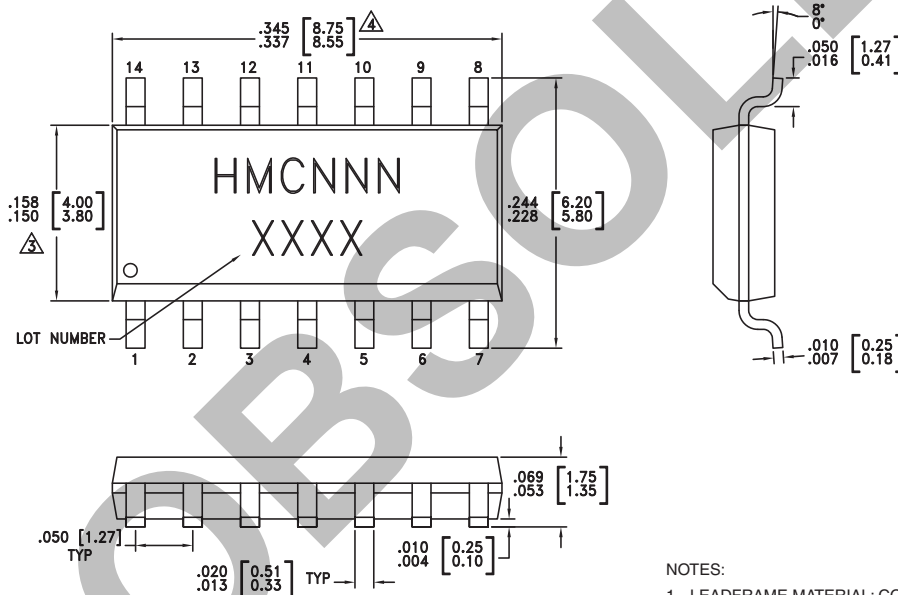

#### NOTES:

- LEADFRAME MATERIAL: COPPER ALLOY
- DIMENSIONS ARE IN INCHES [MILLIMETERS].
- DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
- DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
- ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.

### Package Information


| Part Number | Package Body Material   | Leadframe Plating | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|---|-------------------|---------------------|--------------------------------|
| HMC182S14   | Low Stress Injection Molded Plastic Silica and Silicon Impregnated                | Sn/Pb Solder      | MSL1 <sup>[1]</sup> | HMC182<br>XXXX                 |
| HMC182S14E  | RoHS-compliant Low Stress Injection Molded Plastic Silica and Silicon Impregnated | 100% Matte Tin    | MSL1 <sup>[2]</sup> | HMC182<br>XXXX                 |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX


**TTL Interface Circuit**

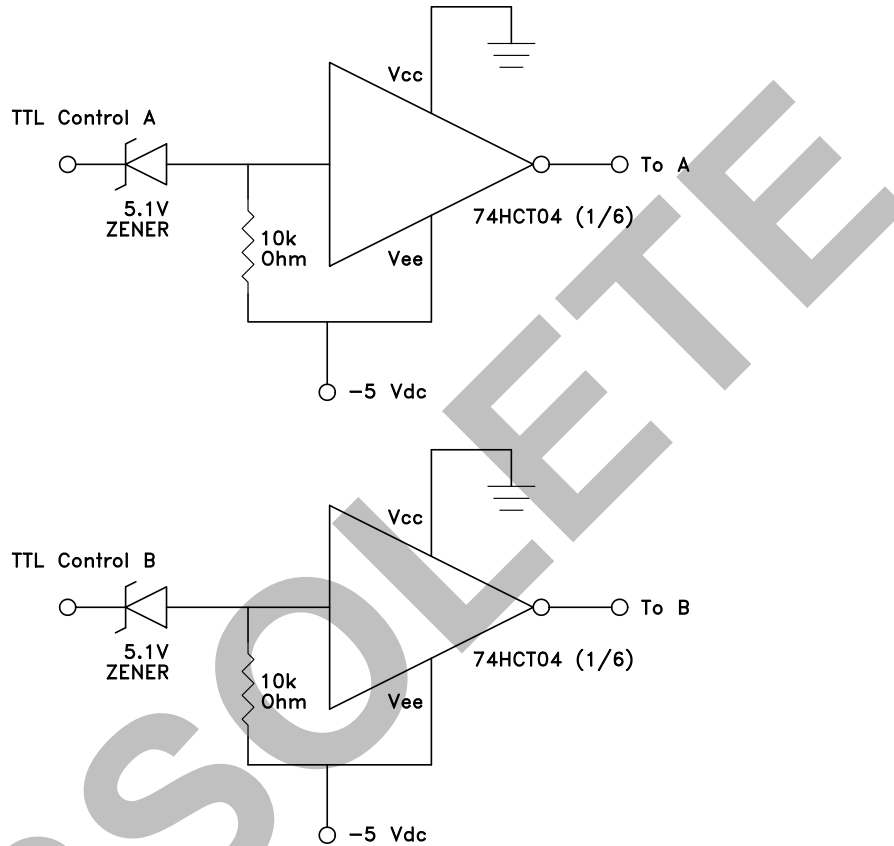

Note:  
Control inputs A and B can be driven directly with TTL logic with -5 Volts applied to the HCT logic gate Vee pin and to Vee (pin 10) of the RF switch.



**Evaluation PCB**

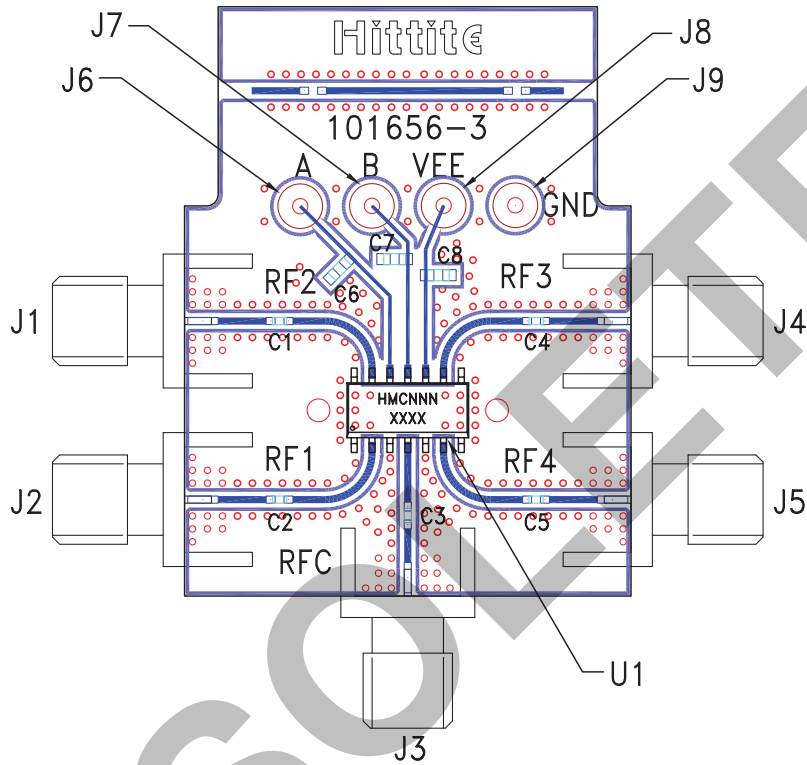

**List of Materials for Evaluation PCB 101672 [1]**

| Item    | Description                           |
|---------|---------------------------------------|
| J1 - J5 | PCB Mount SMA RF Connector            |
| J6 - J9 | DC Pin                                |
| C1 - C5 | 330 pF capacitor, 0402 Pkg.           |
| C6 - C8 | 10,000 pF capacitor, 0603 Pkg.        |
| U1      | HMC182S14 / HMC182S14E<br>SP4T Switch |
| PCB [2] | 101656 Evaluation PCB                 |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 ohm impedance and the package ground leads should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.



Notes:

v03.0805

## HMC182S14 / 182S14E

GaAs MMIC SP4T NON-REFLECTIVE  
SWITCH, DC - 2 GHz

OBSOLETE

10

SWITCHES - SMT

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D