



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



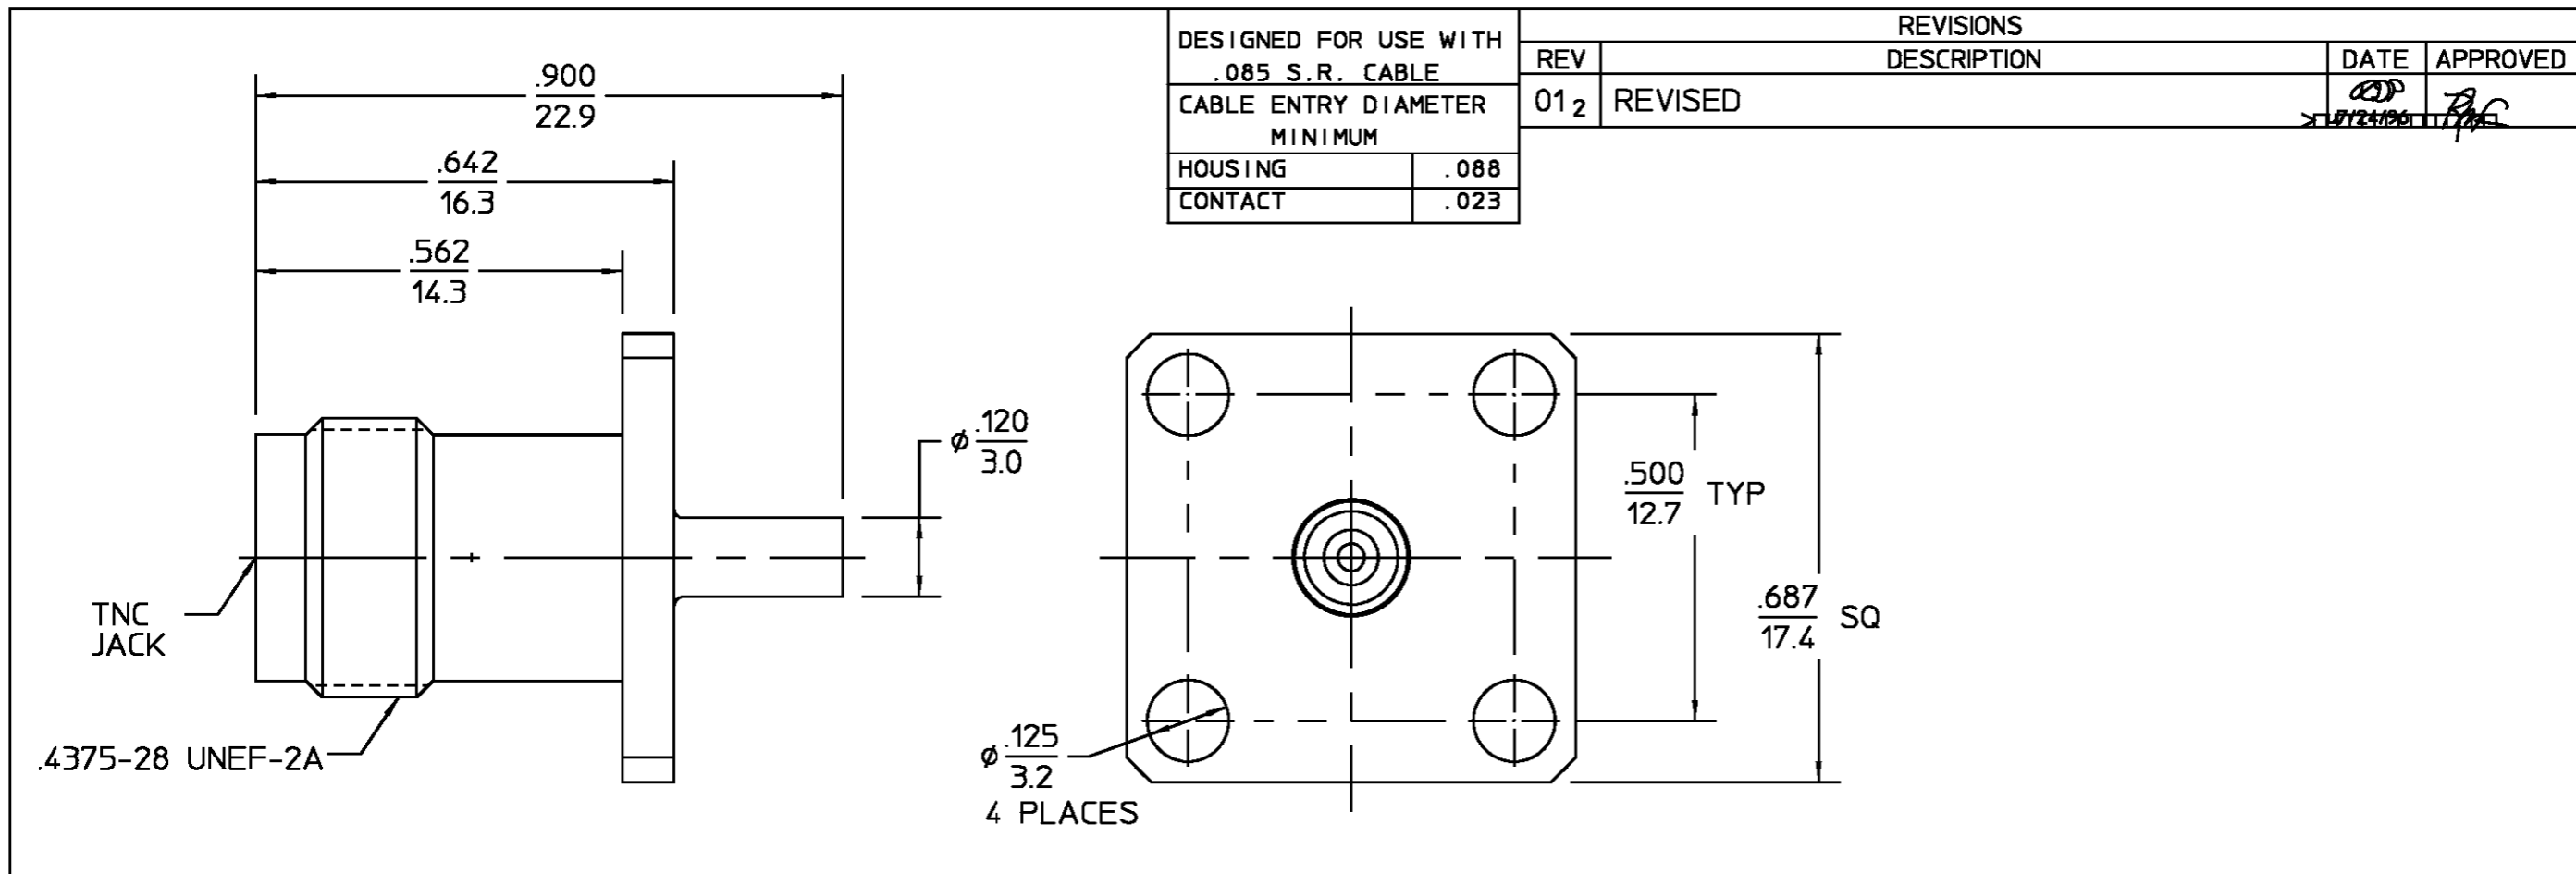

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	DIELECTRIC	CENTER CONTACT	COMPONENT	MATERIAL	FINISH
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. 406.1	Temperature Rating <u>-65°C to +105°C</u>	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	TFE FLUOROCARBON PER ASTM-D-1457	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H			GOLD PLATE PER MIL-G-45204
Frequency Range (GHz) DC to <u>15</u>	Recommended Mating Torque <u>12 - 15 in-lbs</u>	Vibration MIL-STD-202, Method 204, Condition B.						N/A
Volt Rating (VRMS MAX) @ Sea Level <u>335</u>	Mating Characteristics: Insertion (MAX Lbs) <u>2.0</u>	Shock MIL-STD-202, Method 213, Condition I.						GOLD PLATE PER MIL-G-45204
VSWR <u>1.35 MAX f(GHz)</u>	Withdrawal (MIN Oz) <u>2.0</u>	Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +115°C						
Insertion Loss (dB MAX) <u>.06 V(GHz)</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Moisture Resistance MIL-STD-202, Method 106						
RF Leakage (dB MIN) <u>-90 @ 2-3GHz</u>	Center Contact Captivation: Axial (Lbs) <u>N/A</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray						
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Radial (In-Oz) <u>N/A</u>							
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1,000</u>	Cable Retention: Axial Force (Lbs MIN) <u>30.0</u>							
Contact Resistance (Milliohms MAX): Center Contact <u>15</u>	Torque (In-Oz) <u>N/A</u>							
Outer Contact <u>2.0</u>	Weight (Grams) <u>TBD</u>							
Cable to Housing <u>0.5</u>								
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>670</u>								
I.R.(Megohms MIN) <u>5,000</u>								
.XXX = in XX.X = mm (REF)			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± °		DRAWN BY <u>RMK</u> DATE <u>4/30/70</u> CHECKED BY <u>PRB</u> <u>4/30/70</u> APP'D BY <u>EJC</u> <u>5/4/70</u>		AMP AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599	
			THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF M/A-COM INCORPORATED AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.		USE ASS'Y PROCEDURE 408-04722 NO. AP. (31-004)		TITLE "TNC" 4 HOLE FLANGE MOUNT CABLE JACK DIRECT SOLDER SIZE <u>B</u> CODE IDENT NO. <u>26805</u> 3106-7985-00 REV <u>01_2</u>	
					SCALE <u>4 : 1</u>		SHEET 1 OF 1	

CUSTOMER DRAWING

AMP PART # 1057699-1
SHEET 1 OF 1 REV A