



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## HIGH IP3 GaAs MMIC MIXER, 1.8 - 2.2 GHz

### Typical Applications


High Dynamic Range Infrastructure:

- GSM, GPRS & EDGE
- CDMA & W-CDMA
- Cable Modem Termination Systems

### Features

- Input IP3: +31 dBm
- High Side LO
- Ultra Small MSOP8 Package: 14.8mm<sup>2</sup>
- No External Components
- Included in the HMC-DK002 Designer's Kit

### Functional Diagram

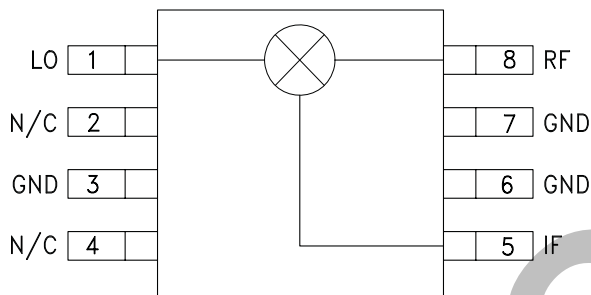

### General Description

The HMC402MS8 & HMC402MS8E are high dynamic range passive MMIC mixers in plastic surface mount 8 lead Mini Small Outline Packages (MSOP) covering 1.8 to 2.2 GHz. Excellent input IP3 performance of +31 dBm for down conversion and +27 dBm for up conversion is provided for 2.5G & 3G GSM/CDMA based UMTS or PCS applications at an LO drive of +17dBm. With a 1dB compression of +21 dBm, the RF port will accept a wide range of input signal levels. Conversion loss is 8.5dB typical and LO isolations are maintained at 24 to 30 dB. This miniature single-ended monolithic GaAs FET mixer does not require any external components or bias. The broad 50 to 500 MHz IF frequency response will satisfy many UMTS/PCS transmit or receive frequency plans configured for high side LO. The HMC402MS8(E) input IP3 performance coupled with its high P1dB rivals traditional active FET mixers while offering a much smaller 14.8mm<sup>2</sup> standard IC footprint, and no DC bias.

### Electrical Specifications, $T_A = 25^\circ\text{C}$ , LO = +17 dBm, IF = 300 MHz\*


Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range, RF		1.8 - 2.0		2.0 - 2.2			GHz
Frequency Range, LO		1.85 - 2.5		2.05 - 2.53			GHz
Frequency Range, IF		DC - 500		DC - 330			MHz
Conversion Loss		8.8	10.5		8.5	10.5	dB
Noise Figure (SSB)		8.8	10.5		8.5	10.5	dB
LO to RF Isolation	24	30		21	25		dB
LO to IF Isolation	19	24		24	28		dB
IP3 (Input)	27	30		27	31		dBm
1 dB Gain Compression (Input)	18	21		18	22		dBm
LO Input Drive Level (Typical)		+16 to +18		+16 to +18			dBm

\*Unless otherwise noted, all measurements performed as a downconverter with high side LO & IF = 300 MHz.


**HIGH IP3 GaAs MMIC MIXER, 1.8 - 2.2 GHz**




**Conversion Gain vs. Temperature @ LO = +17 dBm**

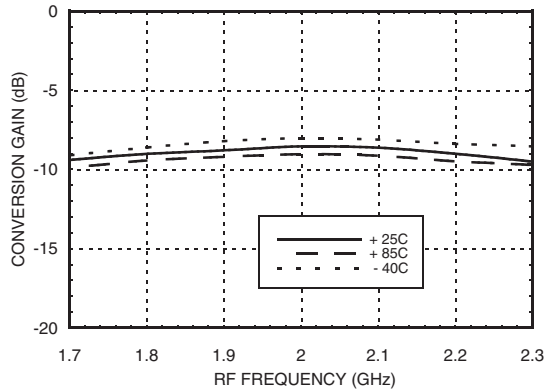


**Isolation @ LO = +17 dBm**

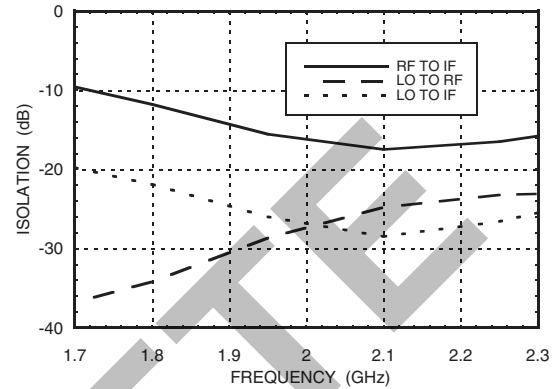


**Conversion Gain vs. LO Drive**

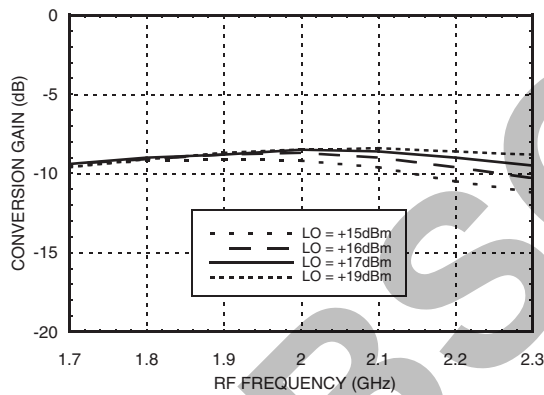


**Return Loss @ LO = +17 dBm**

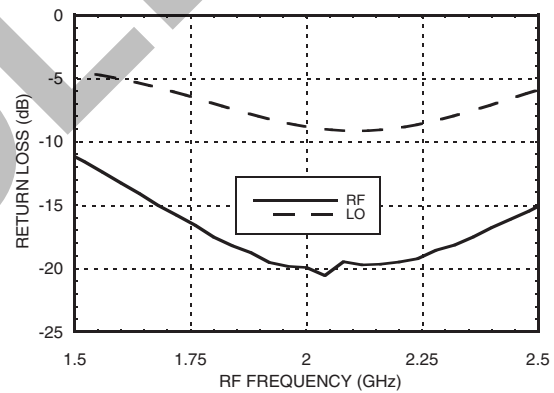

**IF Bandwidth @ LO = +17 dBm**

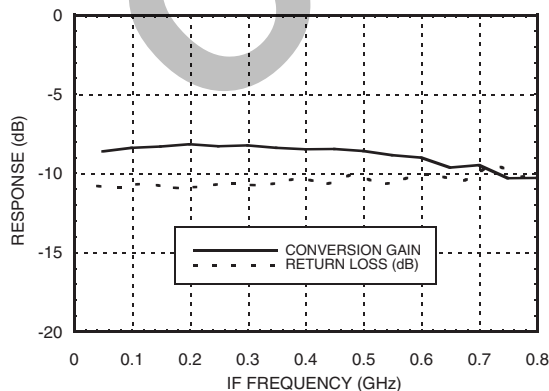

**Unconverter Performance Conversion Gain @ LO = +17 dBm**

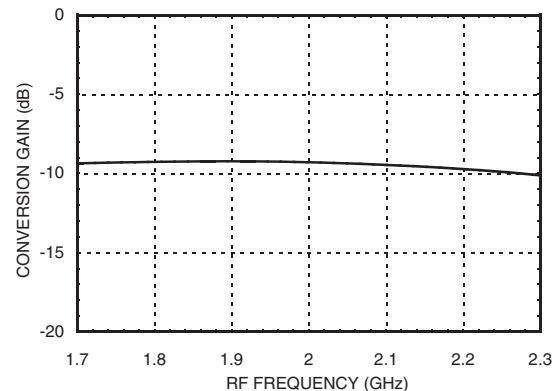

\*Unless otherwise noted, all measurements performed as a downconverter with high side LO & IF = 300 MHz.


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D


**HIGH IP3 GaAs MMIC MIXER, 1.8 - 2.2 GHz**




**Input IP3 vs. IF Frequency, RF = 1.95 GHz**

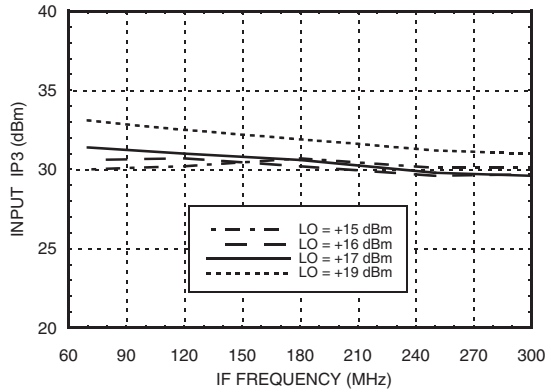


**Input IP3 vs. Temperature @ LO = +17 dBm**

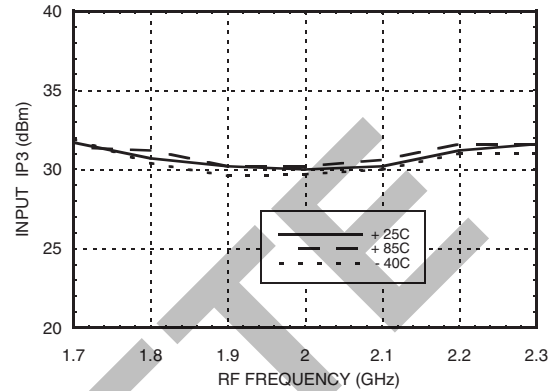


**Input IP3 vs. IF Frequency, RF = 2.15 GHz**

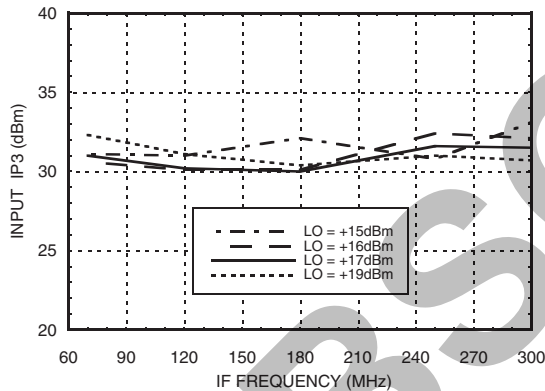


**Input IP3 vs. LO Drive**

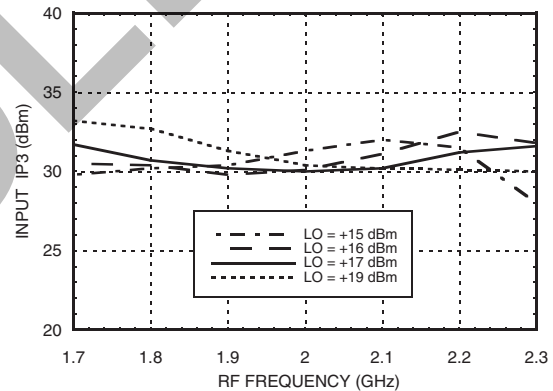

**Input P1dB vs. Temperature @ LO = +17 dBm**

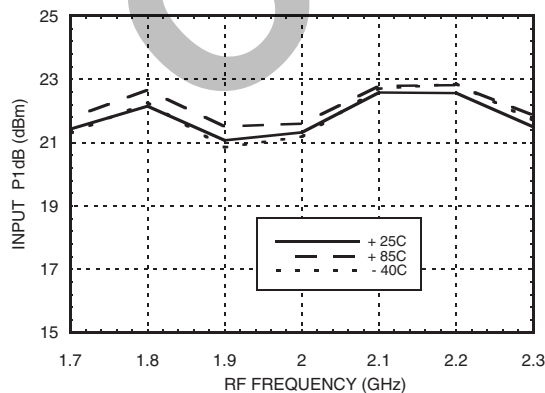

**Upconverter IP3 vs. LO Drive, IF = 200 MHz**

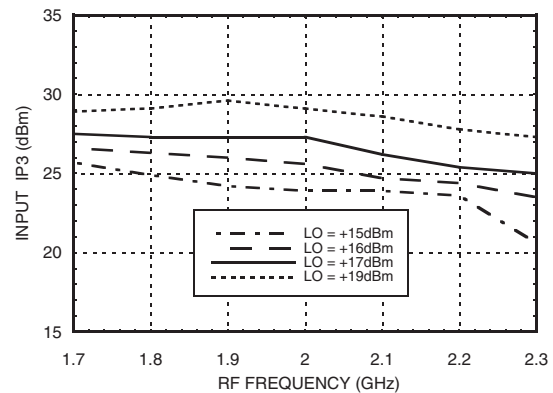

\*Unless otherwise noted, all measurements performed as a downconverter with high side LO & IF = 300 MHz.


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D


## HIGH IP3 GaAs MMIC MIXER, 1.8 - 2.2 GHz



### Input IP2 vs. Temperature @ LO = +17 dBm

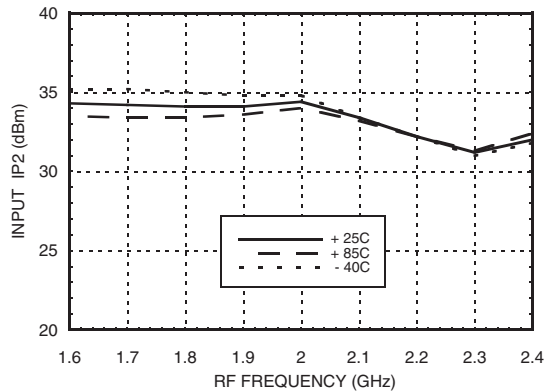

### Input IP2 vs. LO Drive

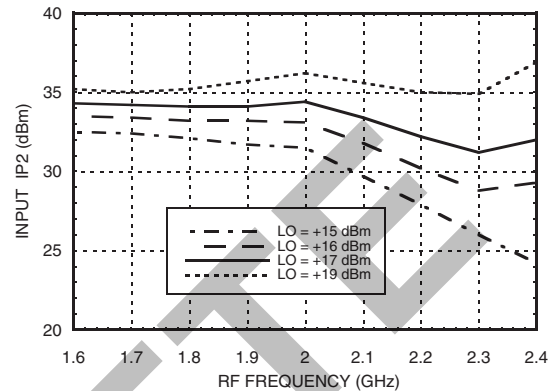

### MxN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	-7	-3	-1	11
1	5	0	27	54	30
2	62	64	48	65	70
3	81	81	82	81	80
4	77	81	80	83	82

RF Freq = 1.9 GHz @ -10 dBm  
LO Freq = 2.2 GHz @ +17 dBm  
All values in dBc relative to the IF power level.  
Measured as a downconverter.

### Harmonics of LO

LO Freq (GHz)	nLO Spur @ RF Port			
	1	2	3	4
1.8	40	30	51	57
2	30	29	51	53
2.2	26	32	51	50
2.4	24	36	53	49
2.6	23	43	59	53
2.8	22	41	51	71

LO = +17 dBm  
All values are in dBc below input LO level @ RF port.

### Absolute Maximum Ratings

RF/IF Input	+27 dBm
LO Drive	+27 dBm
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
IF DC Current	±40 mA



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS


\*Unless otherwise noted, all measurements performed as a downconverter with high side LO & IF = 300 MHz.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc.,  
One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D



**Outline Drawing**

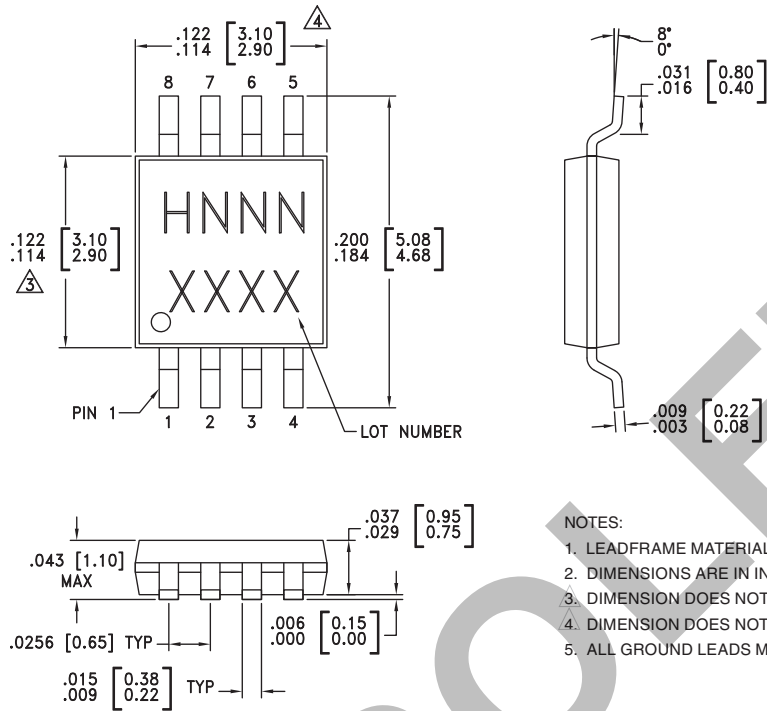

- NOTES:
1. LEADFRAME MATERIAL: COPPER ALLOY
  2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
  3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
  4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
  5. ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.





**Package Information**

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking <sup>[3]</sup>
HMC402MS8	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 <sup>[1]</sup>	H402 XXXX
HMC402MS8E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 <sup>[2]</sup>	H402 XXXX

[1] Max peak reflow temperature of 235 °C  
 [2] Max peak reflow temperature of 260 °C  
 [3] 4-Digit lot number XXXX




### Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	LO	This pin is AC coupled & matched to 50 Ohms from 1.8 to 2.2 GHz. Blocking capacitors are required if line potential is not equal to 0V.	
2, 4	N/C	Not connected.	
3, 6, 7	GND	This pin must be connected to RF ground.	
5	IF Port	This pin is DC coupled. For applications not requiring operation to DC this port should be DC blocked externally using a series capacitor. Choose value of capacitor to pass IF frequency desired. For operation to DC, this pin must not sink/source more than 40 mA of current or failure may result.	
8	RF Port	This pin is DC coupled & matched to 50 Ohms from 1.8 to 2.2 GHz	



**Evaluation PCB**

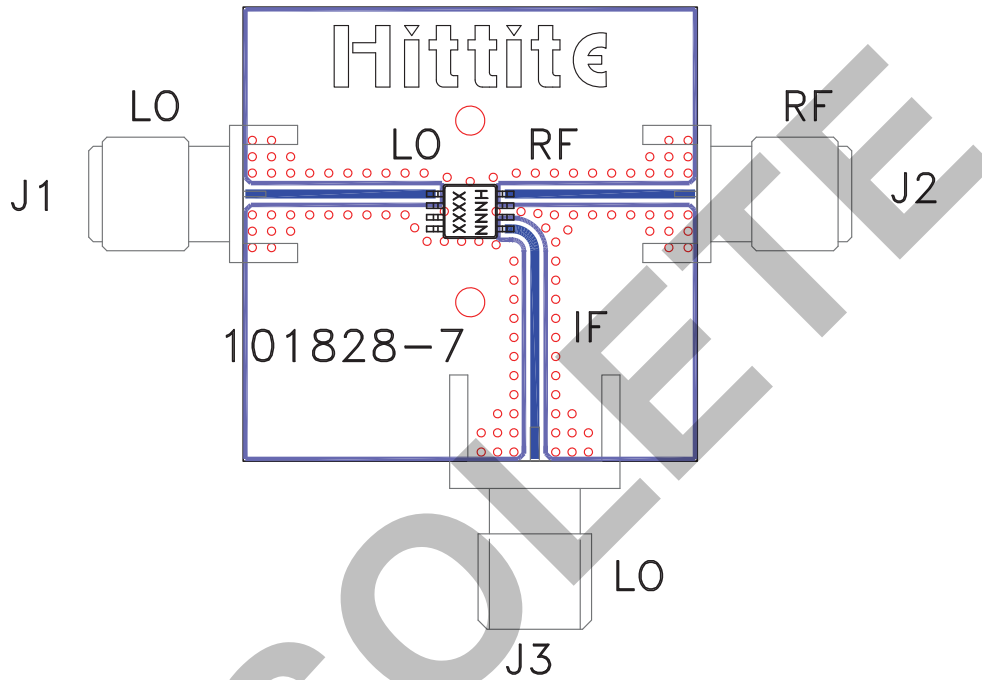

**List of Materials for Evaluation PCB 101830 [1]**

Item	Description
J1 - J3	PCB Mount SMA RF Connector
U1	HMC402MS8 / HMC402MS8E Mixer
PCB [2]	101828 Eval Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D



**Notes:**

**OBSOLETE**