



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AJ	17	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REV PER EC 0514-0092-05	10DEC2005	REH	KW

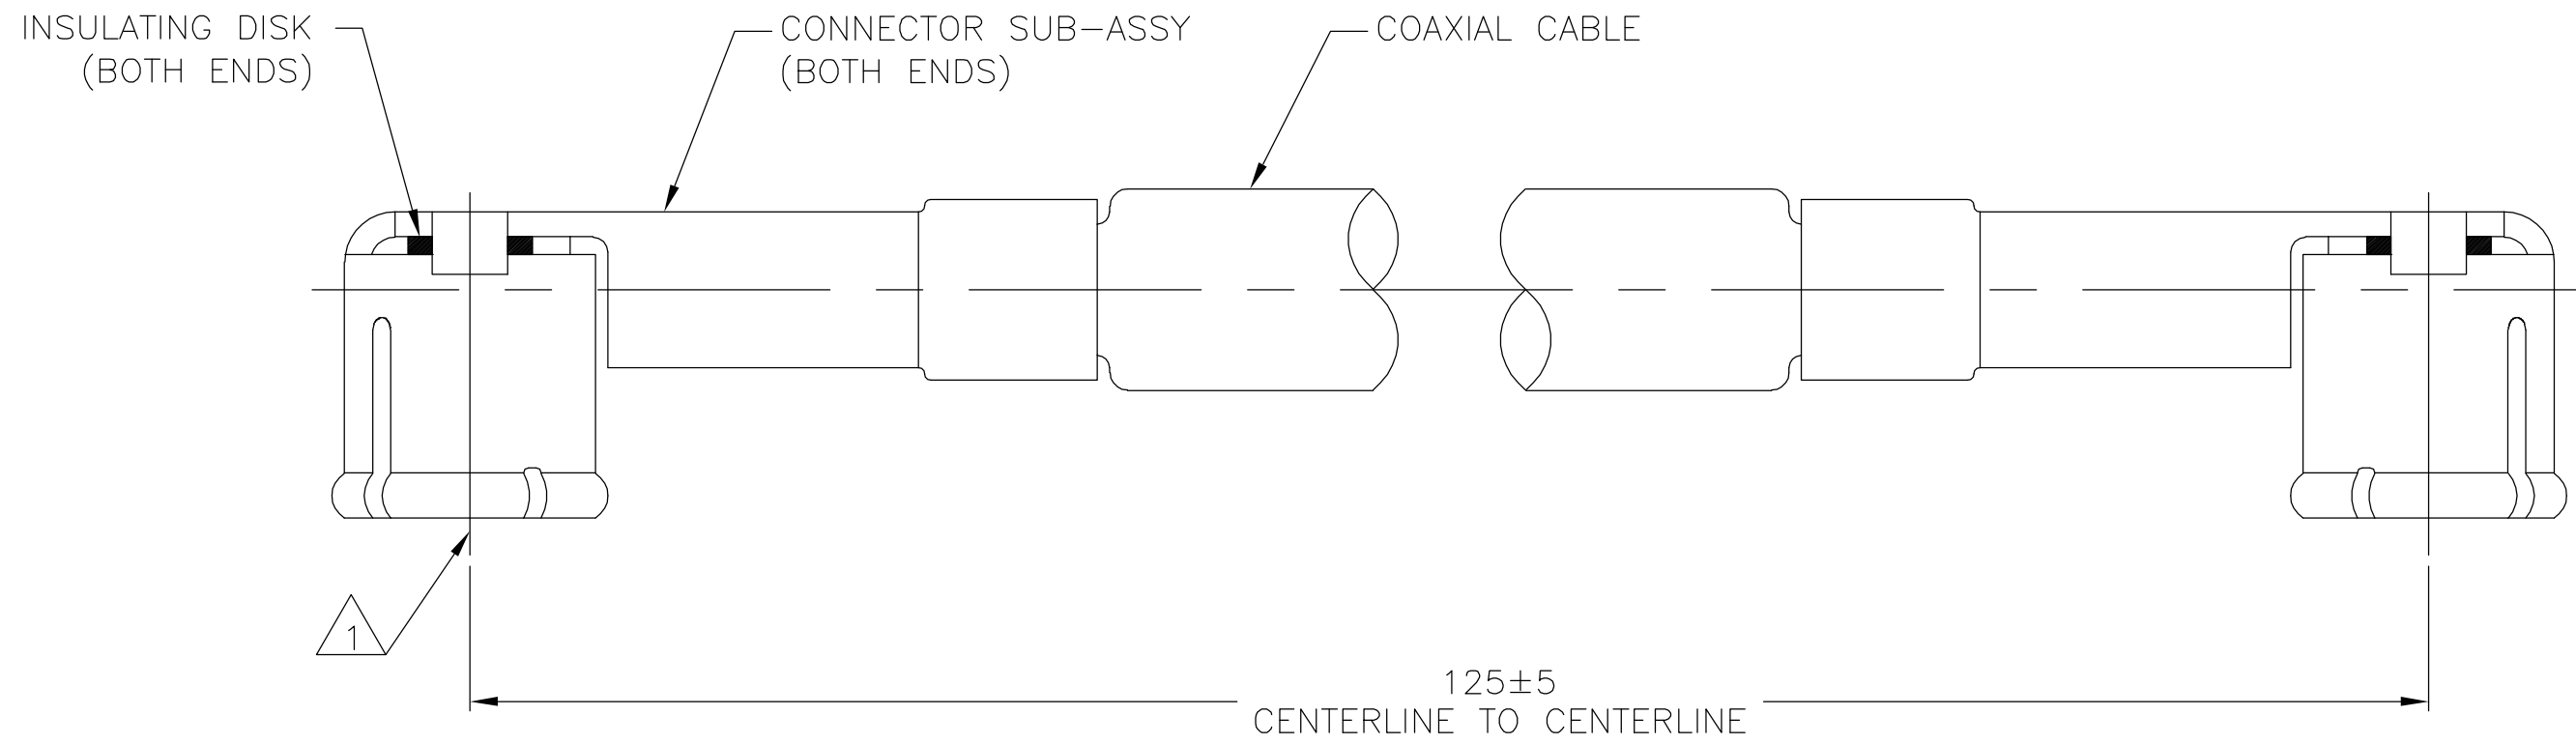

1064305-1
PART NUMBER

1 CONNECTOR CENTERLINES SHALL BE ALIGNED WITHIN ±30°.

CONNECTOR	MATERIAL	FINISH
OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
CABLE		
JACKET	POLYVINYL CHLORIDE (PVC)	N/A
SHIELD	SILVER PLATED COPPER WIRE, 38 AWG	N/A
DIELECTRIC	PERFLUOROALKOXY (PFA)	N/A
CENTER CONDUCTOR	SILVER PLATED COPPER CLAD STEEL, 30 AWG	N/A
INSULATING DISK	POLYESTER	N/A
COMPONENT	MATERIAL	FINISH

ELECTRICAL	
FREQUENCY	DC - 6 GHz
NOMINAL IMPEDENCE	50 OHMS
VOLTAGE RATING	250 VOLTS (VRMS MAX) @ SEA LEVEL
VSWR (MATED CONNECTORS ONLY)	1.20:1 MAX @ 2 GHz 1.40:1 MAX @ 6 GHz
INSULATION RESISTANCE	1,000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE	500 VOLTS (VRMS MIN) @ SEA LEVEL
MECHANICAL	
CONNECTOR DURABILITY	100 MATING CYCLES
ENVIRONMENTAL	
TEMPERATURE RATING	-40°C(-40°F) TO +105°C(221°F)

PRODUCT SPEC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. RESNIC 24MAY91	tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK	NAME OSMT RIGHT ANGLE JACK TO JACK CABLE ASSY	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD [Signature] 05/13/92	SIZE A2 CAGE CODE 00779 DRAWING NO C=1064305 RESTRICTED TO	
0 PLC ± -		PRODUCT SPEC	SCALE 12:1 SHEET 1 of 1 REV B	
1 PLC ± -		APPLICATION SPEC		
2 PLC ± -		WEIGHT -		
3 PLC ± -		CUSTOMER DRAWING		
4 PLC ± -				
ANGLES ± -				
FINISH -				