



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



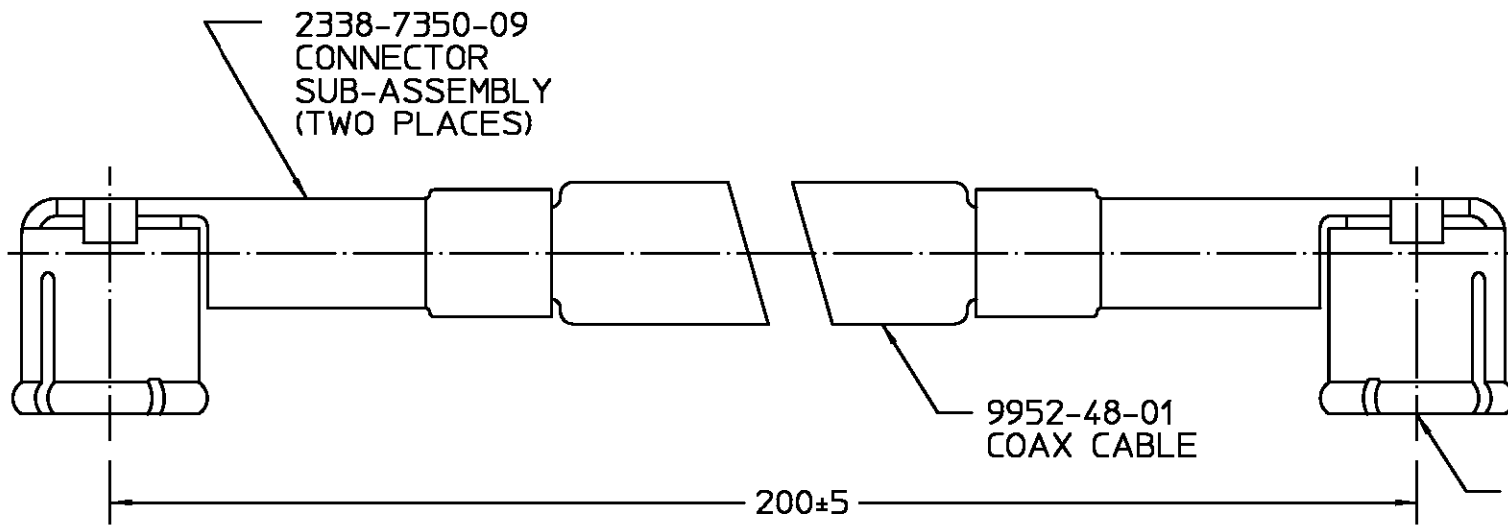

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₂	REVISED	7/26/93	<i>AD</i>
01 ₃	REVISED PER ECN 99-0001	7/9/99	<i>S. Morby</i>

OUTLINE, -50 AND B/M MUST CARRY THE SAME MAJOR REVISION LEVEL

NOTES
 1. CONNECTOR CENTERLINES SHALL BE ALIGNED AS SHOWN ±30° FOR LENGTHS 165 MILLIMETER OR LESS. LENGTHS ABOVE 165 MILLIMETER SHALL HAVE CONNECTOR CENTERLINES ALIGNED AT RANDOM.

OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
CABLE: JACKET	FLUORINATED ETHYLENE-PROPYLENE	N/A
SHIELD	SILVER COATED COPPER WIRE, 38 AWG	N/A
DIELECTRIC	PERFLUOROALKOXY OR POLYTETRAFLUOROETHYLENE	N/A
CENTER CONDUCTOR	SILVER COATED COPPER CLAD STEEL	N/A

ELECTRICAL	
Frequency	DC - 6 GHz
Nominal Impedance	50 ohms
Voltage Rating	250 Volts (VRMS Max.) @ Sea Level
VSWR	1.20:1 Max. @ 2GHz 1.40:1 Max. @ 6GHz
Insulation Resistance	1000 Megohms Minimum
Dielectric Withstanding Voltage	500 Volts (VRMS Minimum) @ Sea Level
MECHANICAL	
Connector Durability	100 mating cycles
ENVIRONMENTAL	
Temperature Rating	-40°C (-67°F) To +125°C (257°F)

COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON		
FRAC	DEC	ANGLES
± 1/64	± .005	± 1°
DRAWN BY <i>BB</i> DATE 3/3/93		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
CHECKED BY		
APPD BY <i>P. Rank</i> 03/04/93		AMP TITLE OSMT RIGHT ANGLE JACK TO JACK CABLE ASSEMBLY, HIGH TEMPERATURE
USE ASSY PROCEDURE		
NO. A.P. <u>N/A</u>		SIZE B CODE IDENT NO. 26805 SCALE 10:1
		9952-1200-23 SHEET 1 OF 1