



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# HMC649LP6 / 649LP6E

## GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER, 3 - 6 GHz

### Typical Applications


The HMC649LP6(E) is ideal for:

- EW Receivers
- Weather & Military Radar
- Satellite Communications
- Beamforming Modules
- Phase Cancellation

### Features

- Low RMS Phase Error: 3°
- Low Insertion Loss: 8 dB
- High Linearity: +44 dBm
- Positive Control Logic
- 360° Coverage, LSB = 5.625°
- 28 Lead QFN Leadless SMT Package: 36mm<sup>2</sup>

### Functional Diagram

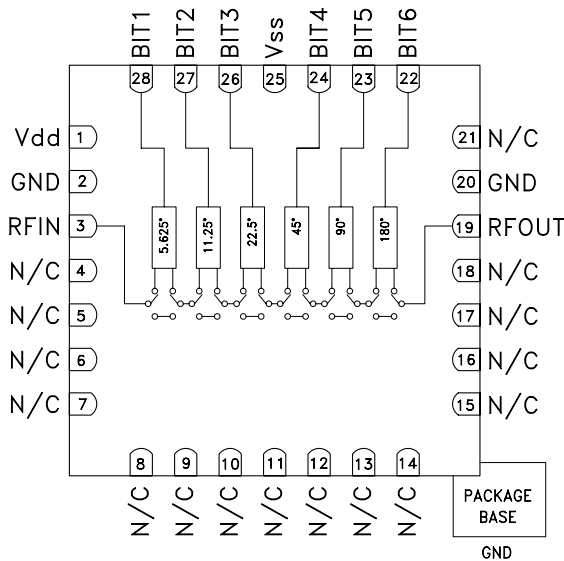

### General Description

The HMC649LP6(E) is a 6-bit digital phase shifter which is rated from 3 - 6 GHz, providing 360 degrees of phase coverage, with a LSB of 5.625 degrees. The HMC649LP6(E) features very low RMS phase error of 3 degrees and extremely low insertion loss variation of ±0.5 dB across all phase states. This high accuracy phase shifter is controlled with positive control logic of 0/+5V. The HMC649LP6(E) is housed in a compact 6x6 mm plastic leadless SMT package and is internally matched to 50 Ohms with no external components.

### Electrical Specifications

$T_A = +25^\circ\text{C}$ ,  $V_{SS} = -5\text{V}$ ,  $V_{DD} = +5\text{V}$ , Control Voltage = 0/ +5V, 50 Ohm System

| Parameter                        | Min.          | Typ. | Max.      | Units |
|----------------------------------|---------------|------|-----------|-------|
| Frequency Range                  | 3             |      | 6         | GHz   |
| Insertion Loss*                  |               | 8    | 10.5      | dB    |
| Input Return Loss*               |               | 13   |           | dB    |
| Output Return Loss*              |               | 10   |           | dB    |
| Phase Error*                     | 3.0 - 5.5 GHz | ±5   | +15 / -25 | deg   |
|                                  | 5.5 - 6.0 GHz | -10  | +15 / -32 | deg   |
| RMS Phase Error                  |               | 3    |           | deg   |
| Insertion Loss Variation*        |               | ±0.5 |           | dB    |
| Input Power for 1 dB Compression |               | 29   |           | dBm   |
| Input Third Order Intercept      |               | 44   |           | dBm   |
| Control Voltage Current          |               | 35   | 250       | µA    |
| Bias Voltage Current             |               | 5    | 15        | mA    |

\*Note: Major States Shown


For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)


Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)




**Insertion Loss, Major States Only**

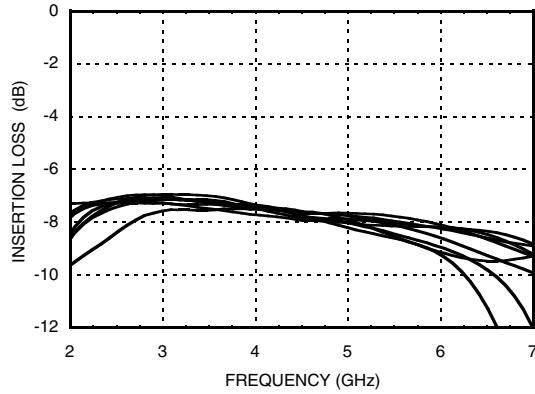


**Normalized Loss, Major States Only**

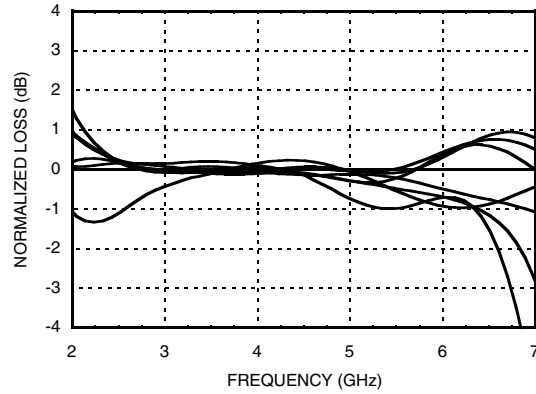


**Input Return Loss, Major States Only**

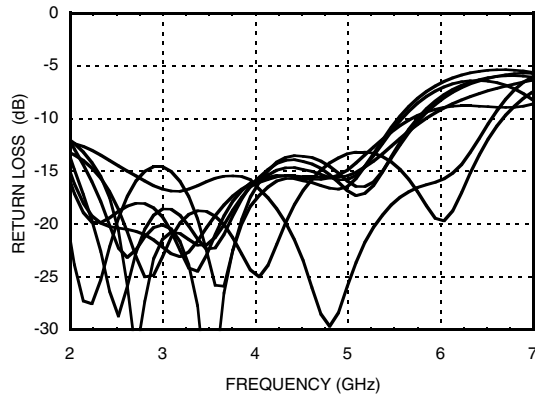


**Phase Error, Major States Only**

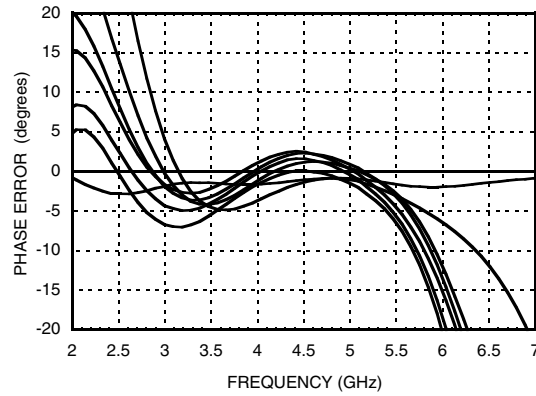

**Output Return Loss, Major States Only**

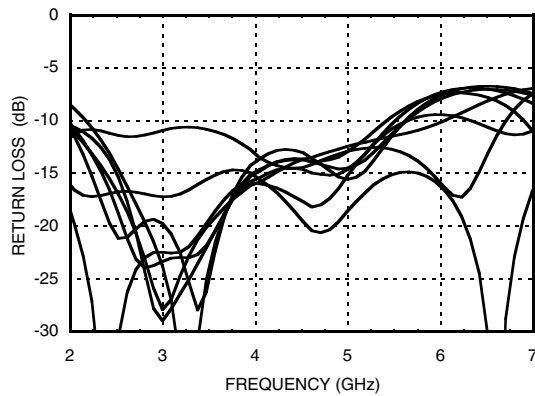


**Relative Phase Shift  
Major States Including All Bits**

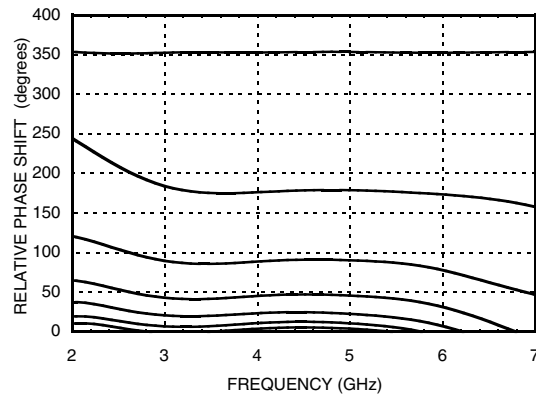




## GaAs MMIC 6-BIT DIGITAL PHASE SHIFTER, 3 - 6 GHz


**Relative Phase Shift, RMS, Average, Max, All States**

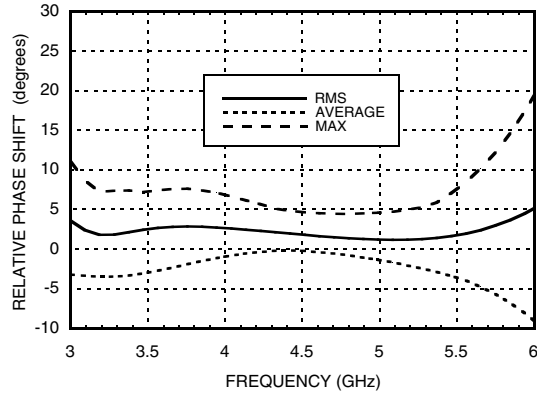


**Input IP3, Major States Only**

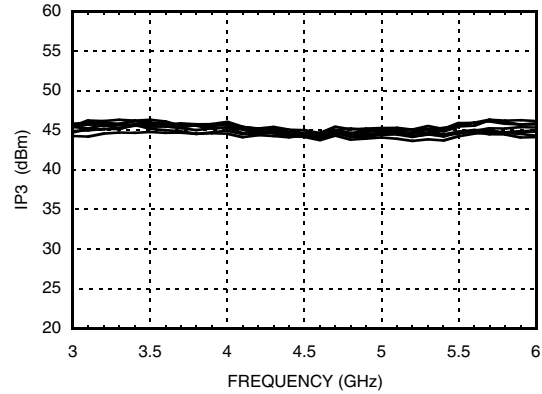


**Input IP2, Major States Only**

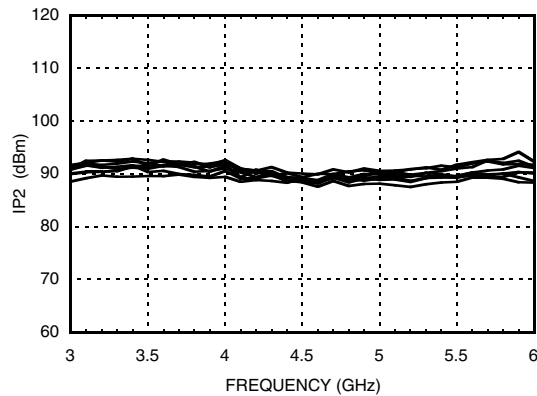


**Input P1dB, Major States Only**

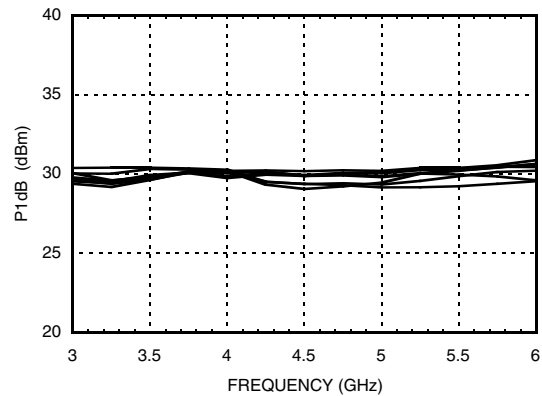

**RMS Phase Error vs. Temperature**

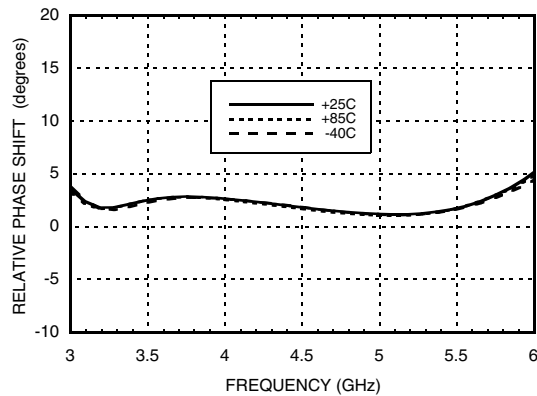


**Insertion Loss vs. Temperature, Major States Only**

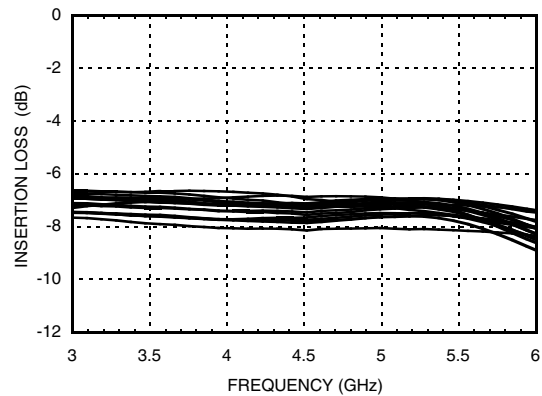



### Phase Error vs. State

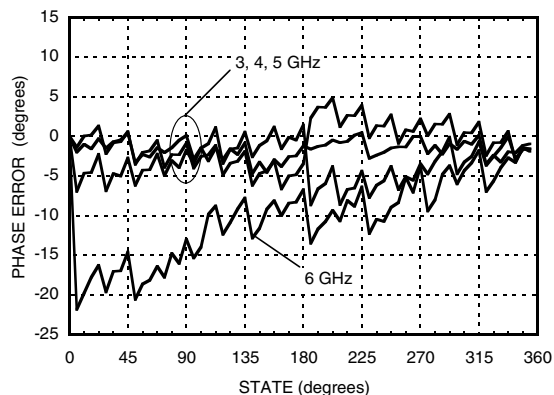

### Absolute Maximum Ratings

|   |                    |
|---|--------------------|
| Input Power (RFIN)                            | 32 dBm (T= +85 °C) |
| Bias Voltage Range (Vdd)                      | -0.2 to +12V       |
| Bias Voltage Range (Vss)                      | +0.2 to -12V       |
| Channel Temperature (Tc)                      | 150 °C             |
| Thermal Resistance (channel to ground paddle) | 160 °C/W           |
| Storage Temperature                           | -65 to +150 °C     |
| Operating Temperature                         | -40 to +85 °C      |



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Bias Voltage & Current

|      |       |
|------|-------|
| Vdd  | Idd   |
| 5.0  | 5.4mA |
| Vss  | Iss   |
| -5.0 | 5.4mA |

### Control Voltage


|          |                           |
|----------|---------------------------|
| State    | Bias Condition            |
| Low (0)  | 0 to 0.2 Vdc              |
| High (1) | Vdd ±0.2 Vdc @ 35 µA Typ. |

### Truth Table

| Control Voltage Input |       |       |       |       |       | Phase Shift (Degrees)<br>RFIN - RFOUT |
|-----------------------|-------|-------|-------|-------|-------|---------------------------------------|
| Bit 1                 | Bit 2 | Bit 3 | Bit 4 | Bit 5 | Bit 6 |                                       |
| 0                     | 0     | 0     | 0     | 0     | 0     | Reference*                            |
| 1                     | 0     | 0     | 0     | 0     | 0     | 5.625                                 |
| 0                     | 1     | 0     | 0     | 0     | 0     | 11.25                                 |
| 0                     | 0     | 1     | 0     | 0     | 0     | 22.5                                  |
| 0                     | 0     | 0     | 1     | 0     | 0     | 45.0                                  |
| 0                     | 0     | 0     | 0     | 1     | 0     | 90.0                                  |
| 0                     | 0     | 0     | 0     | 0     | 1     | 180.0                                 |
| 1                     | 1     | 1     | 1     | 1     | 1     | 354.375                               |

Any combination of the above states will provide a phase shift approximately equal to the sum of the bits selected.

\*Reference corresponds to monotonic setting

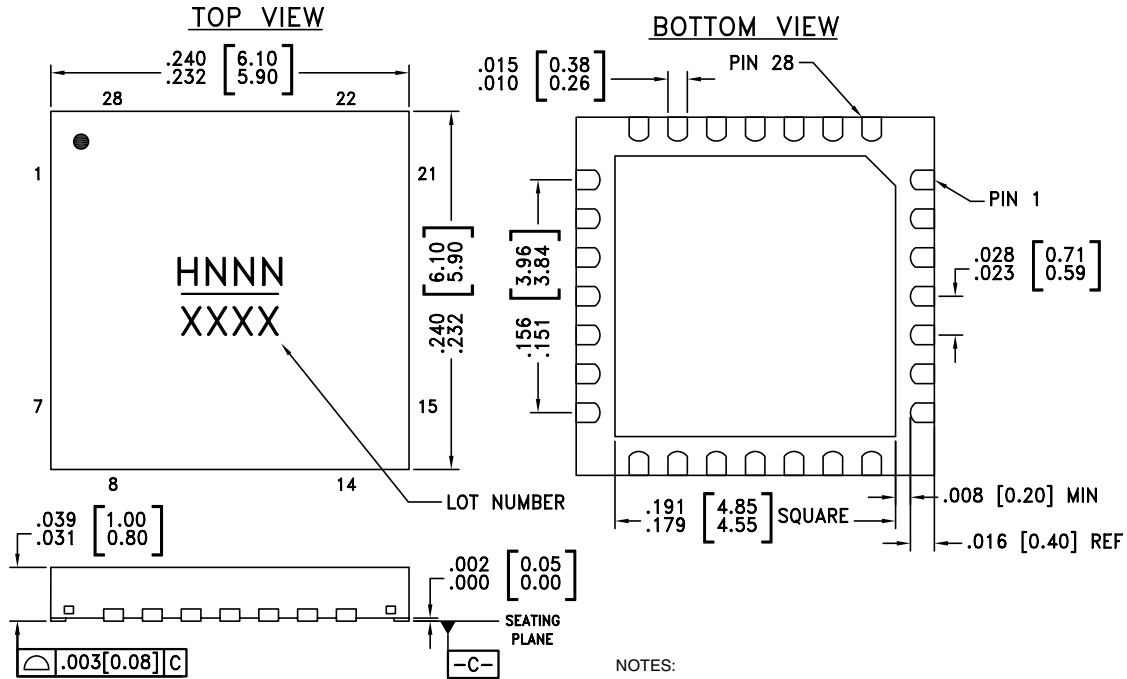**Outline Drawing**

**NOTES:**

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS].
3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.
6. CLASSIFIED AS MOISTURE SENSITIVITY LEVEL (MSL) 1.

**Package Information**

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC649LP6   | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | H646<br>XXXX                   |
| HMC649LP6E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H649<br>XXXX                   |





[1] Max peak reflow temperature of 235 °C


[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX



**Pin Descriptions**

| Pin Number          | Function                              | Description  | Interface Schematic  |
|---------------------|---------------------------------------|--|--|
| 1                   | Vdd                                   | Voltage supply.  |  |
| 2, 20               | GND                                   | These pins and exposed ground paddle must be connected to RF/DC ground.                            |   |
| 3                   | RFIN                                  | This port is DC coupled and matched to 50 Ohms.  |   |
| 4 - 18              | N/C                                   | No connection required. These pins may be connected to RF/DC ground without affecting performance. |  |
| 19                  | RFOUT                                 | This port is DC coupled and matched to 50 Ohms.  |   |
| 22 - 24,<br>26 - 28 | BIT6, BIT5, BIT4,<br>BIT3, BIT2, BIT1 | Control Input. See truth table and control voltage tables.   |  |
| 25                  | Vss                                   | Voltage supply.  |  |

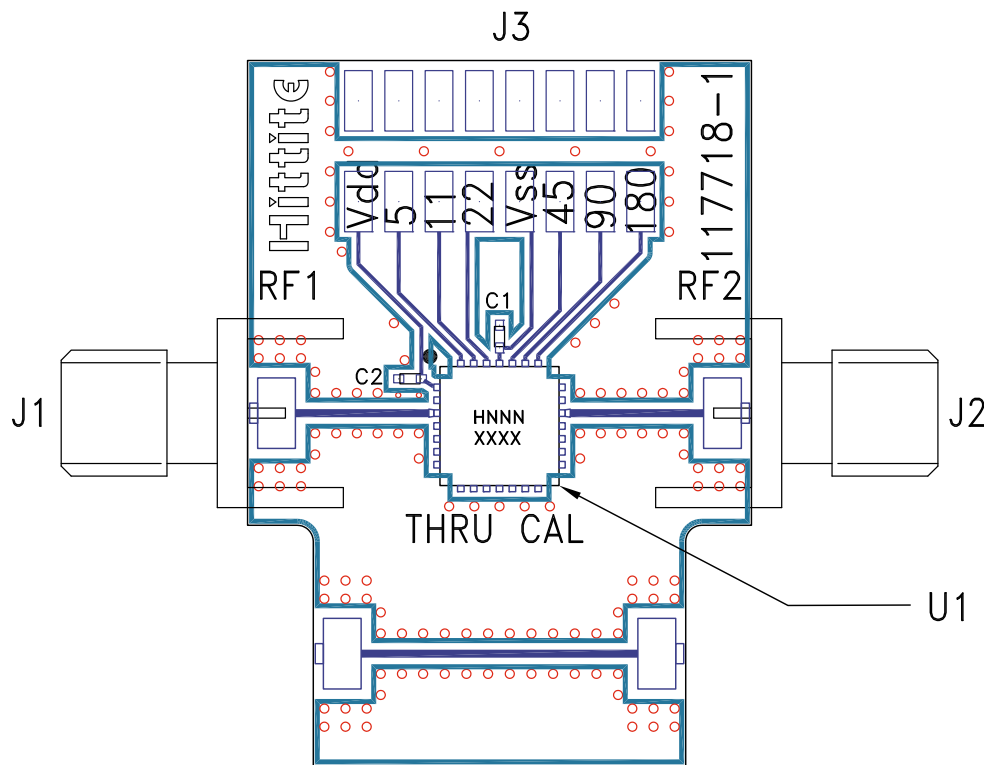**Evaluation PCB**

**List of Materials for Evaluation PCB 117720 [1][3]**

| Item    | Description                              |
|---------|--|
| J1 - J2 | PCB Mount SMA RF Connector               |
| J3      | Header 2mm, 16 Pins                      |
| C1,C2   | 1000pF Capacitor, 0402 Pkg.              |
| U1      | HMC649LP6(E) 6-Bit Digital Phase Shifter |
| PCB [2] | 117718 Evaluation PCB                    |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

[3] Please refer to part's pin description and functional diagram for pin out assignments on evaluation board.

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.





**Notes:**