



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






FEATURES

Small Size - Low Cost

APPLICATIONS

Filtering - Bypass - Coupling - Blocking

Operating Temperature Range		-40°C to +85°C										
Capacitance Tolerance		+20% at 120 Hz, 20°C										
Surge voltage	WVDC	4	6.3	10	16	25	35	50	63	100		
	SVDC	5.2	7.9	13	20	32	44	63	79	125		
Dissipation Factor	WVDC	4	6.3	10	16	25	35	50	63	100		
	tan δ	.35	.28	.24	.2	.14	.14	.12	.12	.1		
Leakage current		2 Minutes										
		.01CV or 3uA, Whichever is greater										
Low temperature stability Impedance ratio (120 Hz)	Rated WVDC		4	6.3	10	16	25	35	50	63	100	
	-25°C to +20°C	D<8	7	4	3	2	2	2	2	2	2	
		D≥8	7	5	4	3	2	2	2	2	2	
	-40°C to +20°C	D<8	15	8	6	4	4	3	3	3	3	
D≥8		15	10	8	6	4	3	3	3	3		
Load Life		2000 hours at 85°C with rated WVDC and ripple current applied										
		Capacitance change	≤20% of initial measured value									
		Dissipation factor	≤200% of maximum specified value									
		Leakage current	≤100% of maximum specified value									
Shelf Life		1000 hours at 85°C with no voltage applied										
		Capacitance change	≤20% of initial measured value									
		Dissipation factor	≤200% of maximum specified value									
		Leakage current	≤100% of maximum specified value									
Resistance to soldering heat		Capacitors placed on a 250C hot plate for 30 seconds with their electrode terminations facing downward will fulfill the following conditions after being cooled to room temperature										
		Capacitance change	≤10% of initial measured value									
		Dissipation factor	≤200% of maximum specified value									
		Leakage current	≤100% of maximum specified value									
Ripple Current Multipliers		Frequency (Hz)					Temperature (°C)					
		50	120	400	1k	10k	100k	85	70	65		
		0.7	1.0	1.17	1.36	1.5	1.5	1.0	1.35	1.35		

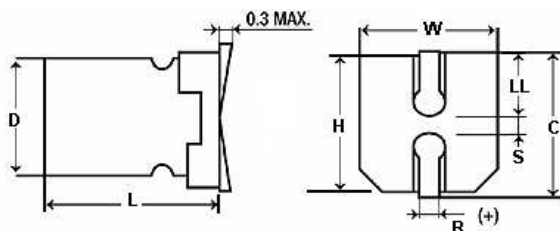

D	L	W±0.2	H±0.2	C±0.2	R	LL±0.2	S±0.2
4	5.4 +0.1/-0.2	4.3	4.3	5.0	0.5~0.8	1.8	1.0
5	5.4 +0.1/-0.2	5.3	5.3	6.0	0.5~0.8	2.1	1.4
6.3	5.4 +0.1/-0.2	6.6	6.6	7.3	0.5~0.8	2.4	2.2
6.3	5.8 +0.1/-0.2	6.6	6.6	7.3	0.5~0.8	2.4	2.2
6.3	7.7 +0.1/-0.2	6.6	6.6	7.3	0.5~0.8	2.4	2.2
8	6.2 +0.1/-0.2	8.3	8.3	9.0	0.7~1.0	2.4	3.2
8	10.2+0.1/-0.2	8.3	8.3	9.0	0.7~1.0	2.8	3.2
10	10.2+0.1/-0.2	10	10	11.0	0.7~1.0	3.2	4.6

SML

+85°C Standard 2000 hrs

Capacitance (µF)	WVDC	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum RMS Ripple Current (mA) 120 Hz, +85°C	Dims DxL (mm)
0.1	50	104SML050MD4	1989.44	3.2	4x5.4
0.22	50	224SML050MD4	904.29	4.7	4x5.4
0.33	50	334SML050MD4	602.86	5.7	4x5.4
0.47	50	474SML050MD4	423.28	6.8	4x5.4
1	50	105SML050MD4	198.944	10	4x5.4
2.2	50	225SML050MD4	90.429	15	4x5.4
3.3	50	335SML050M	60.29	18	4x5.4
3.3	100	335SML100M	50.24	28	6.3x5.8
4.7	35	475SML035M	49.38	20	4x5.4
4.7	50	475SML050M	42.33	24	4x5.4
4.7	50	475SML050MD5	42.33	25	5x5.4
4.7	100	475SML100MD8	3.53	60	8x10.5
10	16	106SML016M	33.16	26	4x5.4
10	35	106SML035M	23.21	34	5x5.4
10	35	106SML035MD4	23.21	24	4x5.4
10	50	106SML050MD5	19.894	41	5x5.4
10	50	106SML050M	19.894	43	6.3x5.4
10	63	106SML063MEL	19.89	50	6.3x7.7
10	63	106SML063M	19.89	34	6.3x5.4
10	100	106SML100M	16.57	50	6.3x7.7
10	100	106SML100MD8	16.579	85	8x10.5
22	6.3	226SML6R3M	21.1	31	4x5.4
22	16	226SML016M	12.057	44	5x5.4
22	16	226SML016MD4	12.057	30	4x5.4
22	25	226SML025MD5	12.06	38	5x5.4
22	35	226SML035M	10.55	59	6.3x5.4
22	50	226SML050M	9.043	71	6.3x5.4
22	63	226SML063MD8	9.043	120	8x10.5
22	63	226SML063M	9.04	70	6.3x7.7
22	100	226SML100M	7.54	120	8x10.5
33	4	336SML004M	17.58	31	4x5.4
33	10	336SML010MD4	12.057	34	4x5.4
33	10	336SML010M	12.057	48	5x5.4
33	25	336SML025M	8.038	67	6.3x5.4
33	25	336SML025MD5	8.038	46	5x5.4
33	35	336SML035M	7.033	65	6.3x5.4
33	50	336SML050M	6.029	85	6.3x7.7
33	50	336SML050MD8	6.029	95	8x6.2
33	63	336SML063M	6.03	117	8x10.5
33	100	336SML100M	5.02	100	8x10.5
47	4	476SML004M	12.35	37	4x5.4
47	6.3	476SML6R3MD4	9.877	40	4x5.4
47	6.3	476SML6R3M	9.877	52	5x5.4
47	16	476SML016M	7.055	75	6.3x5.4
47	16	476SML016MD5	7.055	52	5x5.4
47	25	476SML025M	5.644	70	6.3x5.4
47	35	476SML035M	4.938	70	6.3x5.8
47	35	476SML035MD8	4.938	105	8x6.2
47	50	476SML050M	4.23	105	6.3x7.7
47	50	476SML050MD8	4.23	140	8x10.5
47	63	476SML063M	4.23	170	8x10.5
47	100	476SML100M	3.5274	130	10x10.5
68	6.3	686SML6R3M	6.826	50	5x5.4
68	16	686SML016M	4.876	78	6.3x5.4
100	4	107SML004M	5.83	63	5x5.4
100	6.3	107SML6R3M	4.642	54	5x5.4
100	16	107SML016M	3.316	103	6.3x5.4
100	25	107SML025M	2.653	145	8x6.2

SML

+85°C Standard 2000 hrs

Capacitance (µF)	WVDC	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum RMS Ripple Current (mA) 120 Hz, +85°C	Dims DxL (mm)
100	35	107SML035M	2.321	120	6.3x7.7
100	50	107SML050M	1.99	200	8x10.5
100	50	107SML050MD10	1.99	250	10x10.5
100	63	107SML063M	1.99	280	10x10.5
150	4	157SML004M	3.868	84	6.3x5.4
150	10	157SML010M	2.653	88	6.3x5.4
150	16	157SML016M	2.21	135	6.3x7.7
150	35	157SML035MD8	1.547	220	8x10.5
220	4	227SML004M	2.64	110	6.3x5.4
220	6.3	227SML6R3M	2.11	91	6.3x5.8
220	10	227SML010M	1.8086	250	8x6.5
220	16	227SML016MD8	1.507	280	8x10.5
220	16	227SML016M	1.507	162	6.3x7.7
220	25	227SML025M	1.206	250	10x7.7
220	25	227SML025MD8	1.206	230	8x10.5
220	35	227SML035MD10	0.9	310	10x10.5
220	35	227SML035M	0.9	270	8x10.5
220	50	227SML050M	0.9043	320	10x10.5
330	6.3	337SML6R3M	1.407	188	6.3x7.7
330	6.3	337SML6R3MD8	1.407	190	8x6.2
330	25	337SML025MD10	0.7	340	10x10.5
330	25	337SML025M	0.7	270	8x10.5
330	35	337SML035M	0.703	360	10x10.5
470	4	477SML004M	1.24	150	6.3x7.7
470	6.3	477SML6R3M	0.9877	380	8x10.5
470	10	477SML010MD8	0.8466	390	8x10.5
470	16	477SML016MD10	0.7055	330	10x10.5
470	16	477SML016M	0.56	350	8x10.5
470	25	477SML025M	0.49	430	10x10.5
1000	4	108SML004MD8	0.58	300	8x10.5
1000	6.3	108SML6R3M	0.464	370	8x10.5
1000	10	108SML010M	0.398	580	10x10.5
1500	6.3	158SML6R3M	0.3095	750	10x10.5