



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



40mm sq.

San Ace 40



General Specifications

- Material Frame: Plastics (Flammability: UL94V-0),
Impeller: Plastics (Flammability: UL94V-1)
- Expected Life Refer to specifications (L10:Survival rate:90% at 60°C ,
rated voltage, and continuously run in a free air state)
- Lead Wire ⊕red ⊖black or blue (Sensor) yellow
- Storage Temperature -30°C to +70°C (Non-condensing)

40×40×20mm (Mass : 45g) **9P** type


Specifications

The following nos. **have pulse sensors and ribs.**

| Model No. | Rated Voltage [V] | Operating Voltage Range [V] | Rated Current [A] | Rated Input [W] | Rated Speed [min ⁻¹] | Max. Airflow [m ³ /min] [CFM] | Max. Static Pressure [Pa] [inchH ₂ O] | SPL [dB(A)] | Operating Temperature [°C] | Expected Life [h] |
|---------------------|-------------------|-----------------------------|-------------------|-----------------|----------------------------------|--|--|-------------|----------------------------|-------------------|
| 109P0405J601 | 5 | 4.5 to 5.5 | 0.46 | 2.3 | 9,800 | 0.28 9.9 | 98.5 0.396 | 39 | -20 to +70 | 40,000/60°C |
| 109P0405H601 | | | 0.32 | 1.6 | 8,000 | 0.225 8.0 | 65.7 0.264 | 33 | | |
| 109P0405F601 | | | 0.25 | 1.25 | 6,500 | 0.183 6.5 | 45.1 0.181 | 28 | | 60,000/60°C |
| 109P0405M601 | | | 0.12 | 0.60 | 5,000 | 0.136 4.8 | 26.5 0.106 | 24 | | |
| 109P0412G601 | 12 | 7 to 13.8 | 0.28 | 3.36 | 12,500 | 0.35 12.4 | 153.8 0.618 | 44 | -20 to +60 | 40,000/60°C |
| 109P0412D601 | | | 0.18 | 2.16 | 11,000 | 0.31 10.9 | 124 0.498 | 42 | | |
| 109P0412E601 | | | 0.13 | 1.8 | 9,200 | 0.26 9.2 | 87.3 0.351 | 37 | -20 to +70 | 60,000/60°C |
| 109P0412H601 | | | 0.11 | 1.32 | 8,000 | 0.225 8.0 | 65.7 0.264 | 33 | | |
| 109P0412F601 | | | 0.09 | 1.08 | 6,500 | 0.183 6.5 | 45.1 0.181 | 28 | | |
| 109P0412M601 | | | 0.06 | 0.72 | 5,000 | 0.136 4.8 | 26.5 0.106 | 24 | | |
| 109P0424G601 | 24 | 12 to 27.6 | 0.15 | 3.6 | 12,500 | 0.35 12.4 | 153.8 0.618 | 44 | -20 to +60 | 40,000/60°C |
| 109P0424D601 | | 12 to 27.6 | 0.13 | 3.12 | 11,000 | 0.31 10.9 | 124 0.498 | 42 | | |
| 109P0424H601 | | 12 to 27.6 | 0.07 | 1.68 | 8,300 | 0.233 8.2 | 69.6 0.280 | 35 | -20 to +70 | 60,000/60°C |
| 109P0424F601 | | 14 to 27.6 | 0.06 | 1.44 | 6,500 | 0.183 6.5 | 45.1 0.181 | 28 | | |
| 109P0424B601 | | 20.4 to 27.6 | 0.06 | 1.44 | 5,200 | 0.14 4.9 | 28.3 0.114 | 25 | | |

Other sensor specifications are available as options. Please refer to the index (pp. 496 to 497).

Dimensions (unit: mm)

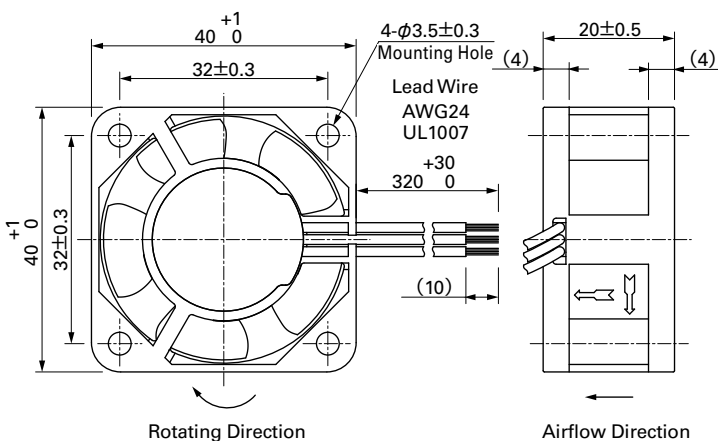


40mm sq.


San Ace 40

40×40×20mm [Mass : 45g]


Airflow - Static Pressure Characteristics

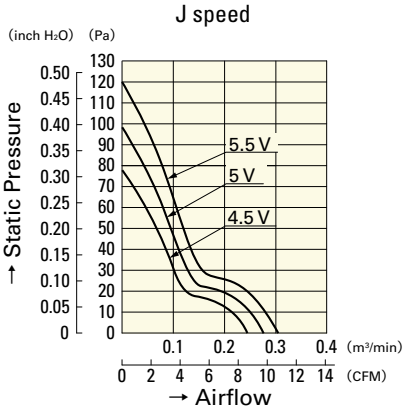


109P0405J601

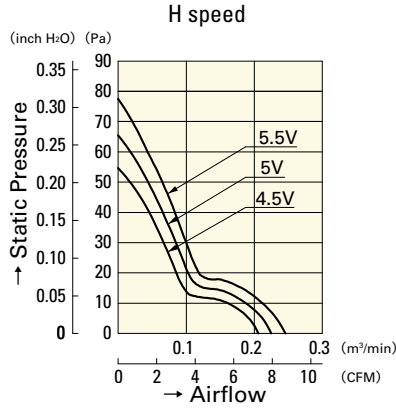


109P0405H601

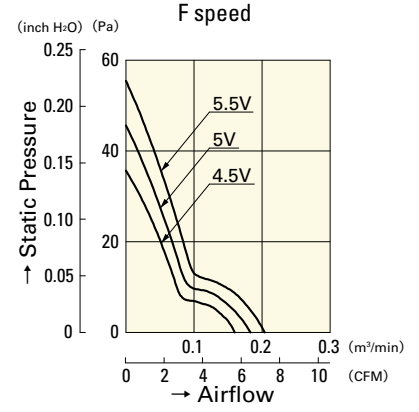


109P0405F601

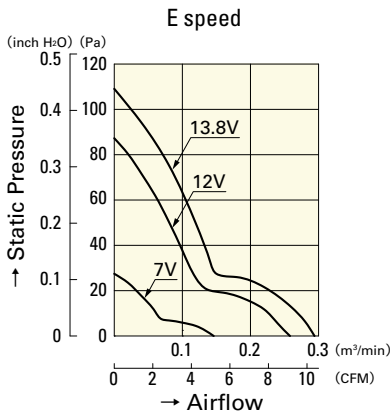


109P0412E601

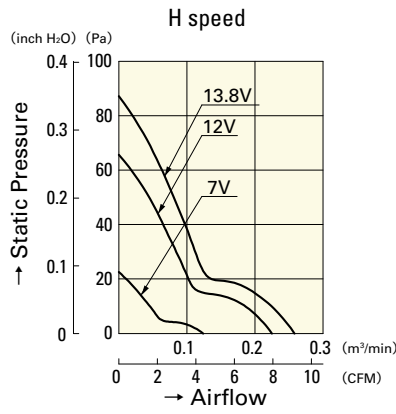


109P0412H601

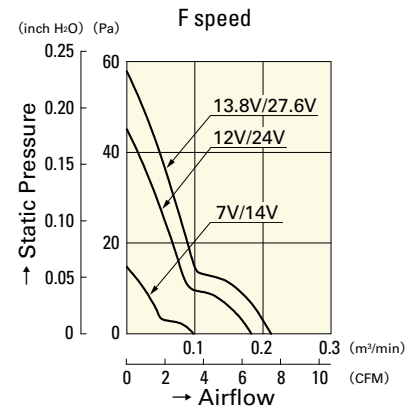


109P0412F601
109P0424F601

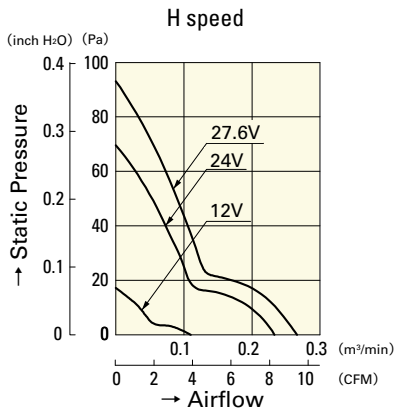


109P0424H601

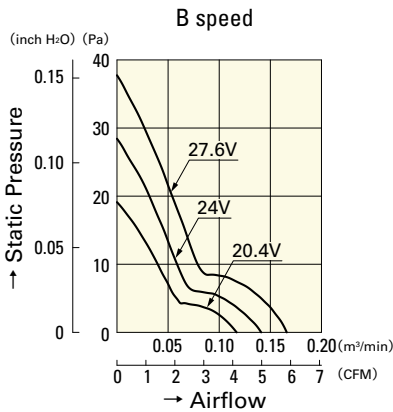


109P0424B601

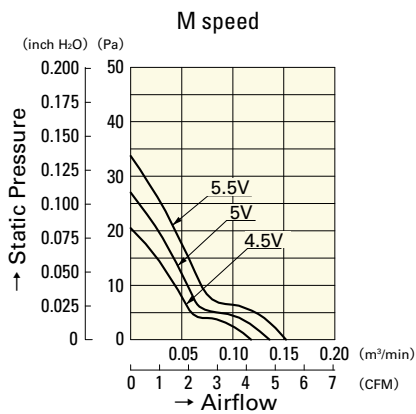


109P0405M601

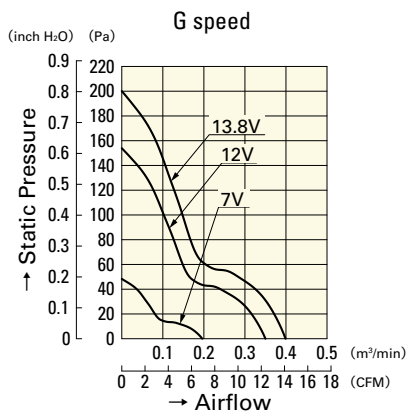


109P0412G601

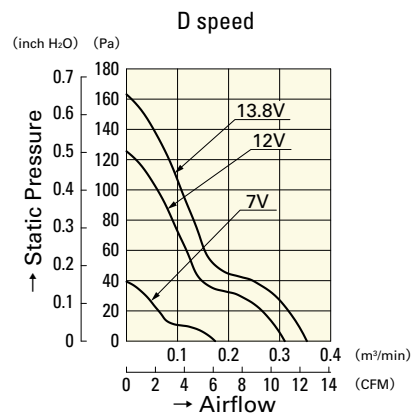


109P0412D601

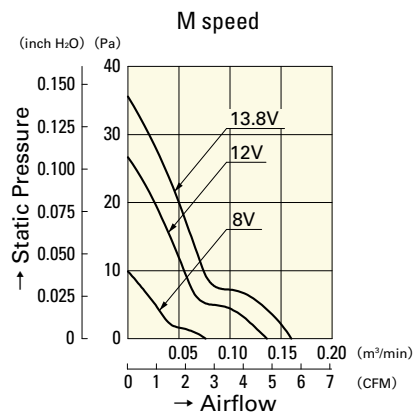

109P0412M601

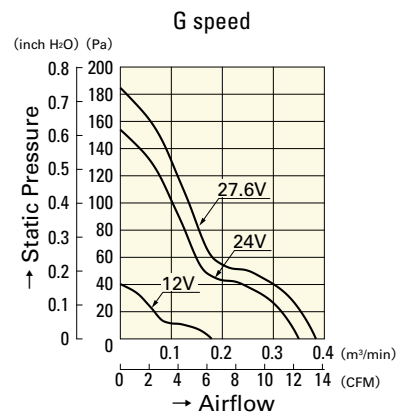

109P0424G601

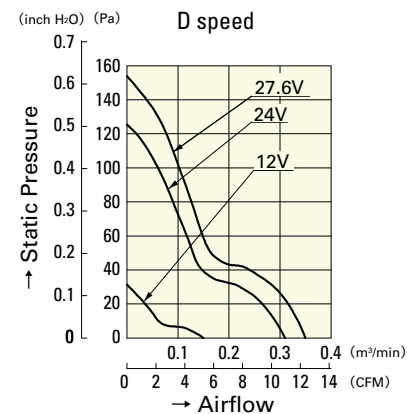

109P0424D601