



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## 400° ANALOG PHASE SHIFTER 1 - 2 GHz




### Typical Applications

The HMC934LP5E is ideal for:

- EW Receivers
- Military Radar
- Test Equipment
- Satellite Communications
- Beam Forming Modules

### Functional Diagram

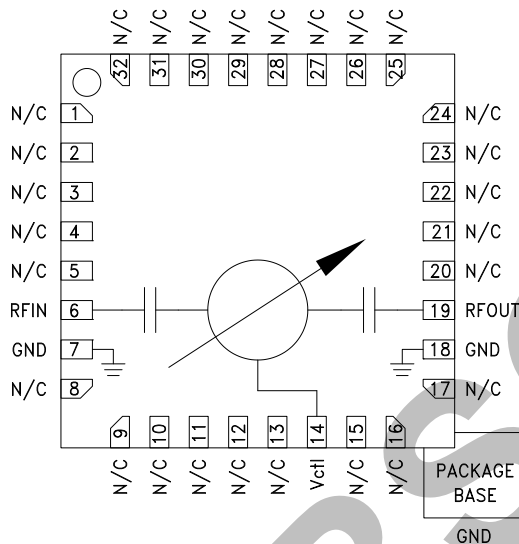

### Features

- Octave Bandwidth: 1 to 2 GHz
- 400° Phase Shift
- Low Insertion Loss: 3.5 dB
- Low Phase Error: +3.5 / -2 deg
- Single Positive Voltage Control
- 32 Lead 5 x 5 mm QFN Package: 25 mm<sup>2</sup>

### General Description

The HMC934LP5E is an Analog Phase Shifter which is controlled via an analog control voltage from 0 to +13V. The HMC934LP5E provides a continuously variable phase shift of 0 to 400 degrees from 1 to 2 GHz, with extremely consistent low insertion loss versus phase shift and frequency. The high accuracy HMC934LP5E is monotonic with respect to control voltage and features a typical low phase error of +3.5 / -2 degrees. The HMC934LP5E is housed in an RoHS compliant 5 x 5 mm QFN leadless package.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , 50 Ohm System


Parameter	Min.	Typ.	Max.	Units
Frequency Range	1		2	GHz
Phase Shift Range		400		deg
Insertion Loss		3.5		dB
Return Loss (input and output)		15		dB
Control Voltage Range	0		13	V
Control Current Range			±1	mA
Input IP3		30		dBm
Input Power @ -5° Shift In Insertion Phase (Vctl = 0V)		9		dBm
Input Power @ -5° Shift In Insertion Phase (Vctl = 0.5V)		13		dBm
Input Power @ -2° shift In Insertion Phase (Vctl = 13V)		16		dBm
Phase Voltage Sensitivity		32		deg/V
Phase Error (peak) <sup>[1]</sup>		+9 / -5		deg
Phase Error (average) <sup>[1]</sup>		+3.5 / -2		deg
Modulation Bandwidth		6		MHz
Insertion Phase Temperature Sensitivity		0.16		deg/°C

[1] Up to a phase shift of 360 degrees.




**400° ANALOG PHASE SHIFTER  
1 - 2 GHz**


**Insertion Loss vs. Frequency**

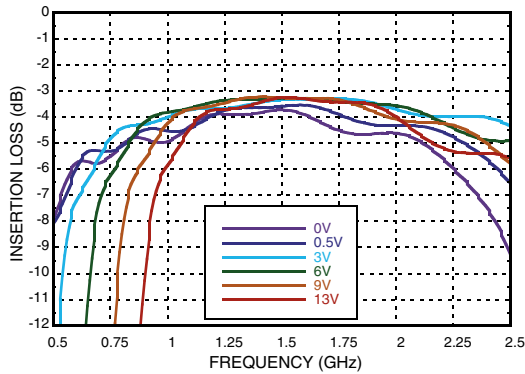


**Insertion Loss vs. Vctl , F = 1.5 GHz**

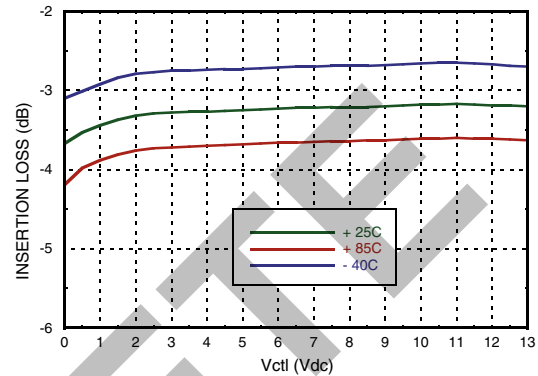


**Phase Shift vs. Vctl**

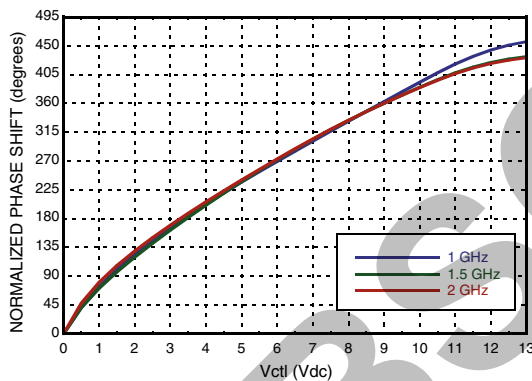


**Phase Shift vs. Frequency  
@ Vctl = 6V (Relative to Vctl = 0V)**

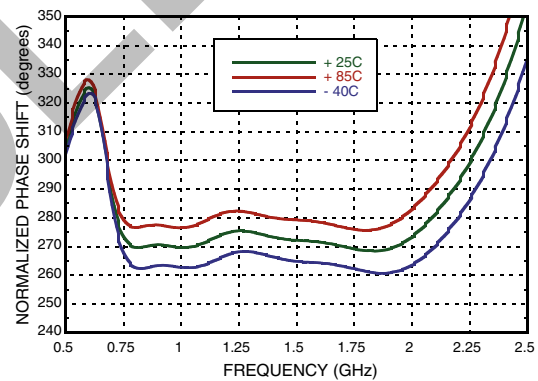

**Phase Shift vs. Frequency  
(Relative to Vctl = 0V) Vctl = 0 to 13V**

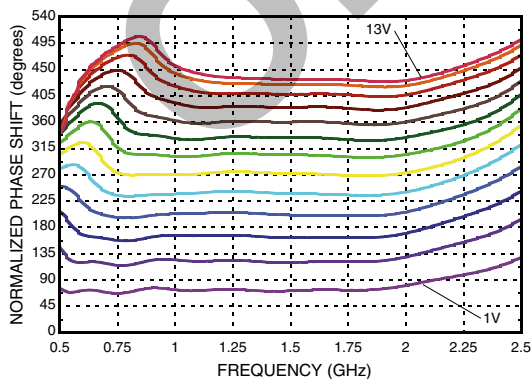

**Phase Error vs. Frequency, Fmean = 1.5 GHz [1]**

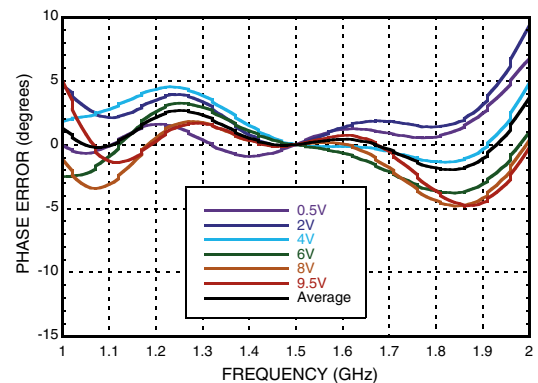


[1] 0 to 9.5V provides 0 - 360 degrees phase shift range






**400° ANALOG PHASE SHIFTER  
1 - 2 GHz**


**Second Harmonic vs. Vctl, F = 1.5 GHz**

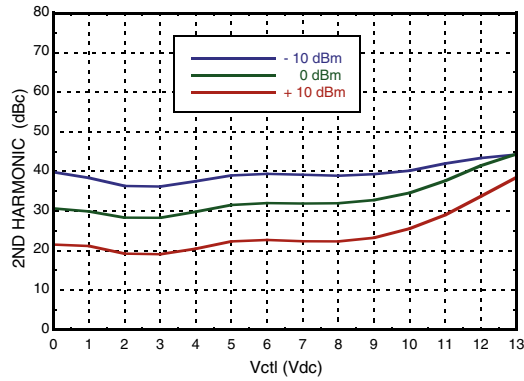


**Third Harmonic vs. Vctl, F = 1.5 GHz**

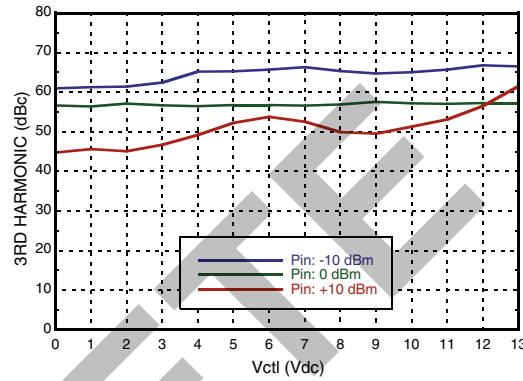


**Input IP3 vs. Vctl, F = 1.5 GHz**

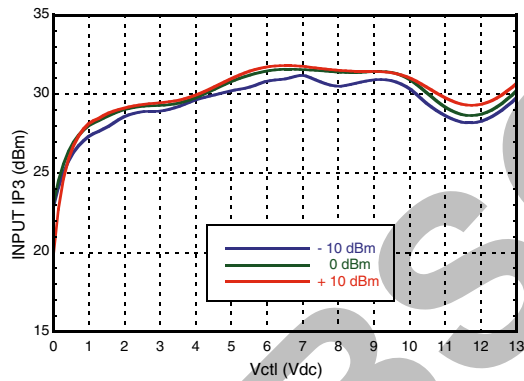


**Insertion Loss vs. Pin @ 1 GHz**

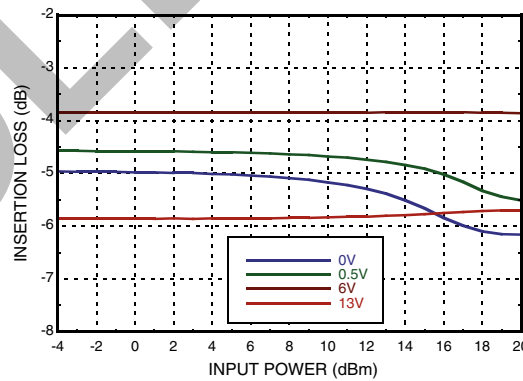

**Insertion Loss vs. Pin @ 1.5 GHz**

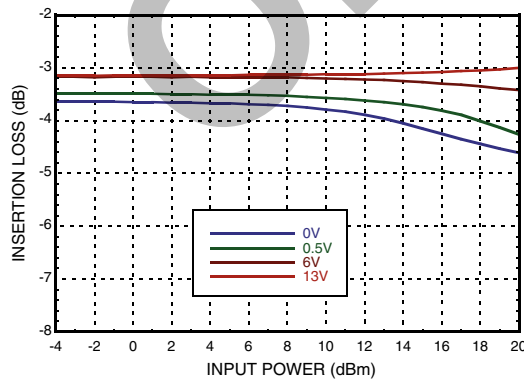

**Insertion Loss vs. Pin @ 2 GHz**

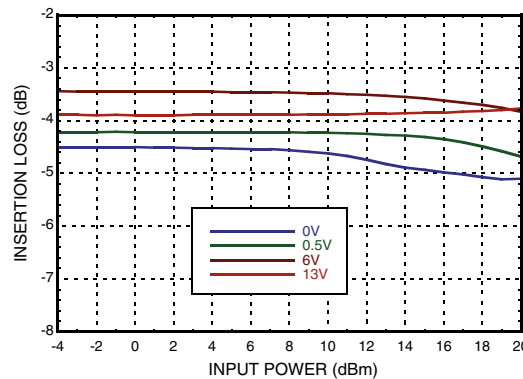


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**400° ANALOG PHASE SHIFTER  
1 - 2 GHz**


**Phase Shift vs. Pin @ 1 GHz**

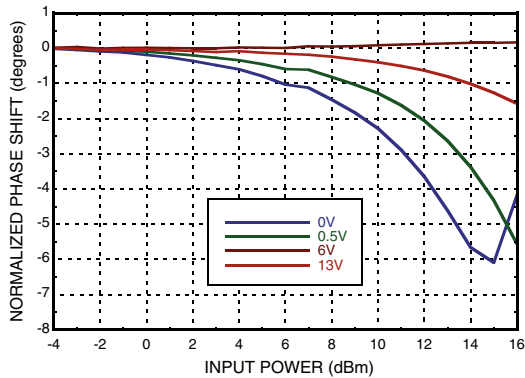


**Phase Shift vs. Pin @ 1.5 GHz**

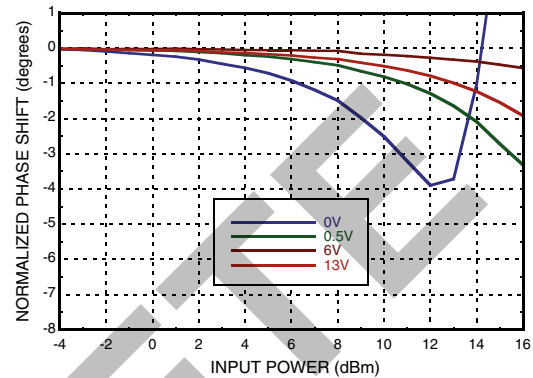


**Phase Shift vs. Pin @ 2 GHz**

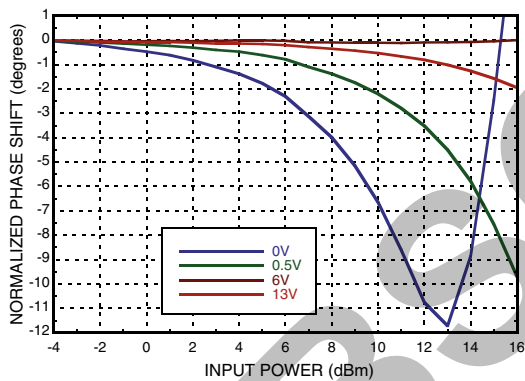

**Input Return Loss vs. Frequency, Vctl = 0 to +13V**

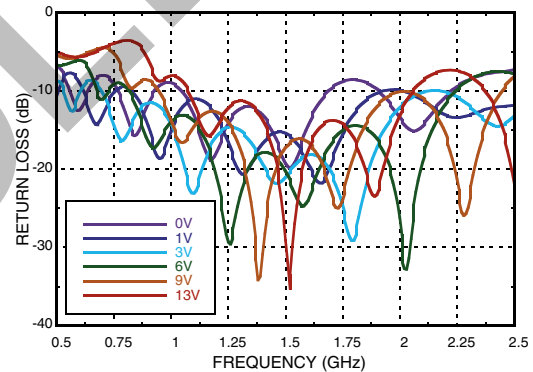

**Output Return Loss vs. Frequency, Vctl = 0 to +13V**

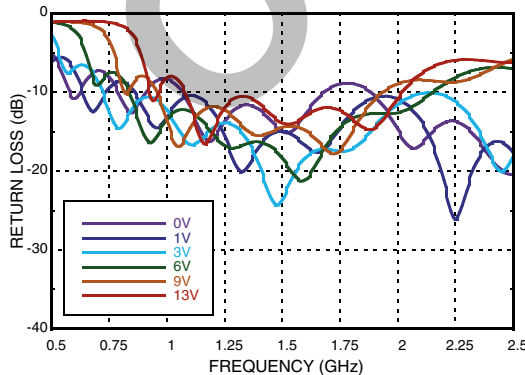

**Absolute Maximum Ratings**

Frequency Control Voltage (Vctl)	-0.5 to +15V
RF Input Power	27 dBm
Storage Temperature	-65 to +150 °C
ESD Sensitivity (HBM)	Class 1B

**Reliability Information**

Junction Temperature To Maintain 1 Million Hour MTTF	150 °C
Nominal Junction Temperature (T = 85 °C and Pin = 10 dBm)	87 °C
Thermal Resistance (Junction To Ground Paddle)	45 °C/W
Operating Temperature	-40 to +85 °C



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D

## 400° ANALOG PHASE SHIFTER 1 - 2 GHz



### Outline Drawing

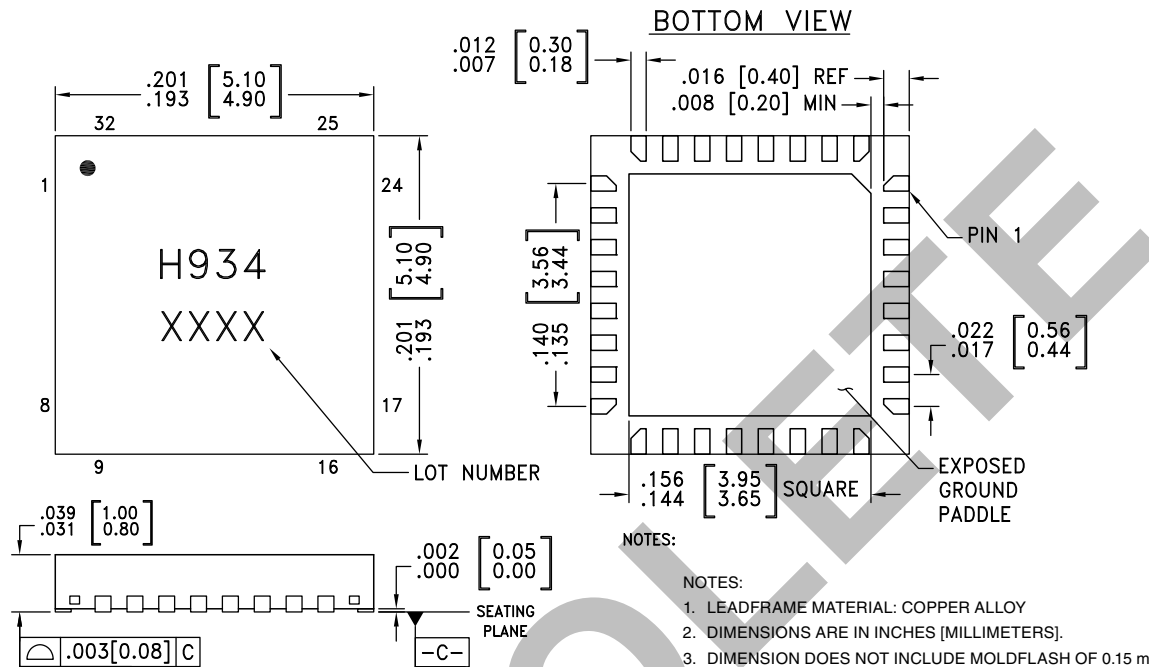

### Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking <sup>[1]</sup>
HMC934LP5E	RoHS-Compliant Low Stress Injection Molded Plastic	100% Matte Sn	MSL1 <sup>[2]</sup>	H934 XXXX

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C

### Pin Descriptions


Pin Number	Function	Description	Interface Schematic
1 - 5, 8 - 13, 15 - 17, 20 - 32	N/C	No connection required. These pins may be connected to RF/DC ground without affecting performance.	
7, 18	GND	Ground: Backside of package has exposed metal ground paddle that must be connected to ground thru a short path. Vias under the device are required.	
6	RFIN	This pin is AC coupled and matched to 50 Ohms.	
19	RFOUT	This pin is AC coupled and matched to 50 Ohms.	
14	Vctl	Phase shift control pin. Application of a voltage between 0 and 13 volts causes the transmission phase to change. The DC equivalent circuit is a series connected diode and resistor.	

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D



### Evaluation PCB

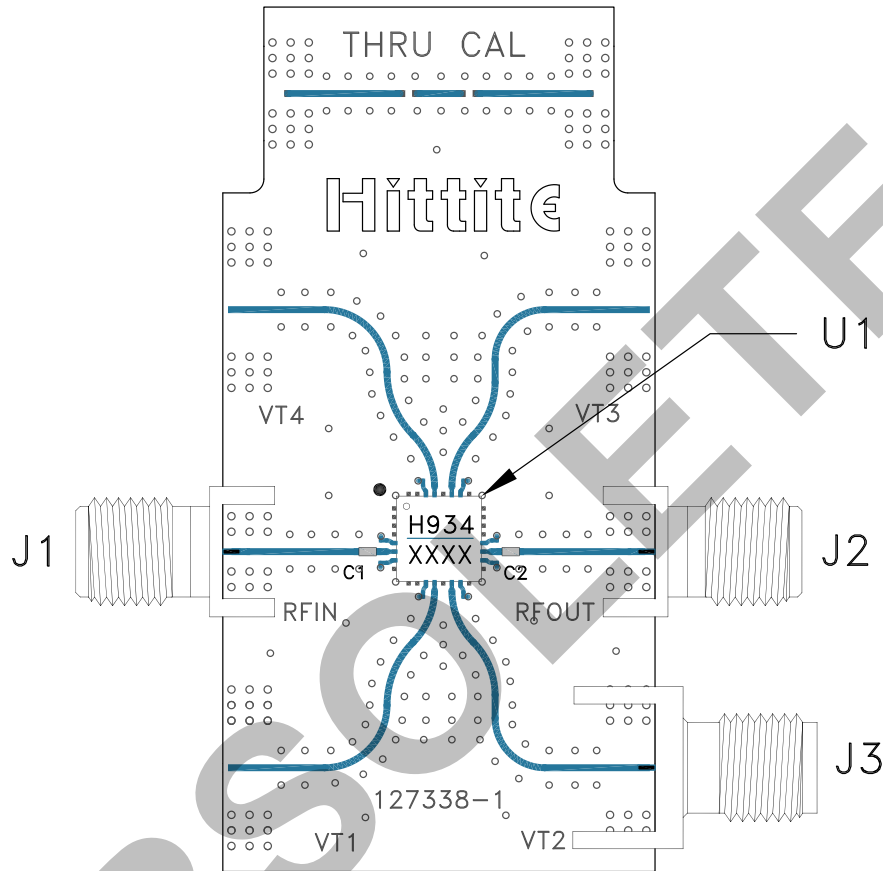

### List of Materials for Evaluation PCB 131046 [1]

Item	Description
J1, J2	Connector, SMA, Jack
J3	Connector, SMA, Jack
U1	HMC934LP5E Analog Phase Shifter
C1, C2	Capacitor, 100 pF, 0402 Pkg.
PCB	127338, Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350 or Arlon 25 FR

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.